
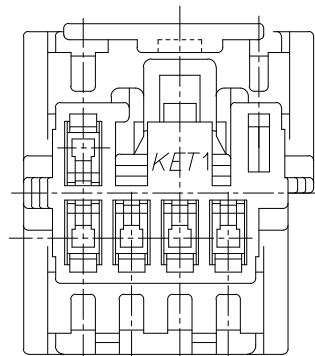
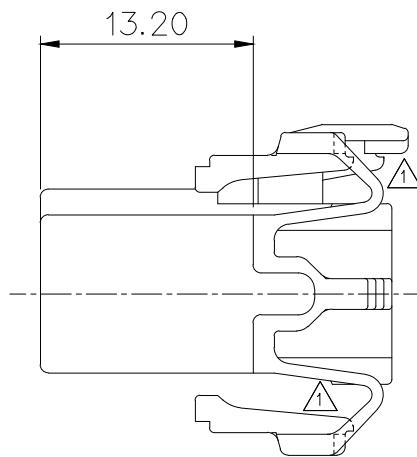
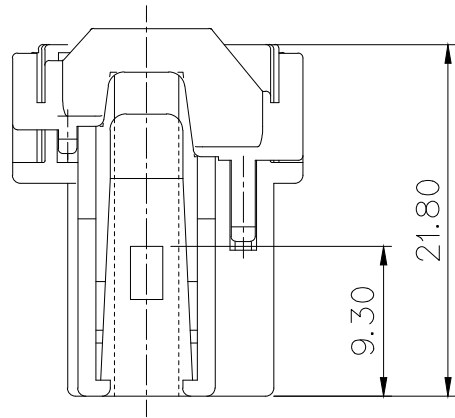
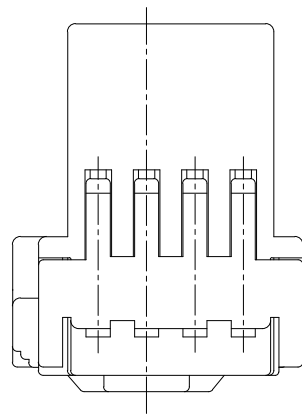
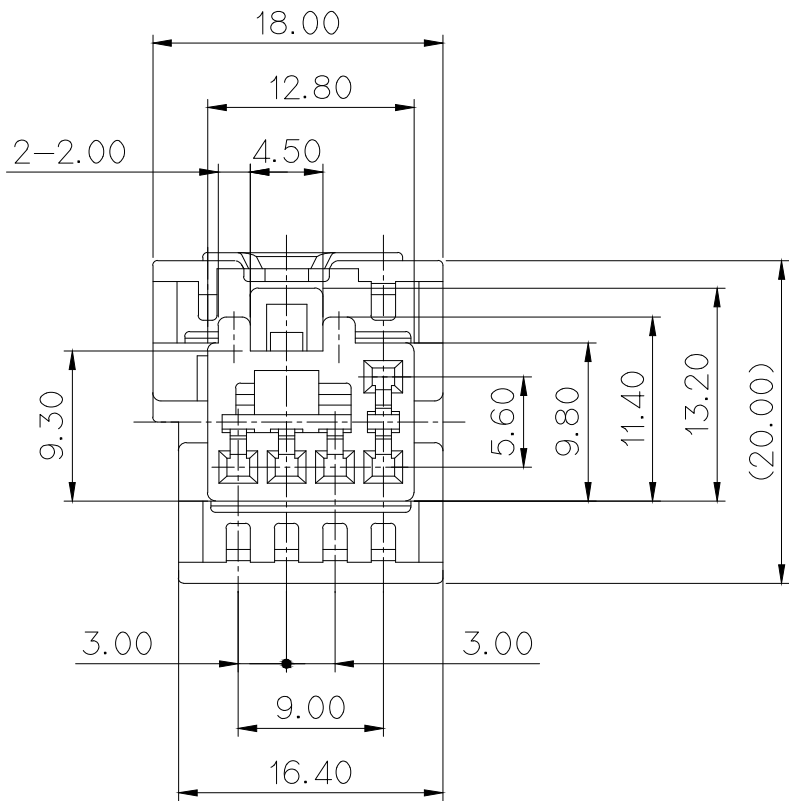


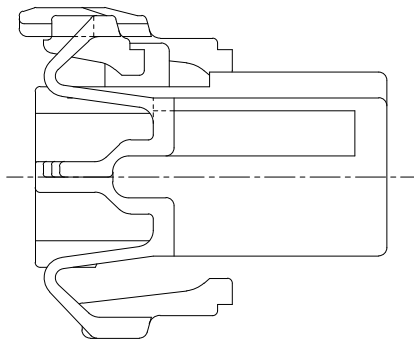


주 기


1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 HOUSING : MG644352 , MG644381
4. 적용 TERMINAL : ST730751,ST731008
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFER TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING : MG644352 , MG644381
5. APPLICABLE TERMINAL : ST730751,ST731008
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

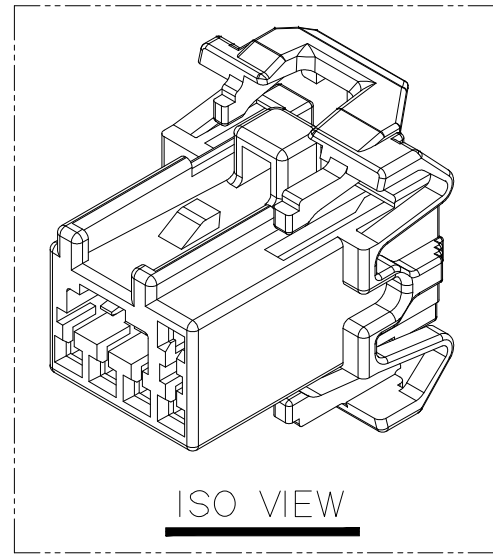

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE .050	
△1	ECO-1503-361근거 도면 재작성		JDR	YSW	BIN	15.03.18			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG614354
DR. KMH 08.07.09			CHK. HSH 08.07.10			PART NAME			
CHK.			APP. KGJ 08.07.10			050 5F HOUSING			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK