


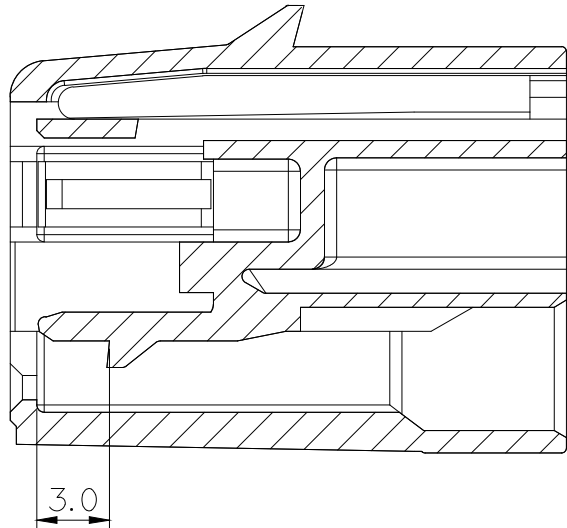
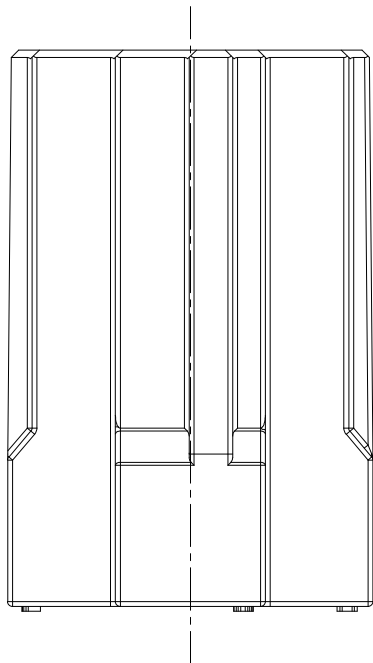
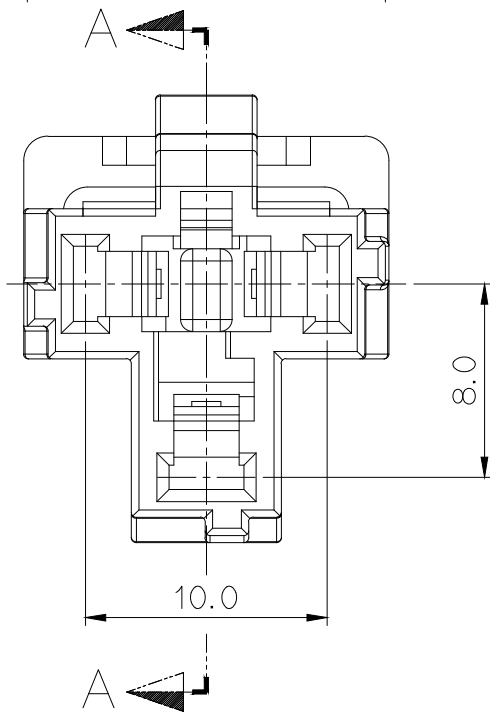
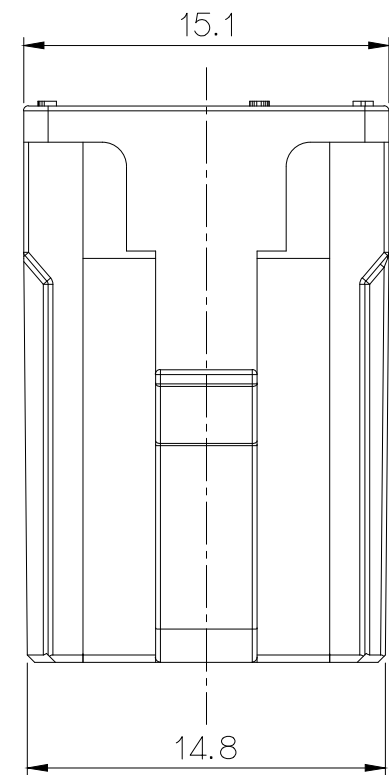


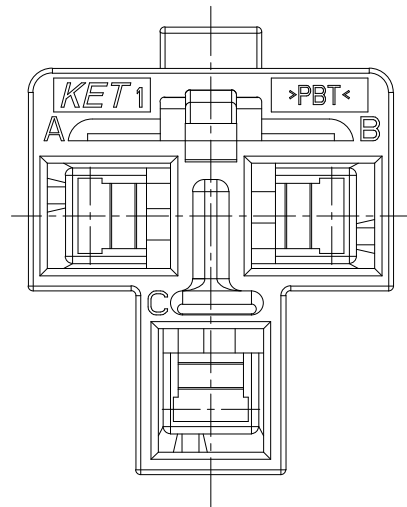

SECTION A-A

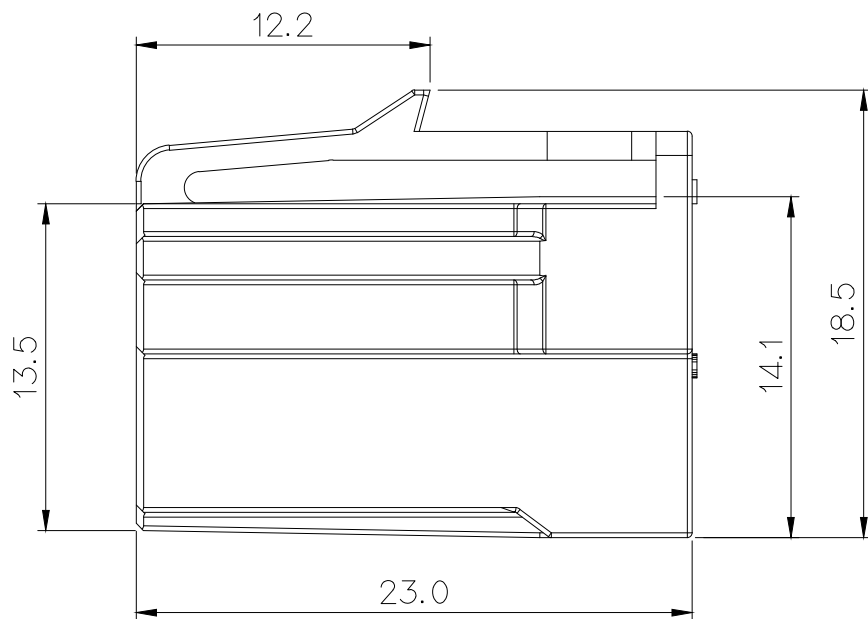

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



ISO - VIEW
(S= 1/1)



△	NO.	MATERIAL	COLOR
	0	PBT	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
*	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

△NOTE

- MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE FEMALE TERMINAL : DELPHI 15304710, 15304712
- APPLICABLE TPA : MG634588
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH 및 변형이 없을 것
- 적용 TERMINAL : DELPHI 15304710 , 15304712
- 적용 TPA : △ MG634588
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 농도를 초과해서는 안된다.

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS GT 280
					INSULATION		TYPE 
△	ECO-2105-119에 근거 도면 재작성	SKM	HYJ	CJH	'21.05.12	TOLERANCE EXCEPT AS NOTED	PART NO. MG614436
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 3/1	
DR.	JUNG,E.S 2010.09.09	CHK.				PART NAME	280 3F HOUSING
CHK.	KMH 2010.09.09	APP.	LSY		2010.09.09		

APPROVED

2021-10-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK