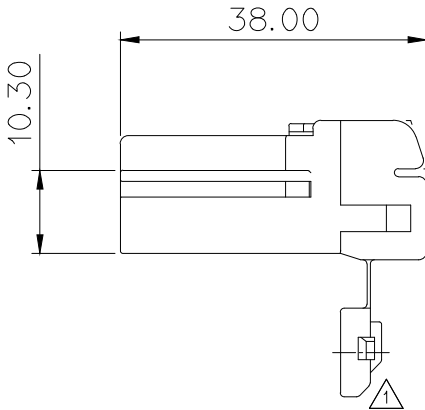
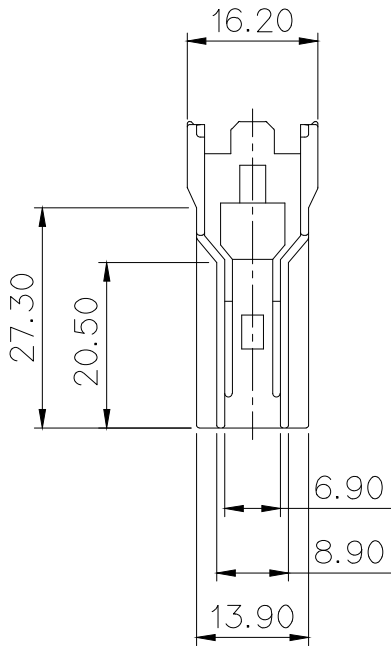

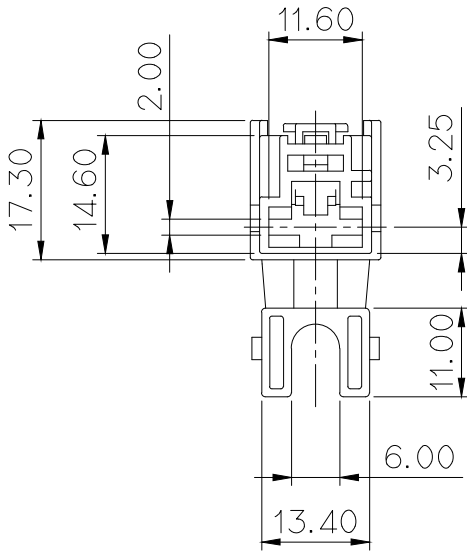
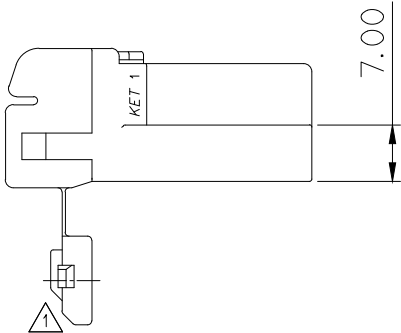
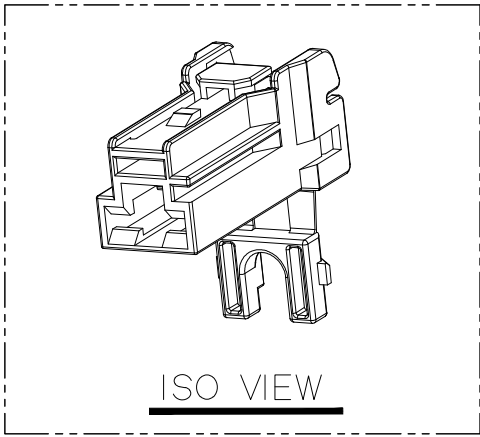


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730722, 730723
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730722, 730723
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

					MATERIAL	PBT	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	NATURAL		
					WIRE RANGE		CLASS	.375
					INSULATION		TYPE	
⚠	설계사양 변경 RO_S9014 근거 형상 변경	KHS			09.03.11			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLPRANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	KHS 2008.12.15	CHK.			08.12.15	SEE TABLE	1/1	MG614449
CHK.					08.12.15	PART NAME	.375 1F Housing (L TYPE)	