








PART NO. MG614450

CUSTOMER DRAWING

(DIMENSIONS IN MM)



ISO VIEW

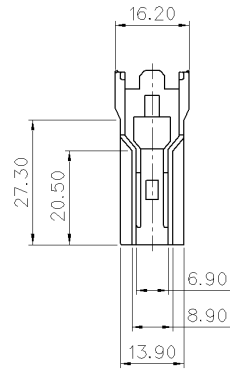

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730722, 730723
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730722, 730723
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

						MATERIAL		PBT	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH		BLACK			
						WIRE RANGE		CLASS .375			
						INSULATION		TYPE			
△ 설계서양 변경 RO_S9014 근거 형상 변경						KHS	APP.	09.03.11			
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		
						SEE TABLE		SCALE 1/1	PART NO. MG614450		
DR. KHS 2008.12.15						CHK.	08.12.15		PART NAME .375 1F Housing (R TYPE)		
CHK. 08.12.15						APP.	08.12.15				