
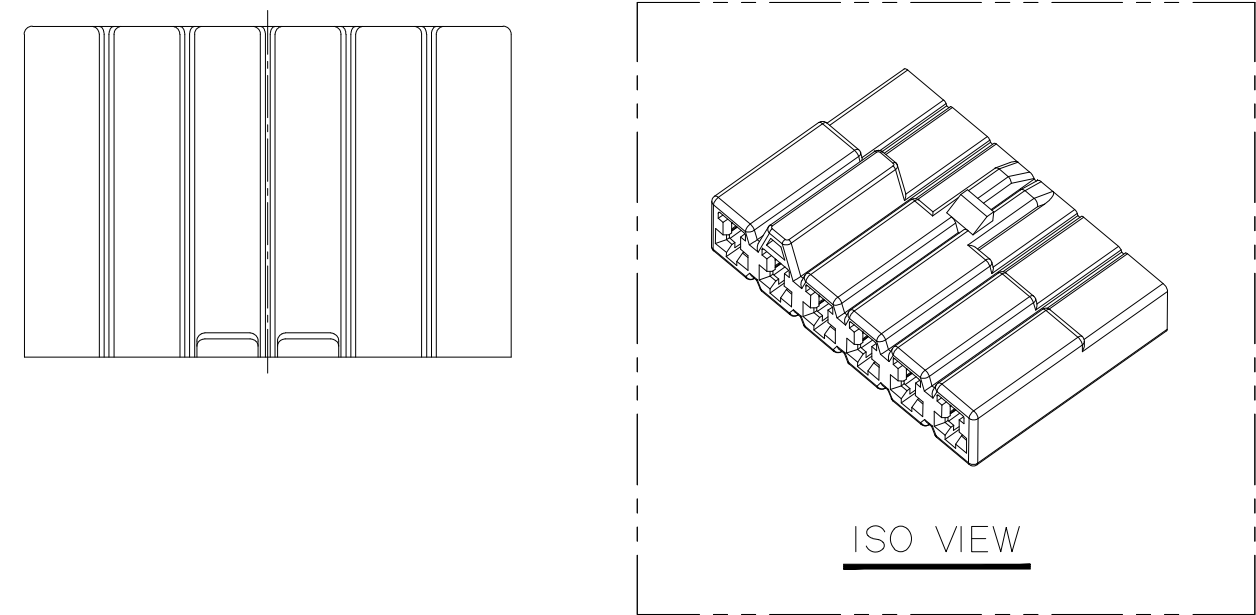


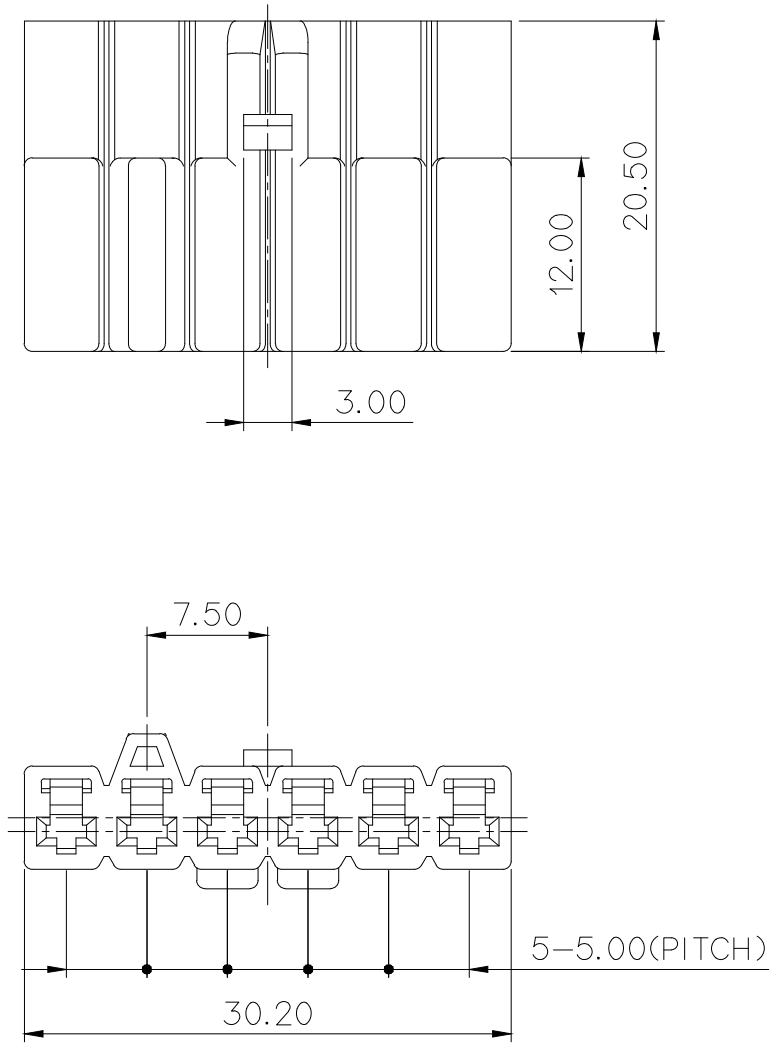


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730675-3, 730676-3, 730677-3, 731100-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730675-3, 730676-3, 730677-3, 731100-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

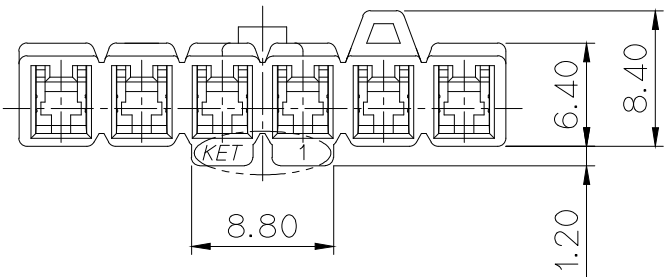

△	PART NO.	MATERIAL	COLOR
	MG614476	P B T	NATURAL
	MG614476-2		BLUE

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE		
						INSULATION		CLASS 090II
△	설계시양변경(R0-S8133)근거 재작성	KHS	HSH	KKJ	08.11.25	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLFRANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG614476
DR.	H.S.KIM '08.08.14	CHK.	JYS	08.14		PART NAME	090II 6F HOUSING (FUEL PUMP)	
CHK.	HSH 08.14	APP.	KKJ	08.14				