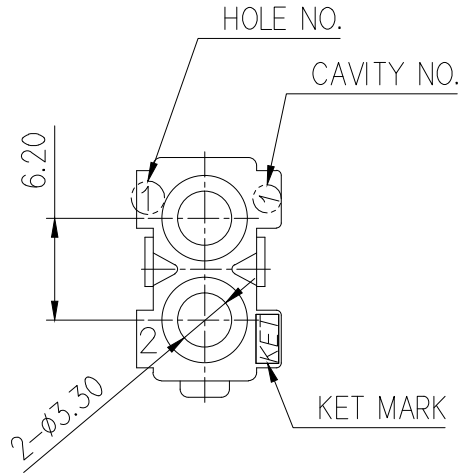
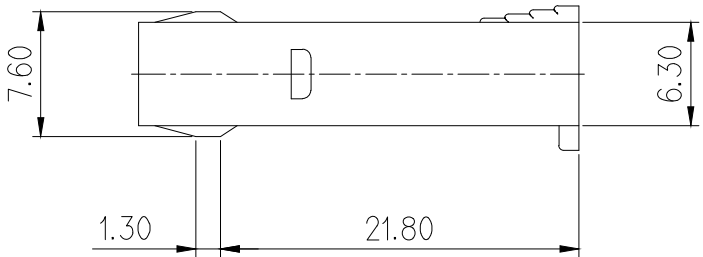
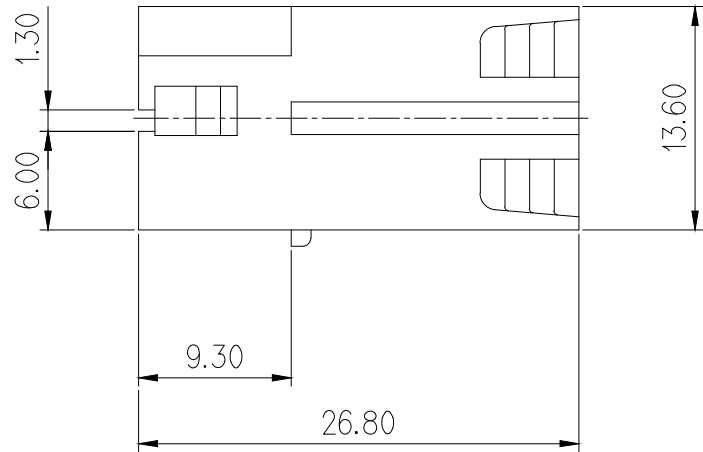
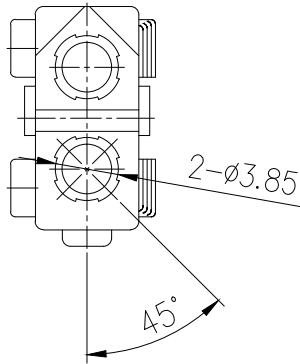


ISO VIEW

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL :ST730205-3/0206-3/0349-3
ST730329-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3.APPLICABLE TERMINAL :ST730205-3/0206-3/0349-3
ST730329-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

PART NO. ∗표시는 색상 표기 임.

∗

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

						MATERIAL	PET+PC(G.W.I.T)		
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
△	ECO-1711-145 근거 도면 재작성	LCM	KSH	BUC	'17.11.13				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG614501T-∗02
	DR. KSH 2008.10.23	CHK.			08.10.23	PART NAME	∅2.0 2F HS'G		
	CHK.	APP.			08.10.23				

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.