


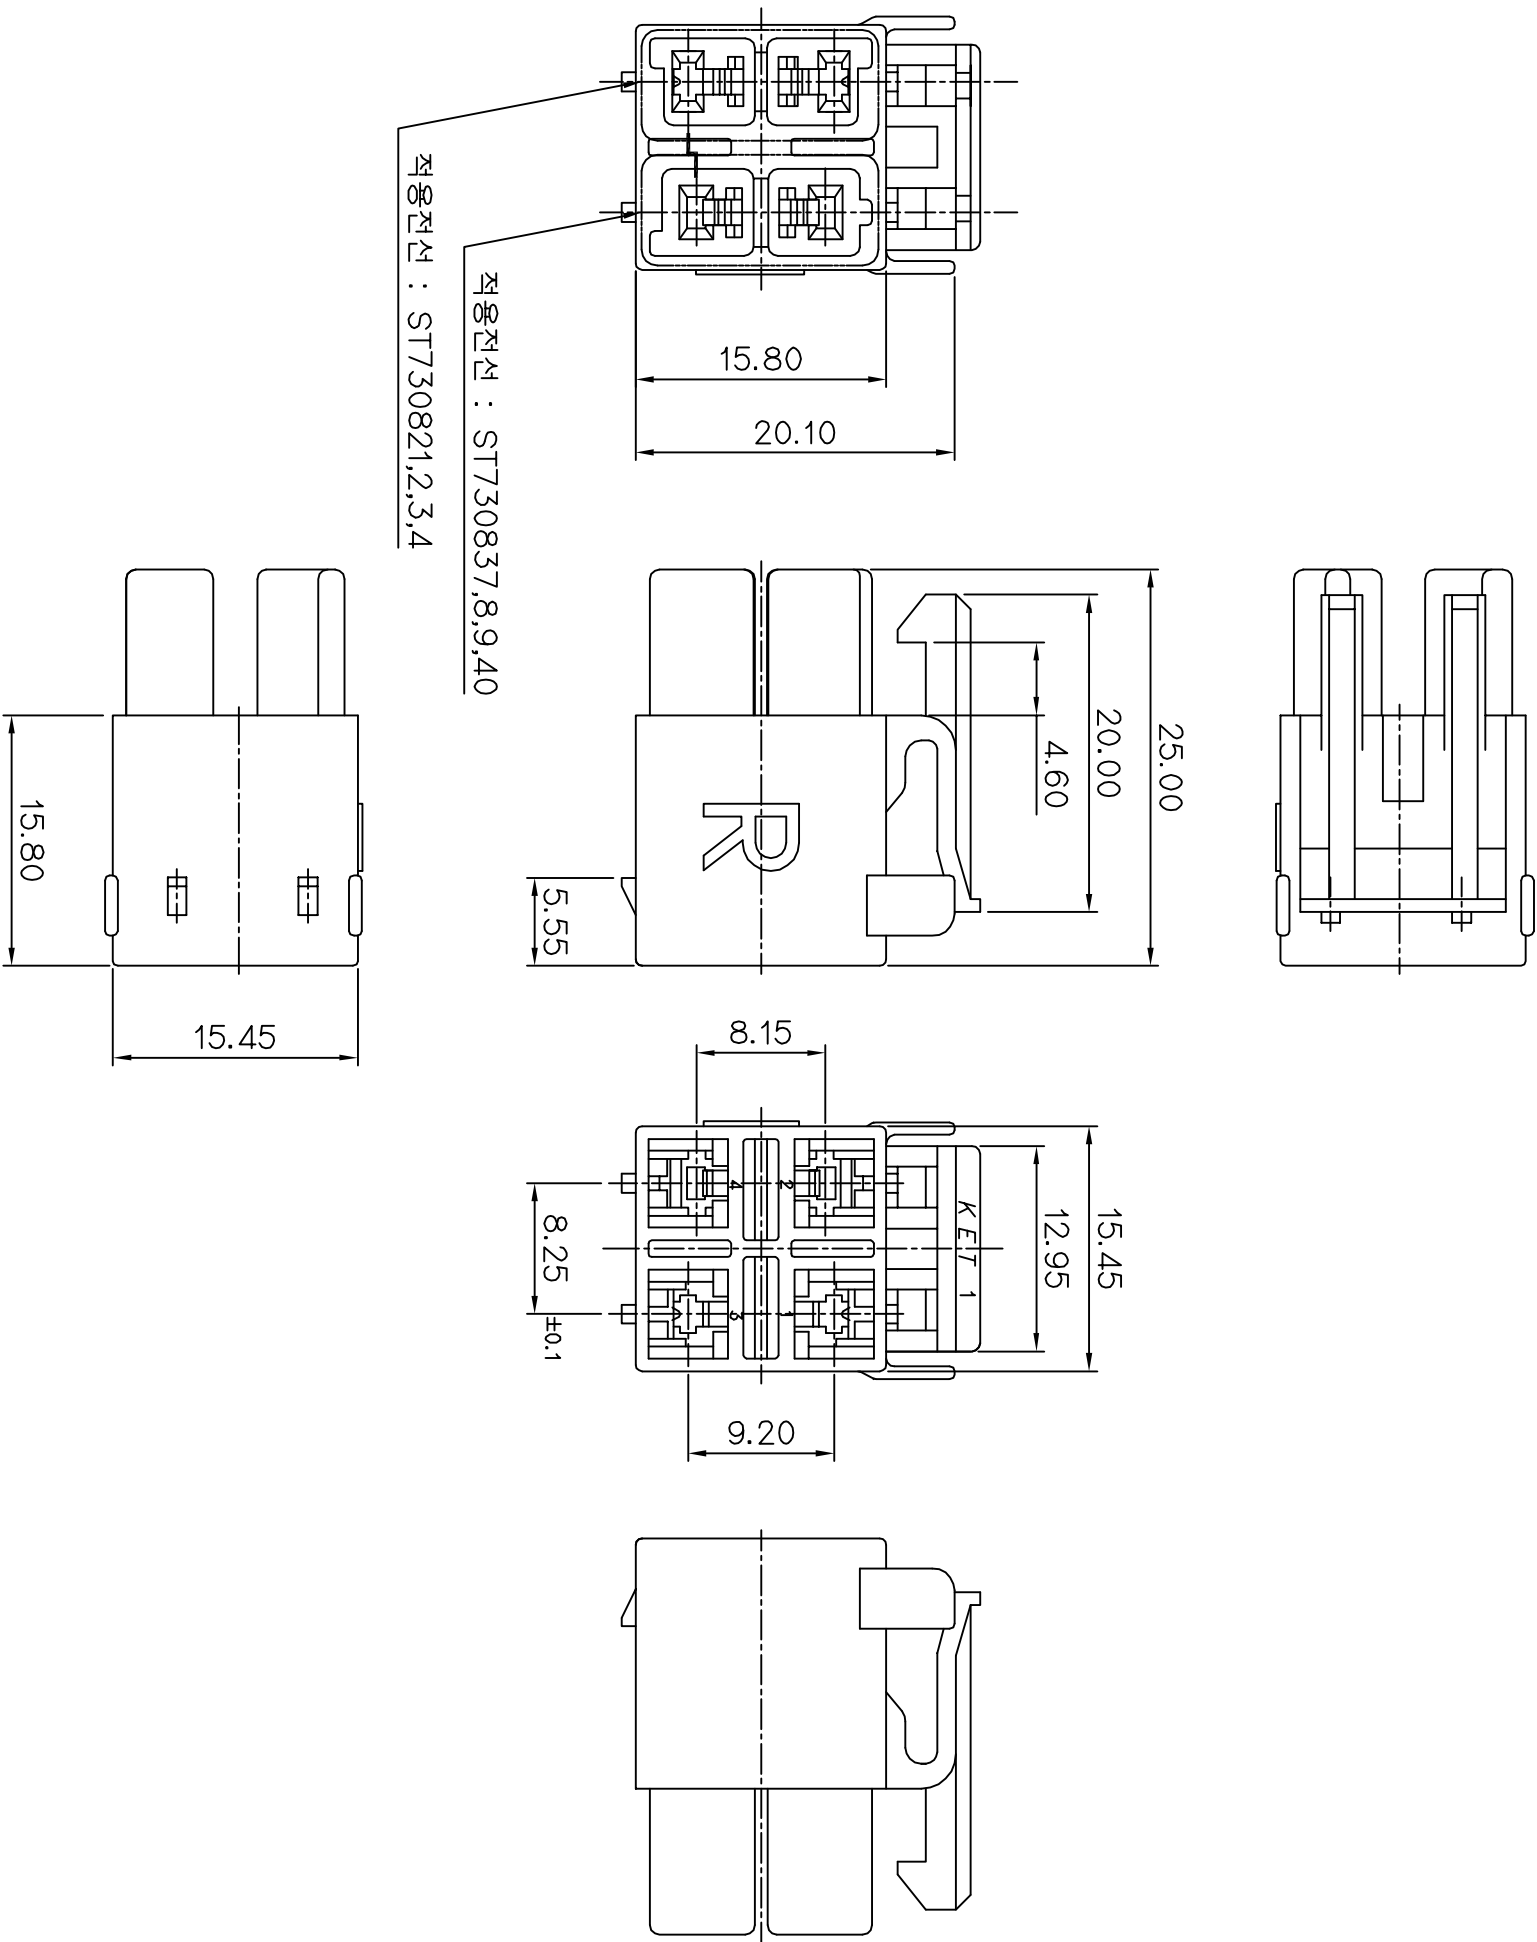

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. 기능상 유효한 BURR 및 WELDLINE 등이 없을 것.
2. 상대 HOUSING : MG622537T/MG622537DT
3. 적용 REAR HOLDER : MG634534
4. 적용 TAB TERMINAL:
 - 1) II : ST730821, 822, 823, 824
 - 2) R : ST730837, 838, 839, 840
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. MATING HOUSING :MG622537T/MG622537DT
3. APPLICABLE REAR HOLDER : MG634534
4. APPLICABLE TAB TERMINAL: 1) II : ST730821, 822, 823, 824 2) R : ST730837, 838, 839, 840
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

	ISSUE MARK					
	MATERIAL △PET+PC(GWIT)	KIEP KOREA ELECTRIC TERMINAL CO., LTD.				
	FINISH NATURAL					
	WIRE RANGE	CLASS				
	INSULATION	TYPE				
△	ECO-1409-기3 근거 도면 제작성	LCM	KSH	BUC	'14.09.19	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE		
DR. LCM	'12.04.03	CHK. KSH	'12.04.03			
CHK.	APP. <i>[Signature]</i>	'12.04.03				
PART NAME 0709 4F HOUSING (R)						