
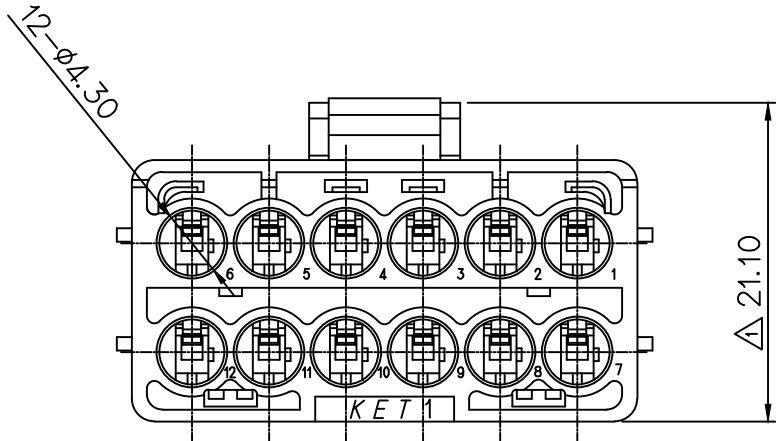
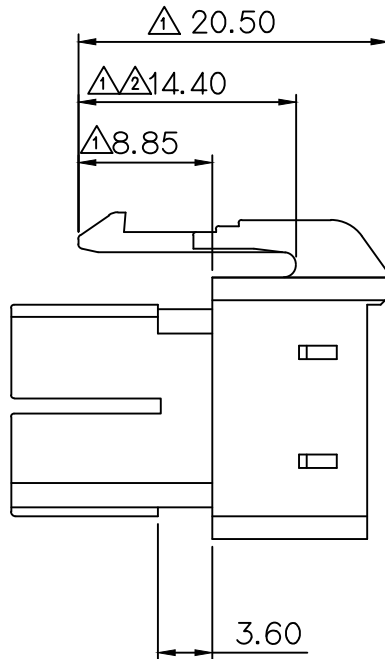
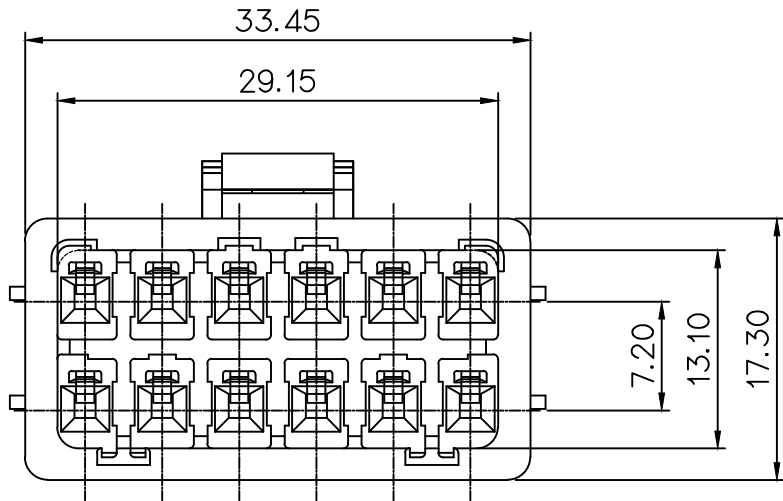


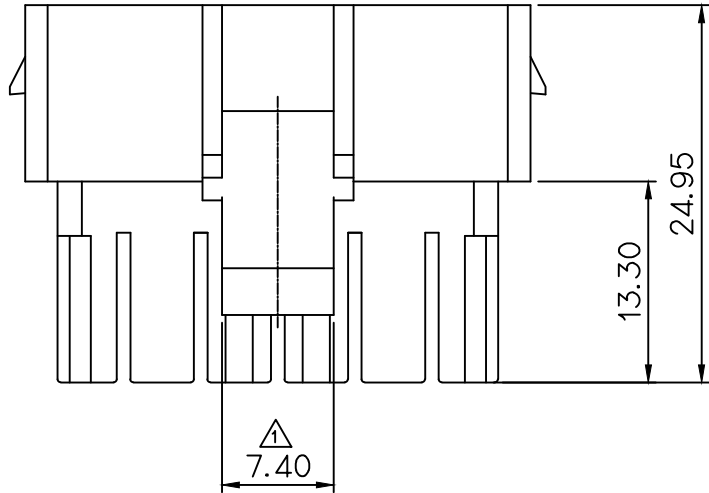

주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 R/HOLDER : MG634697(방수),8(비방수)
적용 TERMINAL : ST731169,70,71,72
적용 I/SEAL :MG684872
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG633240
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3.APPLICABLE R/HOLDER : MG634697(WP),8(NWP)
APPLICABLE TERMINAL : ST731169,70,71,72
APPLICABLE I/SEAL : MG684872
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE

						MATERIAL PA66(V0)		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH NAT.			
						WIRE RANGE		CLASS 050 WP	
						INSULATION		TYPE	
△	설계사양변경(S100242)의거 도면변경	KSH				*10.09.28			
△	설계사양변경(S100056)의거 도면변경	KSH				*10.03.26			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG614695
DR. KSH. 09. 05.07		CHK.					PART NAME		
CHK.		APP.					WP(050) 12F HOUSING		

ISSUE MARK	
------------	--