

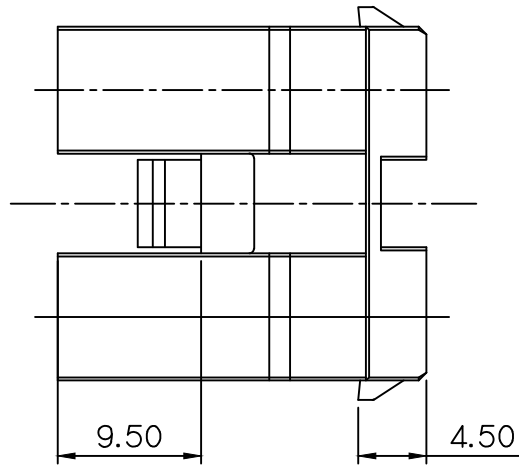
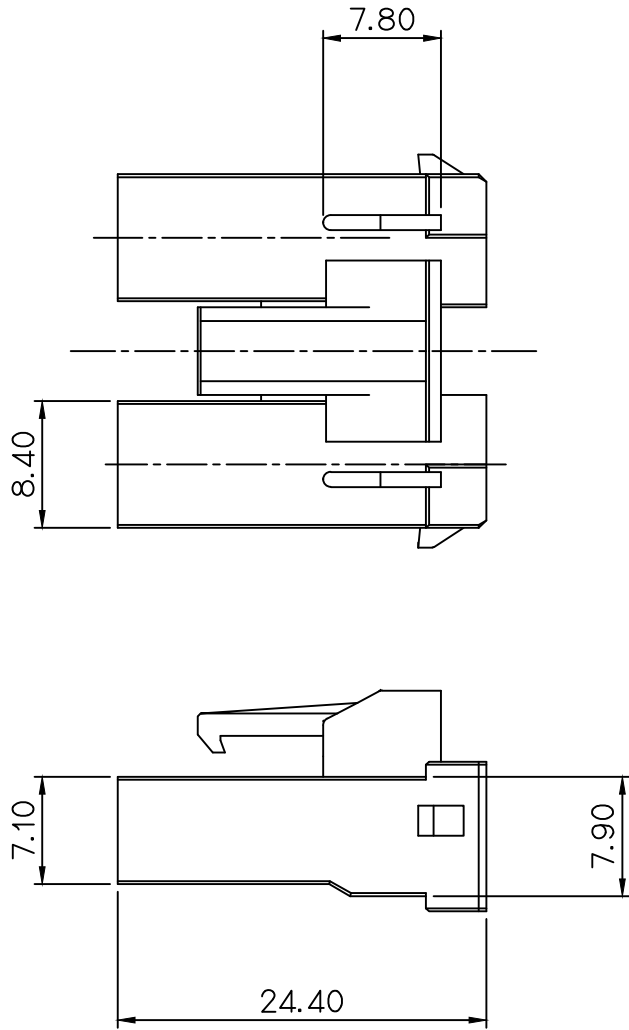


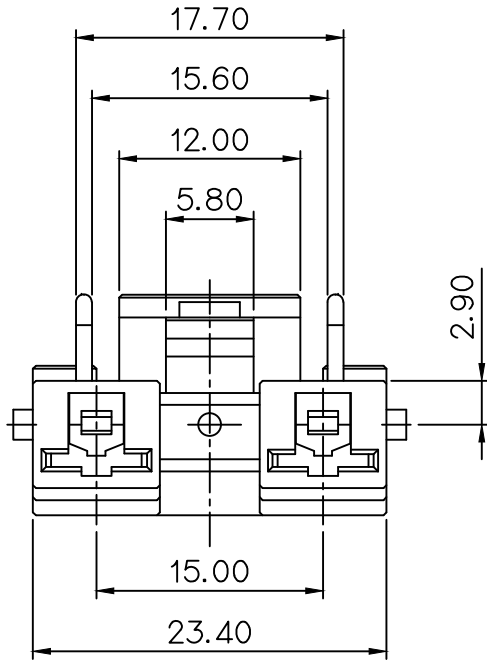


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731235, ST731236
APPLICABLE R/HOLDER : MG635013
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISO VIEW

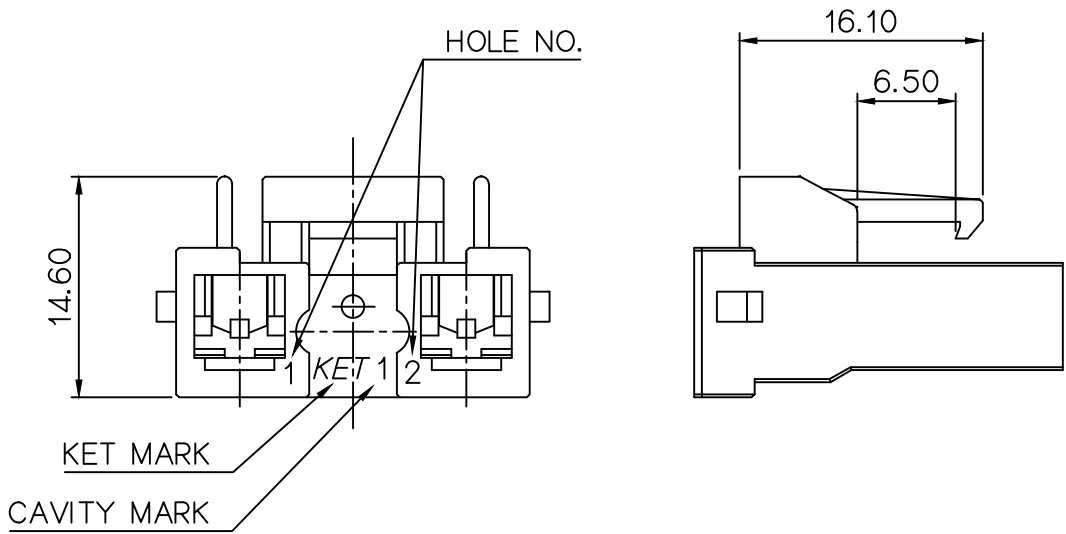

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST731235, ST731236
적용 R/HOLDER : MG635013
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK	
------------	--

						MATERIAL PA66(VO)		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH NATURAL			
						WIRE RANGE		CLASS	187 SERIES
						INSULATION		TYPE	DOUBLE LOCK
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG615012
DR. 			CHK. 				PART NAME		
CHK.			APP. 				.187 PLUG HOUSING 2P(DL Type)		