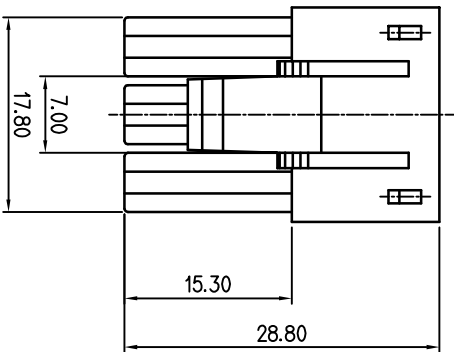



GENERAL TOLERANCE (HOUSING)						USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG625040,41
- APPLICABLE R/HOLDER : MG635043
- APPLICABLE TERMINAL : ST731245,46,47
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE

주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 HOUSING : MG625040,41
- 적용 R/HOLDER : MG635043
- 적용 TERMINAL : ST731245,46,47
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISOMETRIC VIEW

ISSUE MARK

						MATERIAL		TE5006F		KEI KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH		BLUE					
								WIRE RANGE		CLASS		NEW 3220	
								INSULATION		TYPE			
LTR		REVISION RECORD		DR		CHK		APP.		DATE		PART NO.	
DR		KSH '10.03.25		CHK		NEW		'10.03.25				MG615042-2	
CHK				APP.		ywh		'10.03.25		PART NAME		NEW 3220 3P FEMALE HOUSING	