


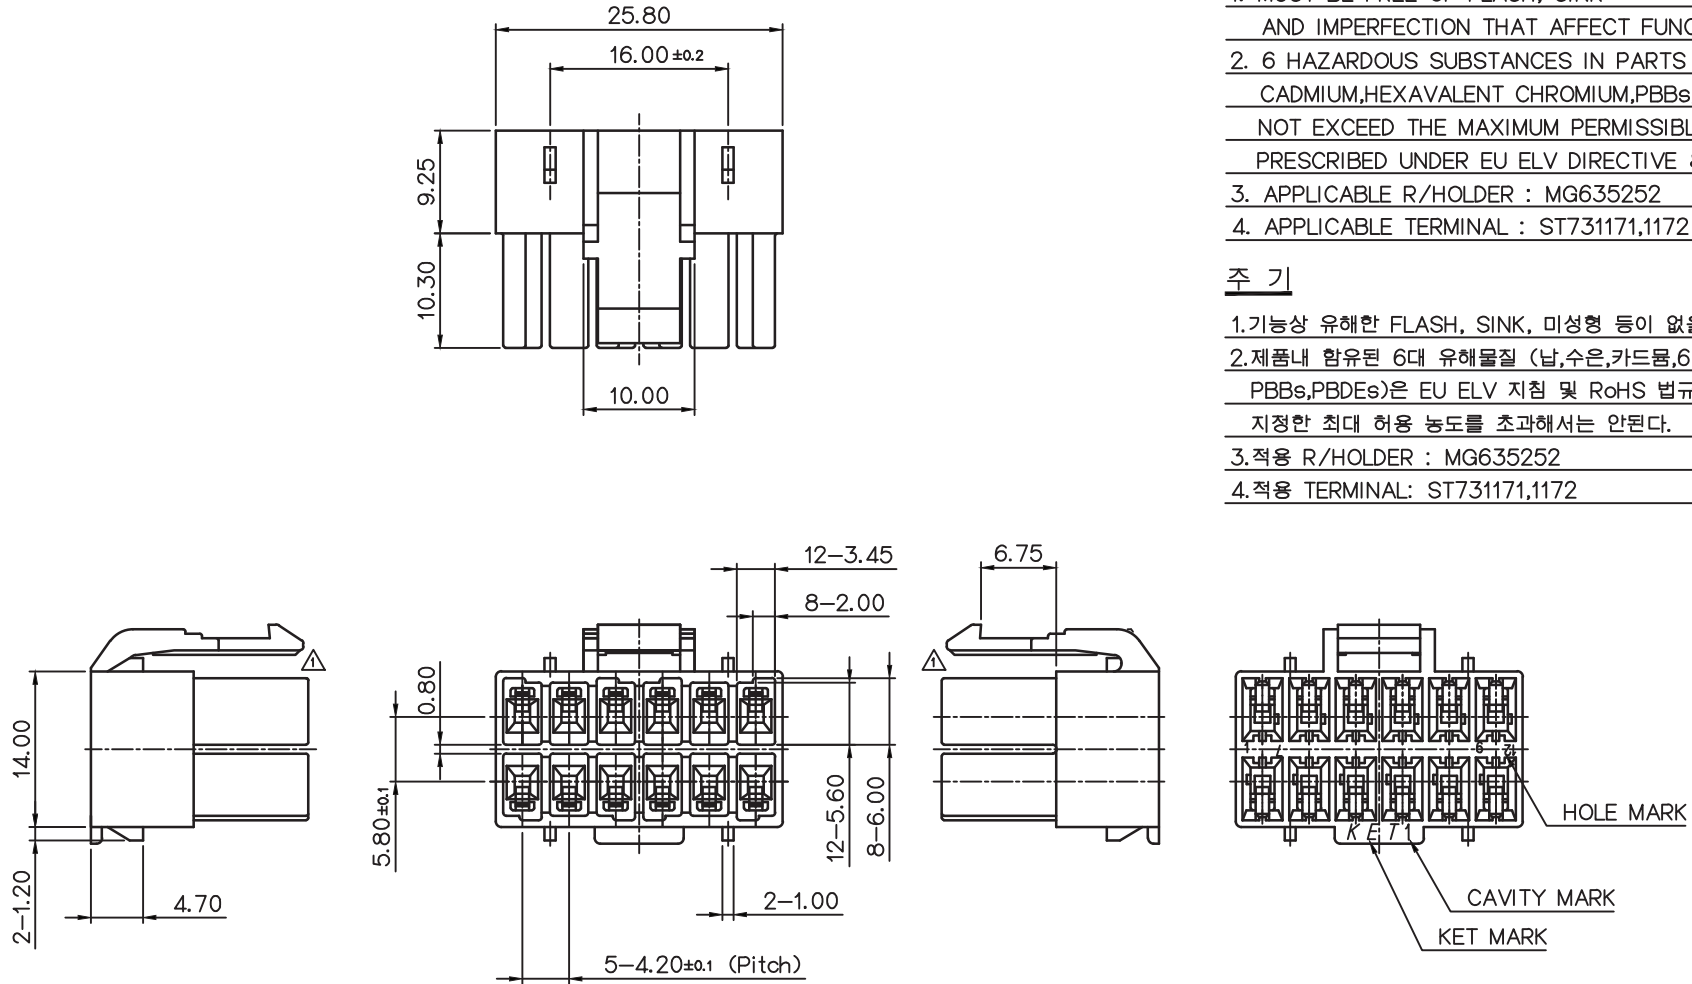

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG635252
- APPLICABLE TERMINAL : ST731171, 1172

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : MG635252
- 적용 TERMINAL: ST731171, 1172

ISSUE MARK

				MATERIAL	PA66(V0)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	NATURAL	
				WIRE RANGE		CLASS NEW 050
				INSULATION		TYPE
△	ECO-1111-011 근거 도면 수정	PSH	KSH	BUC	'11.11.01	PART NO. MG615249
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	
DR.	PSH. 10.10.12	CHK.				PART NAME NEW 050 12F HOUSING
CHK.	KSH. 10.10.12	APP.	BUC.	10.10.12		
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1