
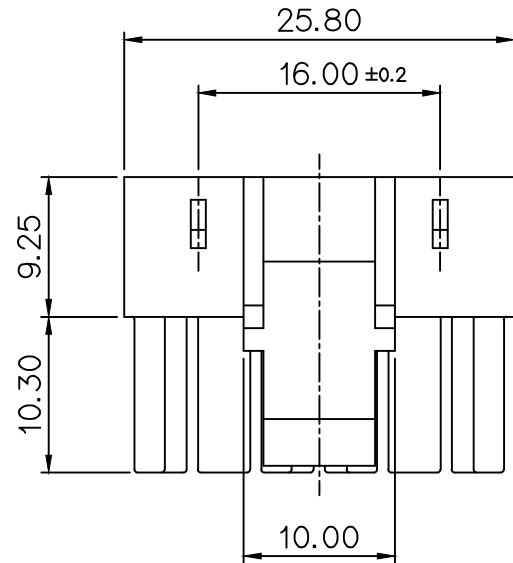
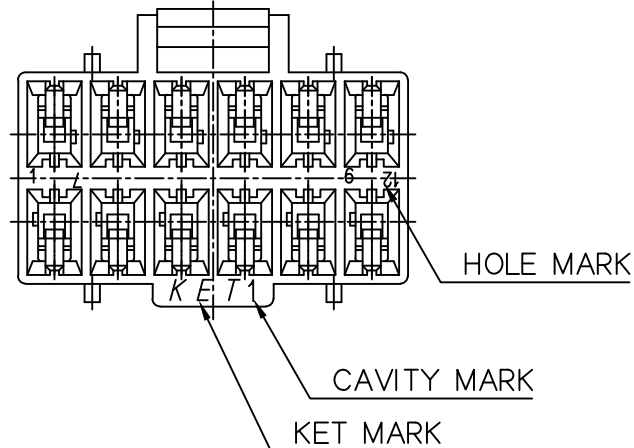
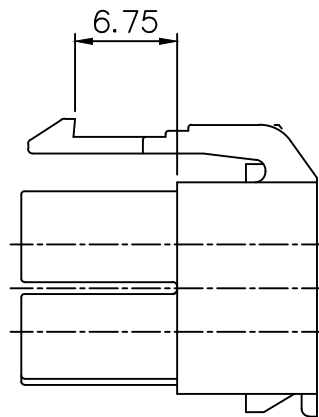
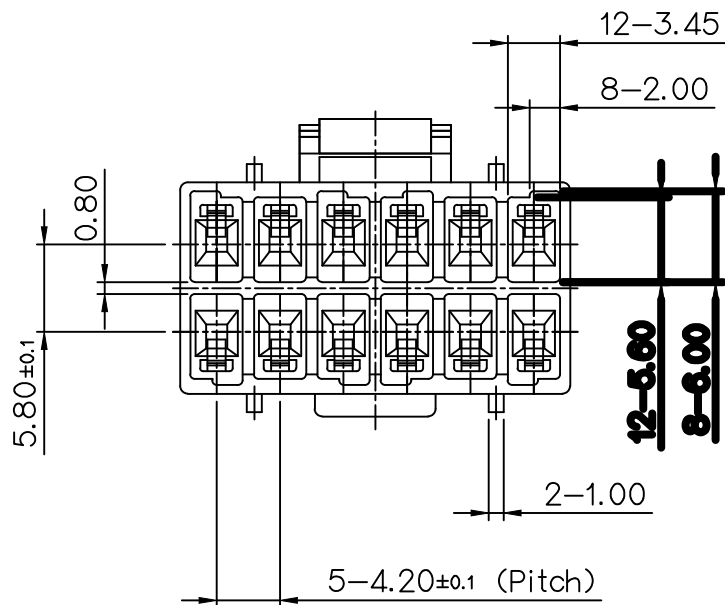


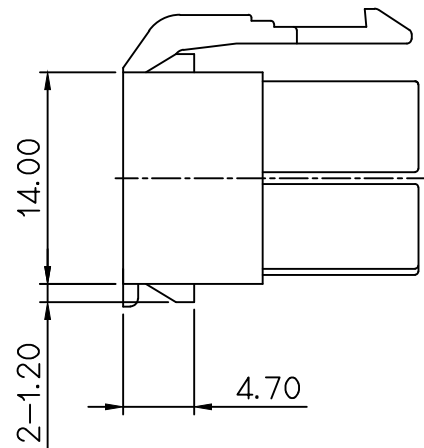

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
3. APPLICABLE R/HOLDER : MG635252
4. APPLICABLE TERMINAL : ST731171, 1172

주 기

1. 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
2. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. 적용 R/HOLDER : MG635252
4. 적용 TERMINAL: ST731171, 1172

ISSUE MARK

						MATERIAL	PA66(V0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	NATURAL		
						WIRE RANGE	CLASS		NEW 050
						INSULATION	TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
	PSH. 10.10.12						SEE TABLE	2/1	MG615249
DR.							PART NAME		
CHK.	KSH. 10.10.12		APP.	BUC. 10.10.12			NEW 050 12F HOUSING		