
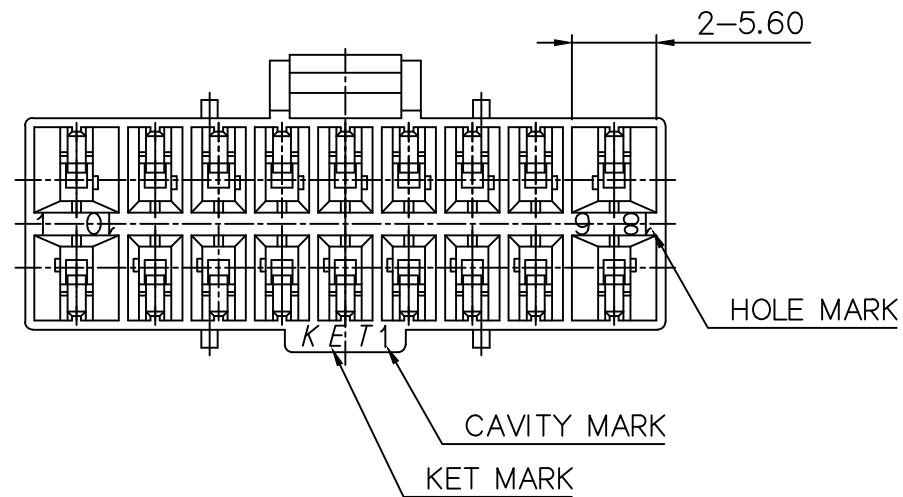
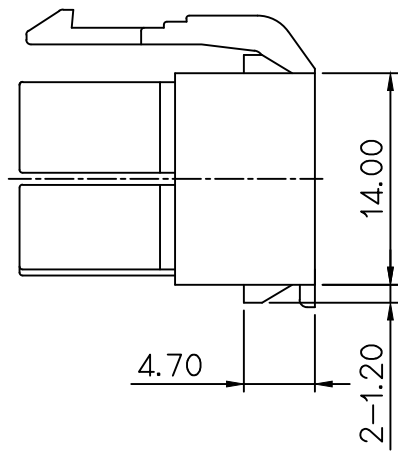


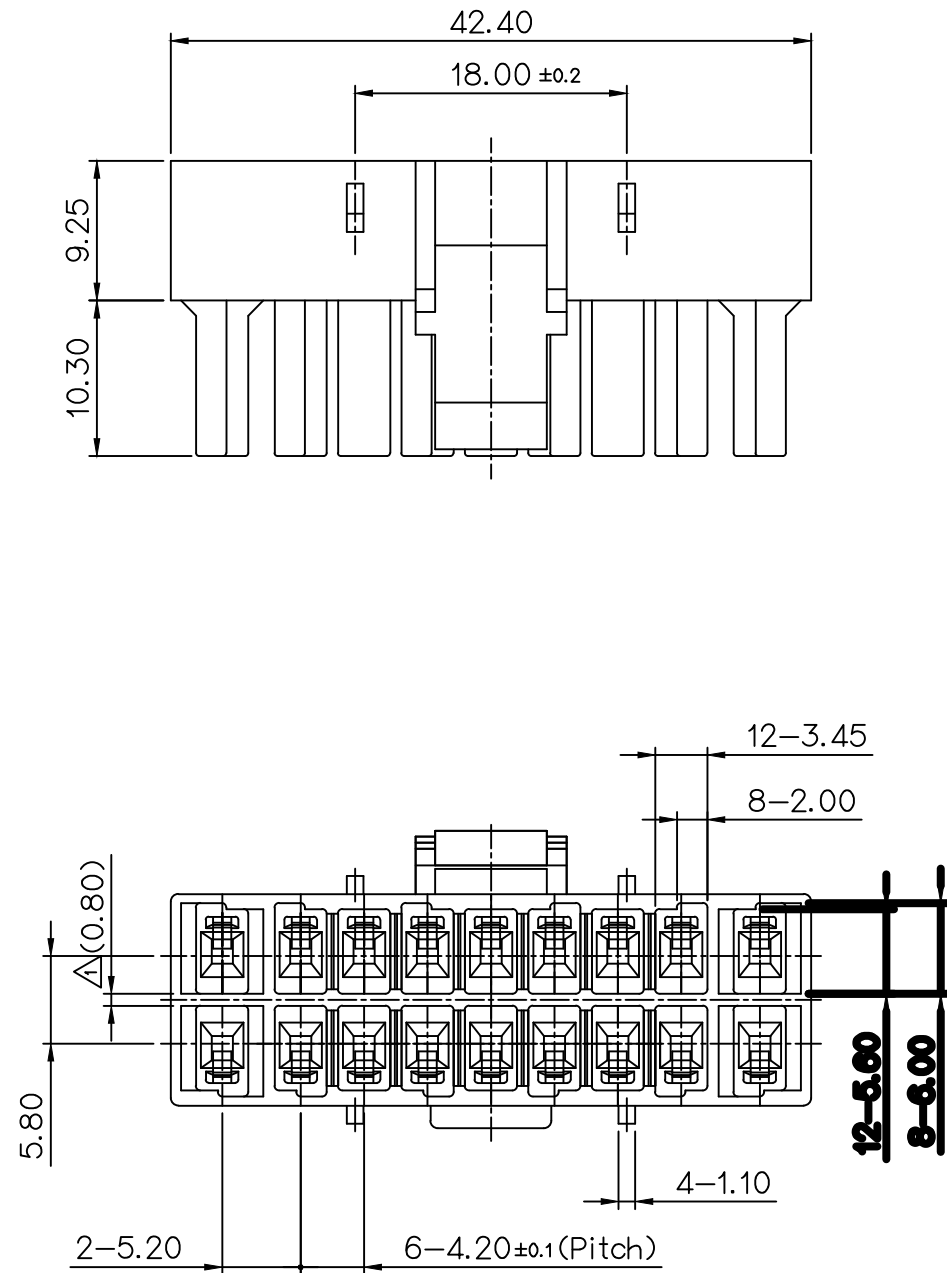

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG635256
- APPLICABLE TERMINAL : ST731171, 1172, BOTH SIDE-731303

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : MG635256
- 적용 TERMINAL: ST731171, 1172, 양쪽 끝-731303

ISSUE MARK

					MATERIAL	△PET+PC(GWIT)		
					FINISH	NATURAL		
					WIRE RANGE			
					INSULATION			
△	ECO-1210-019	근거	도면수정					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	PSH. 10.12.07	CHK.				SEE TABLE	2/1	MG615253
CHK.	KSH.	APP.	BUC.			PART NAME		
								NEW 050 18F HOUSING

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS NEW 050

TYPE