

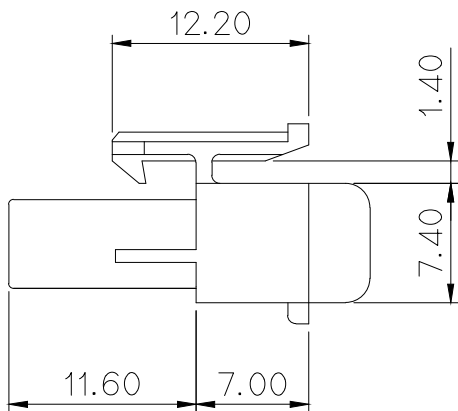
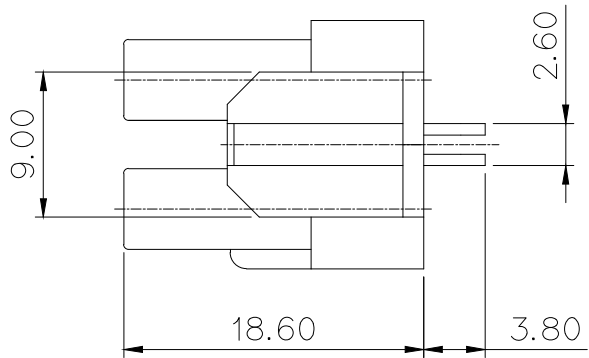


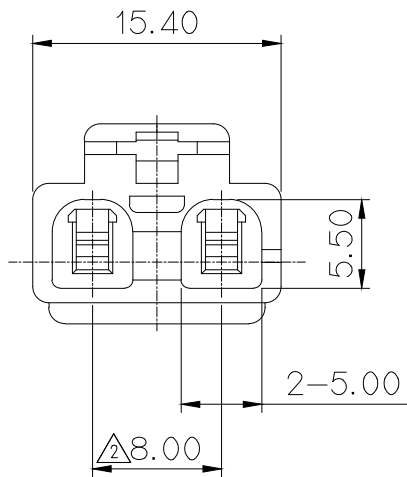

NOTE


1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE HOUSING : MG645470
APPICABLE TERMINAL : ST730459-3/460-3/461-3/462-3
- 3.10 HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED
THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

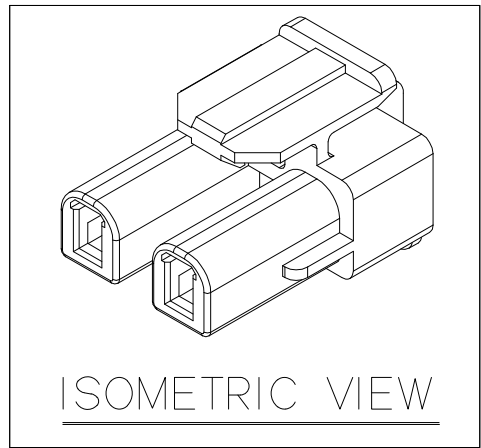

ISOMETRIC VIEW

HOLE NO.

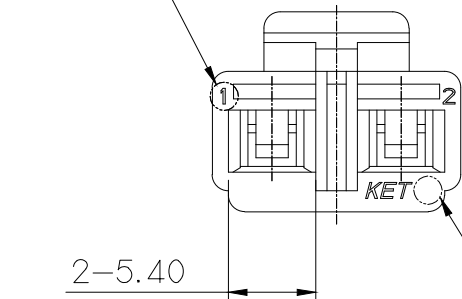

CAVITY NO.

NO.	COLOR
0	NATURAL
1	RED
* 2	BLUE
3	YELLOW
* 5	BLACK

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 하우징 : MG645470
적용 터미널 : ST730459-3/460-3/461-3/462-3
- 3.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및
RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2020-12-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL PBT (V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS	
	ECO-2008-004	근거 도면 수정	YHJ PSH	KSH	'20.08.03	INSULATION		TYPE PCB
	ECO-1802-223	근거 도면 수정	PJM KSH	BUC	'18.02.22	PART NO.		MG615468
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR.		PJM '11. 01. 05	CHK.		KSH	1/19	PART NAME	
CHK.			APP.		BUC	1/20	1806 PCB 2F HSG_P=8mm	