
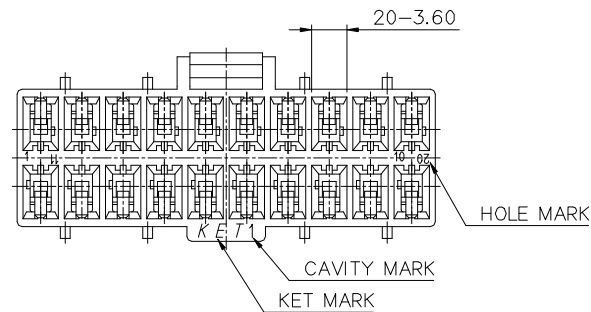



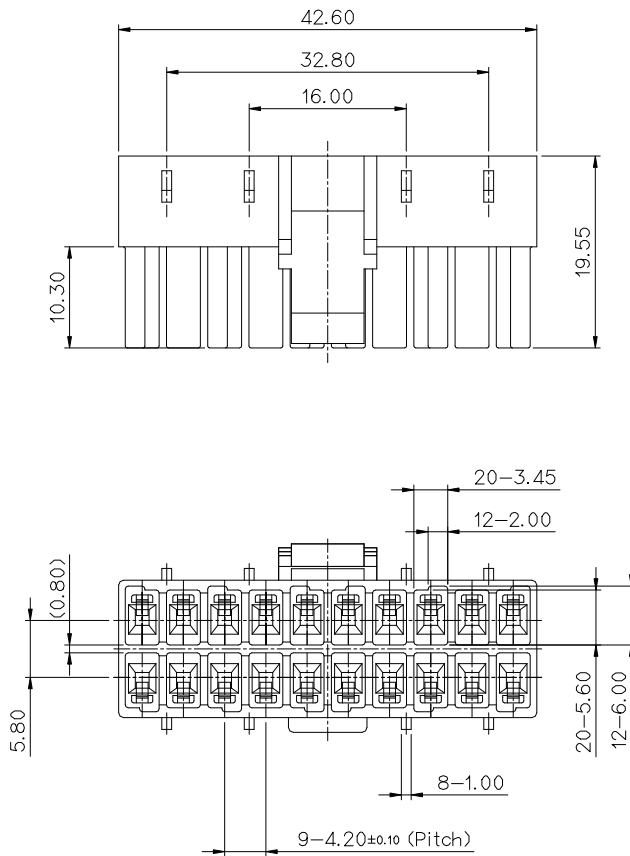

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG635620
- APPLICABLE TERMINAL : ST731171, 1172

~S. ~!_J

- ~!_J^'3|P^*!|5 ~R_2~F_~^3'K| \$ FLASH, SINK, ~_5^*%5^3'15 ^J'3|P~, _5 ^,%|2^R'3|C ^!'%|3.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : MG635620
- 적용 TERMINAL: ST731171, 1172

ISSUE MARK

						MATERIAL		PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.				
						FINISH		NATURAL					
						WIRE RANGE		CLASS		NEW 050			
						INSULATION		TYPE					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	2/1	PART NO.	MG615562
DR.	PSH. 12.10.15		CHK.			PART NAME							
CHK.	KSH.		APP.			BUC.			NEW 050 20F HOUSING				

