
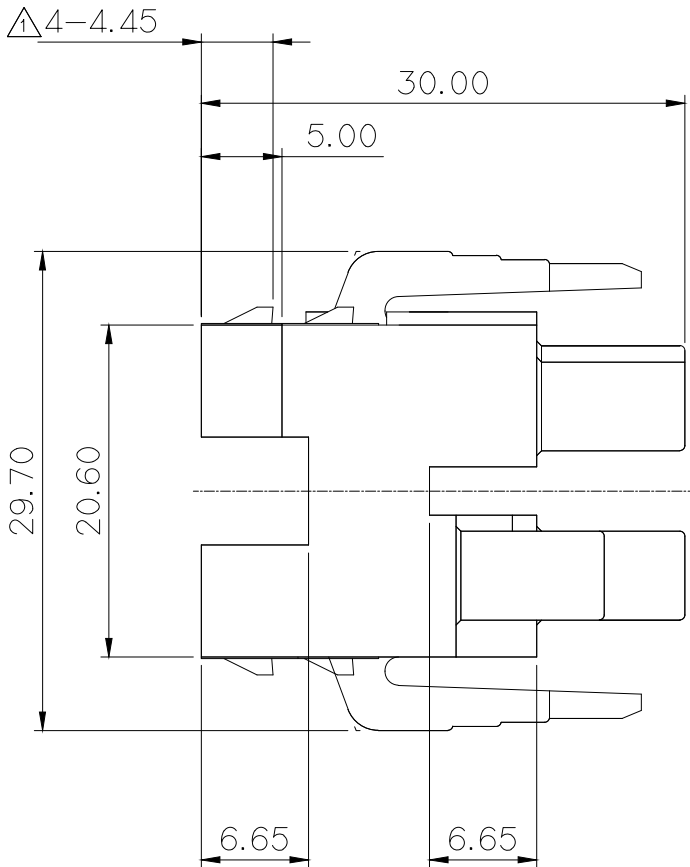
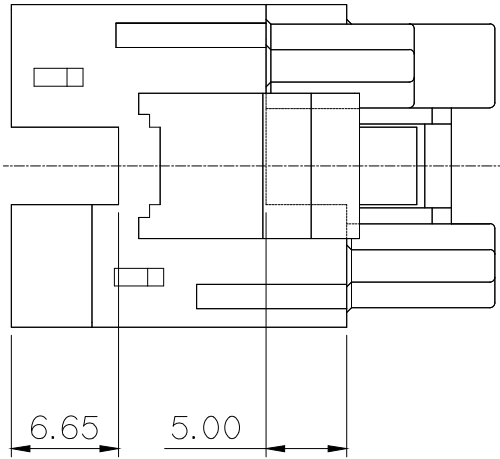
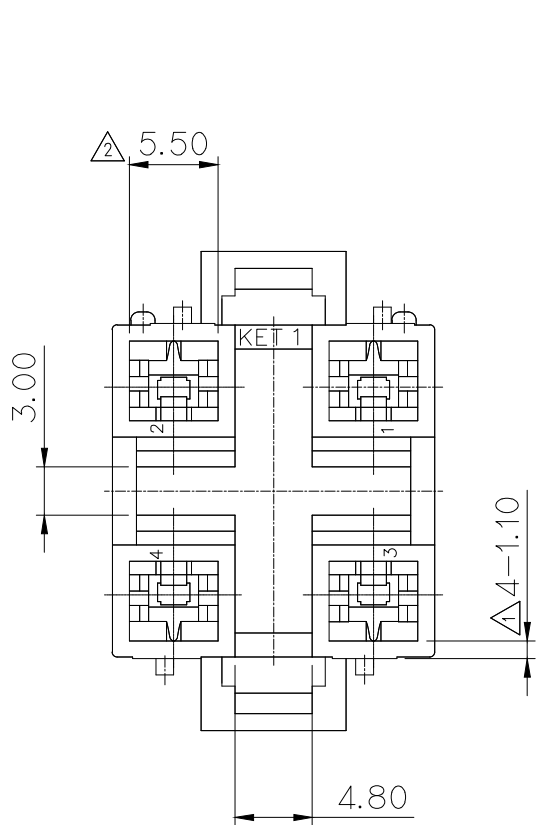


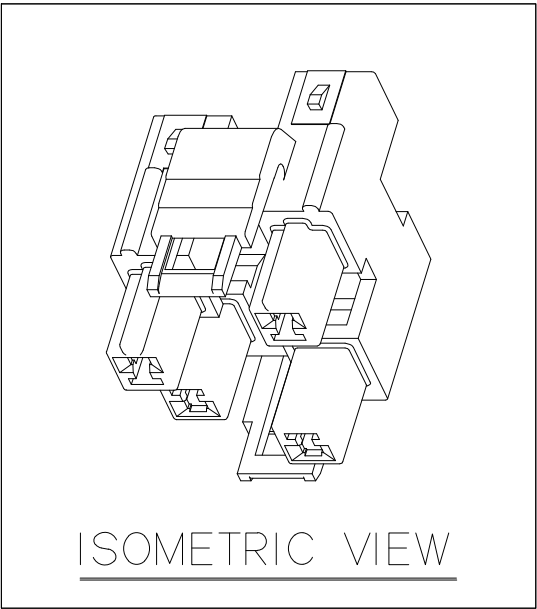


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730694,695,696,697,872-3
적용 HOUSING : MG625434
- 적용 REAR HOLDER : MG635703
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730694,695,696,872-3
APPLICABLE HOUSING : MG625434
- APPLICABLE REAR HOLDER : MG635703
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

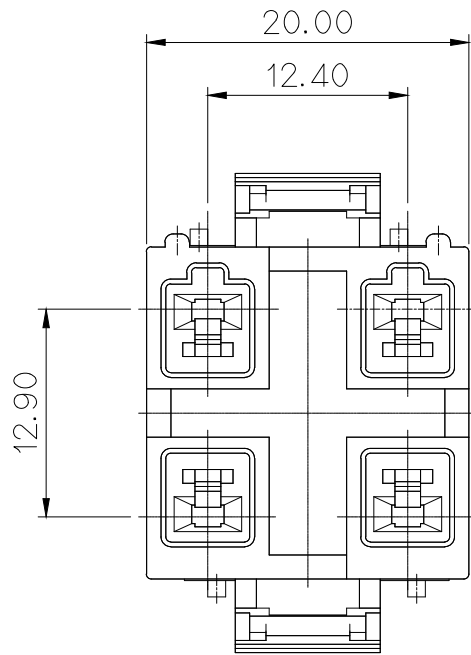

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL	PET+PC(GWIT)		KOREA ELECTRIC	
					FINISH	NATURAL		TERMINAL CO., LTD.	
					WIRE RANGE			CLASS	1806 D/L
					INSULATION			TYPE	
②	ECO-1405-070 큰거 도면 수정	SMG	KSH	✓	'14.05.17				
①	ECO-1403-217 큰거 도면 수정	SMG	KSH	✓	'14.03.28				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
	DR. KSH '2012.12.28	CHK.				SEE TABLE	2/1	MG615564	
CHK.		APP.	✓		'12.12.28	PART NAME			
						1806 D/L 4F HS'G(T.P)			