
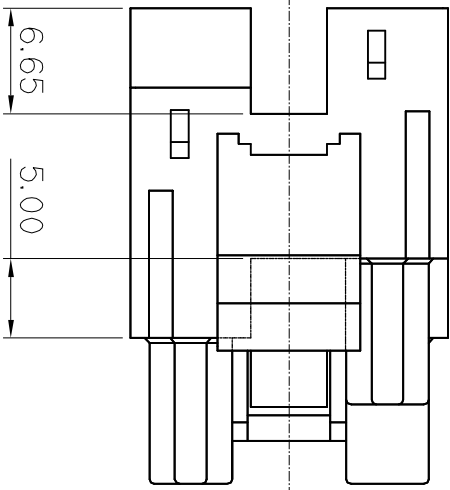


This diagram shows an exploded view of a three-part plastic connector assembly. The components are: a top housing with a central rectangular opening and side tabs; a middle housing with a central rectangular protrusion and side tabs; and a bottom housing with a central rectangular opening and side tabs. The components are shown in a perspective view, with the middle housing positioned between the top and bottom housings, illustrating how they fit together.

ISOMETRIC VIEW

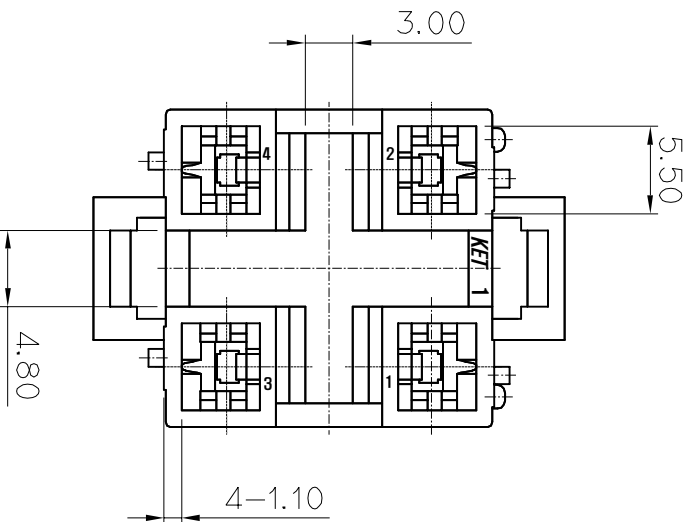

구분	COLOR
-1	RED
-2	BLUE
-3	YELLOW
-5	BLACK

USED ON

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

1. 기공장 우해한 BURR 및 WELDLINE등이 없을것.

1. 기공장 우해한 BURR 및 WELDLINE등이 없을것.

2. 적용 TERMINAL : ST730694,695,696,697,872-3

작품 HOUSING : MG625434L

키오 REAR HOLDER : MG635703L

3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

1. MUST BE FREE OF FLASH, SINK

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730694,695,696,872-3



APPLICABLE HOUSING : MG625434L

APPLICABLE REAR HOLDER : MG635703L

3. 6 HAZARDOUS SUBSTANCES IN PARIS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL

NOT EXCEED THE MAXIMUM PERMISSIBLE

CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

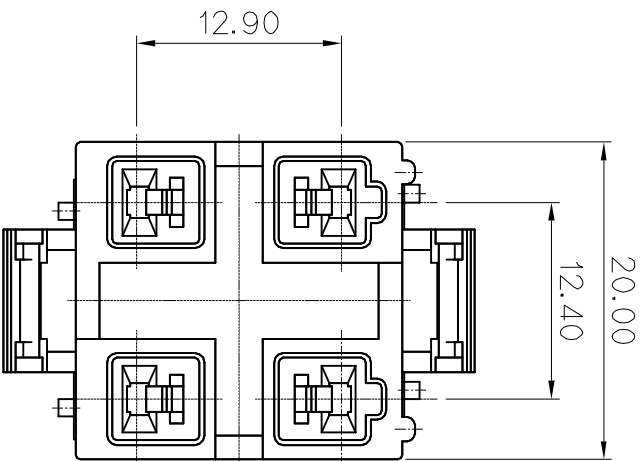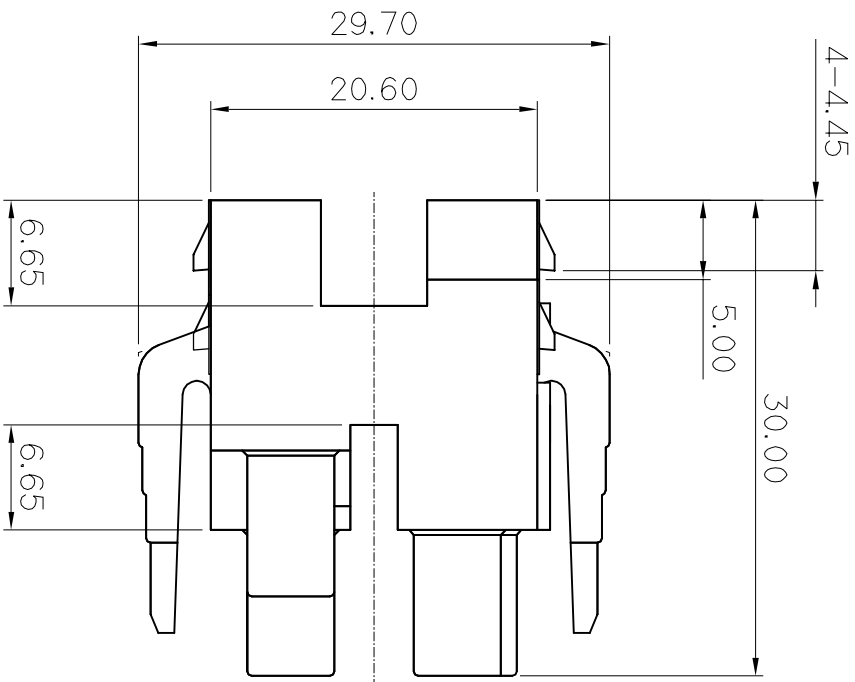

					MATERIAL	PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	NATURAL		
					WIRE RANGE	CLASS		1806 D/L
					INSULATION	TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR.	SMC 15.05.21	CHK.	PSH 15.05.21					
CHK.	KSH 15.05.21	APP.	BUC 15.05.21					
				TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.		
PART NAME				SEE TABLE	2/1	MG615564L		
1806 D/L 4F HS'G(T.P)								