

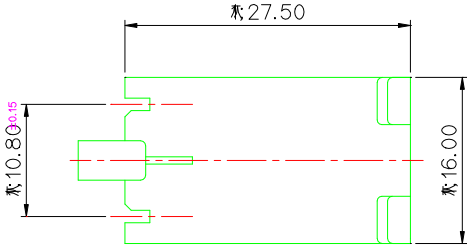

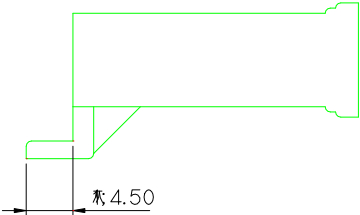


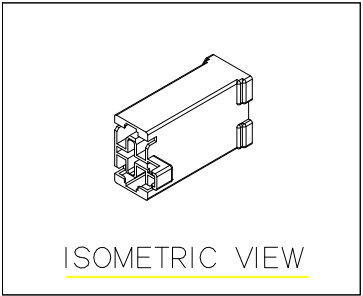

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 2.적용 터미널 : ST730570-3/571-3/572-3 (P-LOCK TYPE)
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPICABLE TERMINAL : ST730570-3/571-3/572-3 (P-LOCK TYPE)
- 3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

APPROVED

2015-06-24

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL PBT (V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH BLUE			
						WIRE RANGE			
						CLASS REGULATOR			
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615570
DR. PSH '13.04.23			CHK. KSH '13.04.23			PART NAME			
CHK.			APP. BUC '13.04.23			GulimChe 000 129 49;REGULATOR 2P HOUSING B TYPE			

