
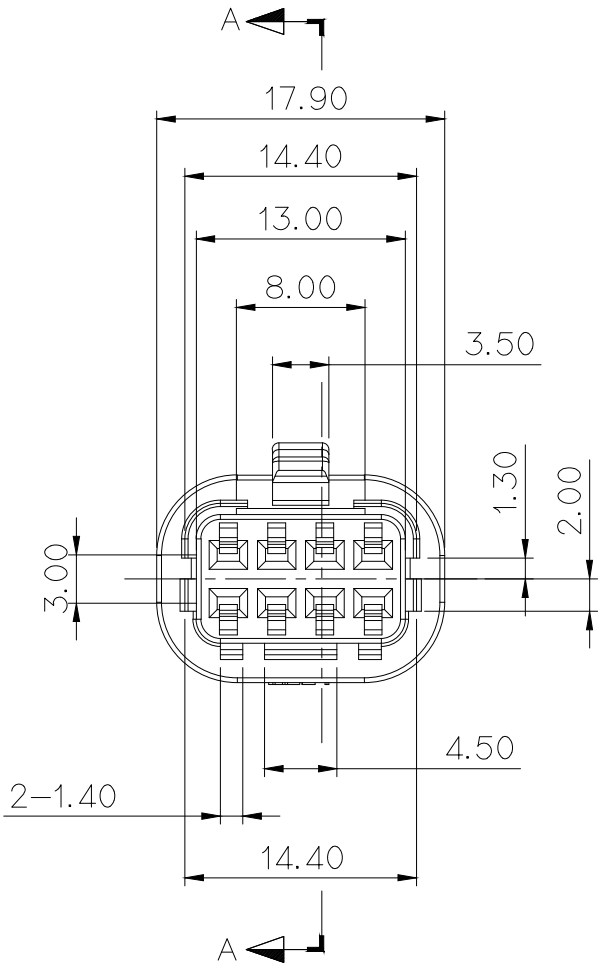
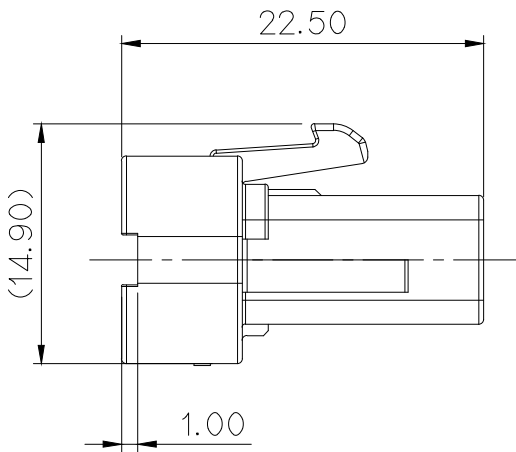
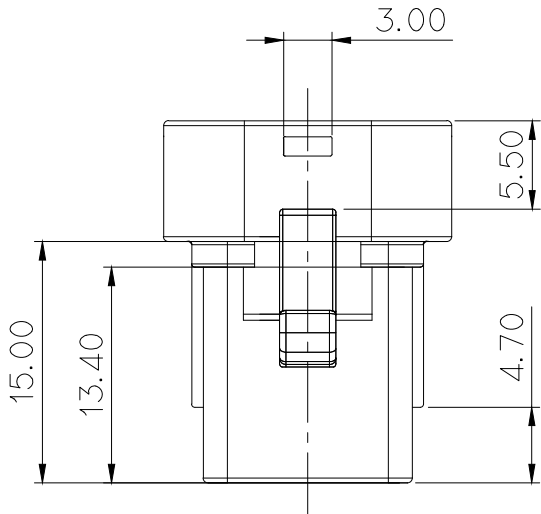
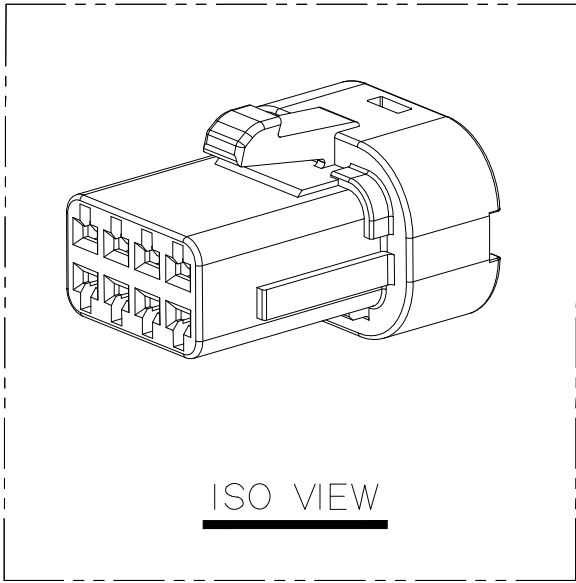
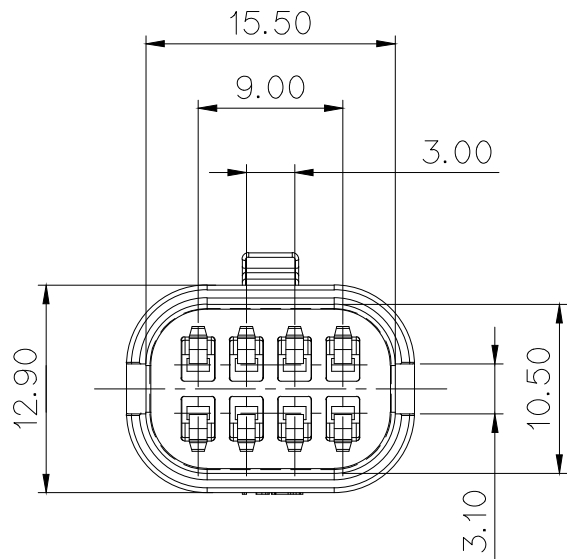


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	* P B T:	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730517
APPLICABLE REAR HOLDER :MG635691
APPLICABLE SEAL(8P) :MG685449, MG685470
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

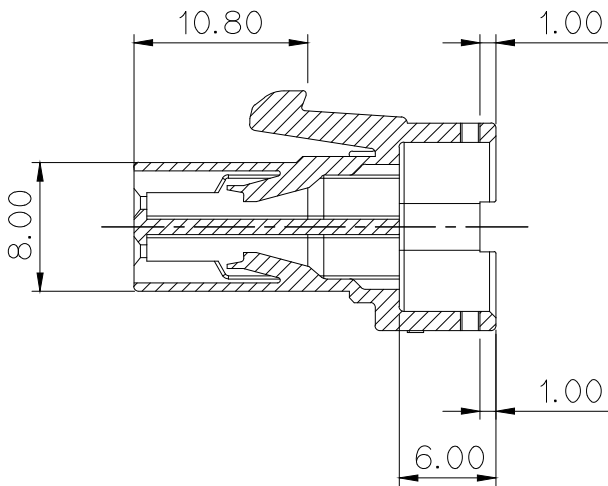

주 기


- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730517
적용 REAR HOLDER : MG635691
적용 SEAL(8P) : MG685449, MG685470
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	SEE TABLE				
						WIRE RANGE	0.3 ~ 0.5		CLASS SP		
						INSULATION			TYPE		
	검사성적서 합격에 따른 도면 재작성	JCM			15.06.29	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615591			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE						
DR.	WDH. 2014.02.17	CHK.							PART NAME SP WP 8F HOUSING		
CHK.	KMH. 2014.02.17	APP. CWK 2014.02.17									