

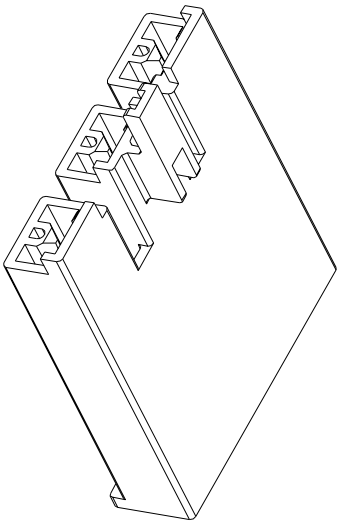
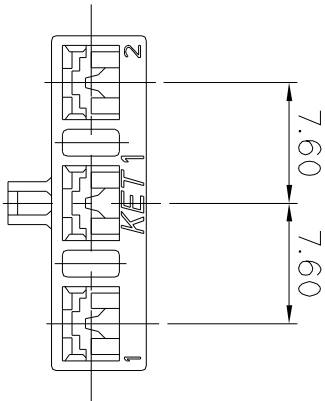


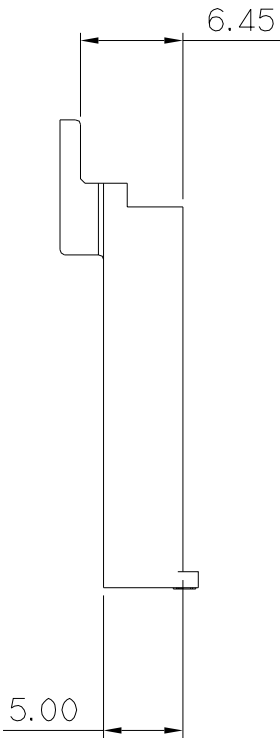

ISOMETRIC VIEW

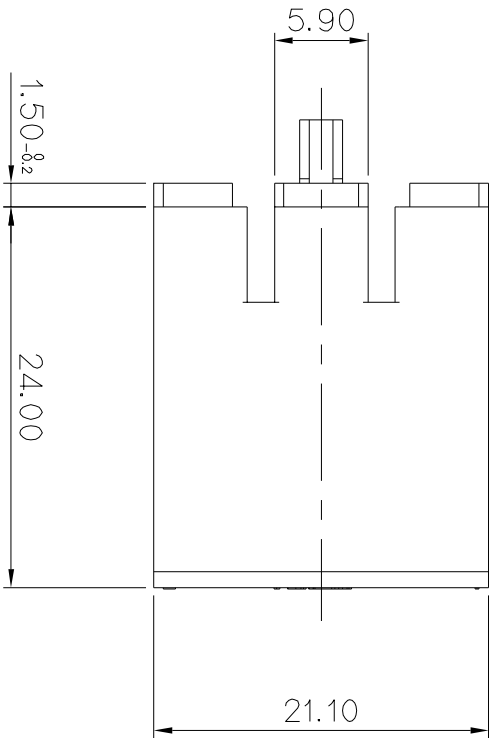

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST731177-3 / ST731217-3
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST731177-3 / ST731217-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

				MATERIAL	PAG6(V0)	 KEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE	CLASS	
				INSULATION	TYPE	
					110 P-LOCK	
LTR	REVISION RECORD	DR. / CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	SMG. '15. 02. 06	CHK. PSH. '15. 02. 06			SEE TABLE	SCALE 2 / 1
CHK.	KSH. '15. 02. 06	APP. PSH. '15. 02. 06			PART NAME	
						110 P-LOCK 3P HOUSING