

Δ GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. MUST BE FREE OF BURR, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730245-2

3. HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,

Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT

EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED

UNDER EU ELV DIRECTIVE & RoHS REGULATION

1. 기능상 우해한 BURR 및 WELDLINE등이 없으것.


2. 적용 테미널 : ST730245-2

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs,

ROHS 법규에서 지정된 최대 허용농도를

웃고 계시는 안 됩니다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

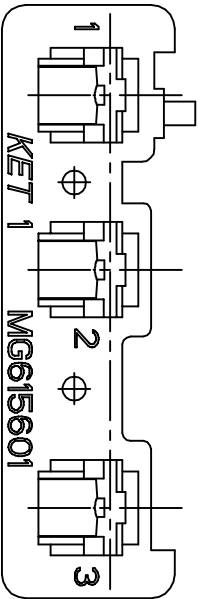

ISSUE MARK	
------------	--

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
					INSULATION		
					CLASS		
					TYPE 187		
△	ECC-1501-0429가 도면 제작성	SMG	KSH	BUC	'15.01.06		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR.	SMG '14.12.04	CHK.		PART NAME			
CHK.	KSH '14.12.04	APP.		BUC '14.12.04			
					187 3P HS'G		