


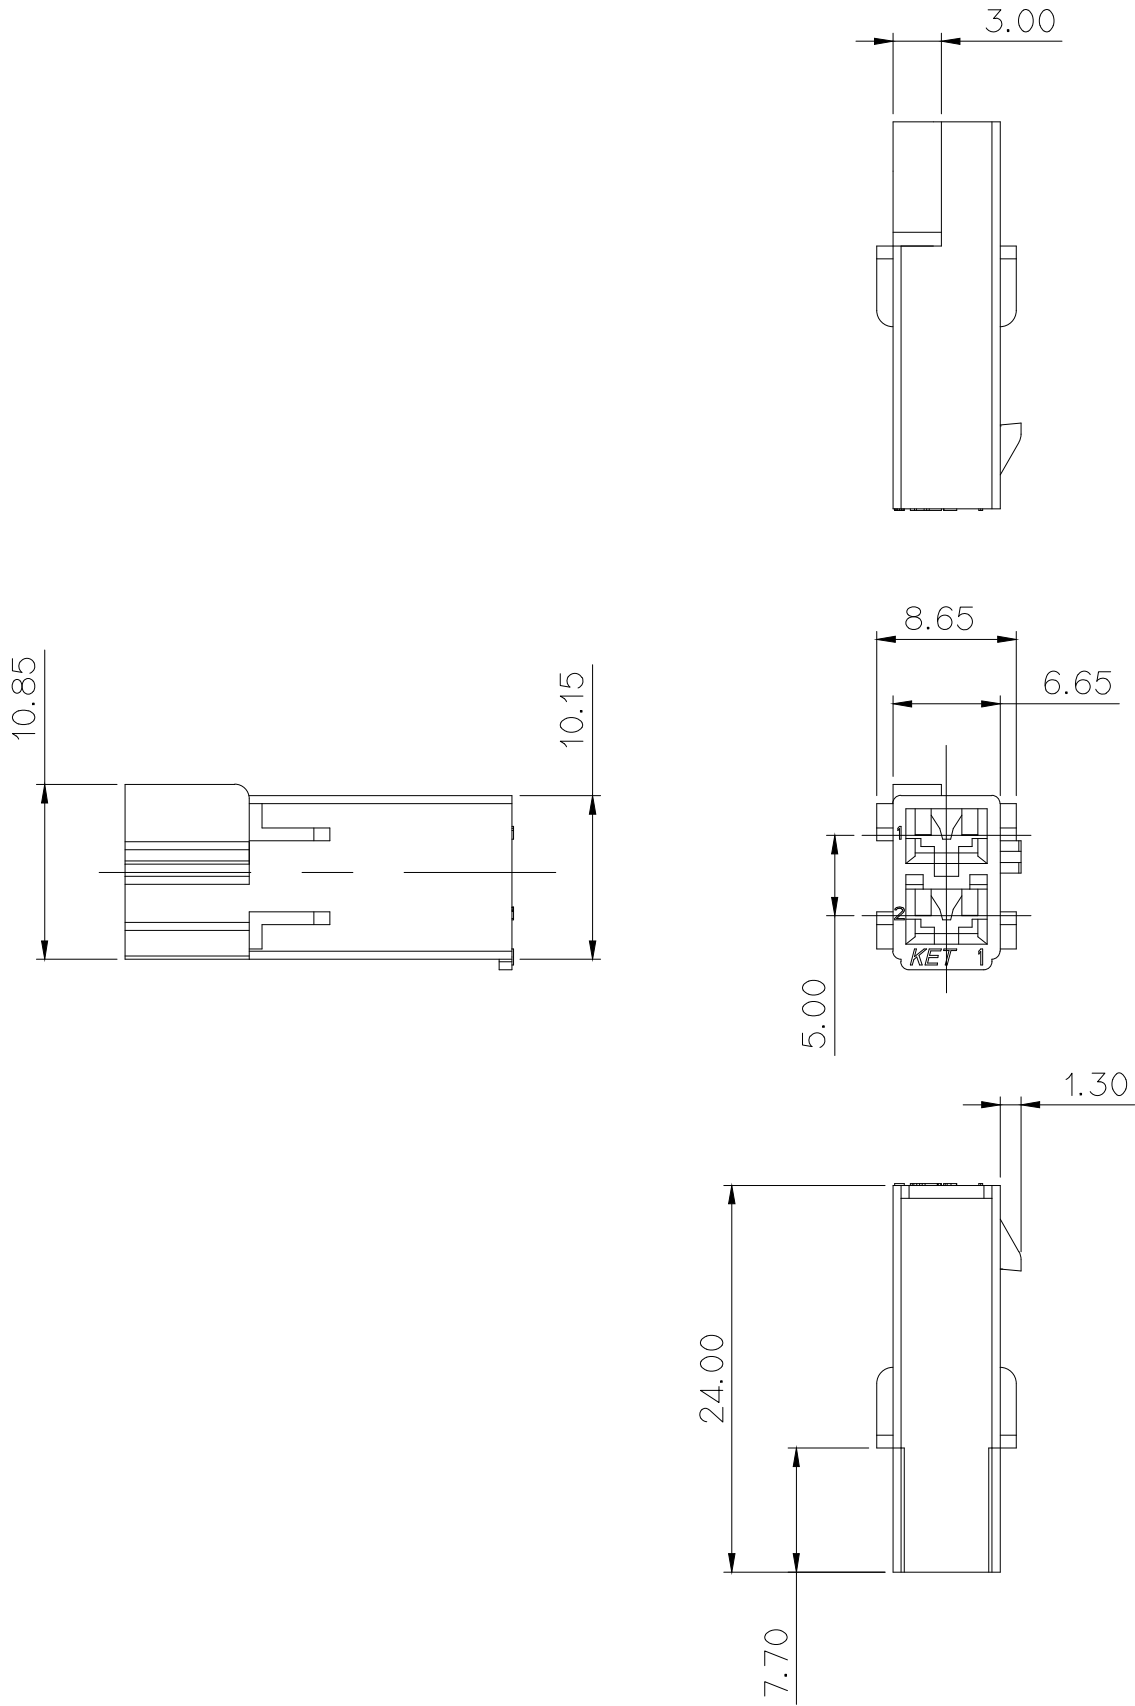

PART NO. *표시는 색상 표기 임.

*

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK

△	ECO-1711-249 근거 도면 재작성	LCM	KSH	BUC	'17.11.20
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	SMG '15.10.30	CHK.	PSH '15.10.30		
CHK.	KSH '15.10.30	APP.	BUC '15.10.30		

MATERIAL	PET+PC(G.W.I.T)		KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE			
INSULATION		CLASS	
		TYPE	110 P-LOCK
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
PART NAME	110 P-LOCK 2F HOUSING		

주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 R/HOLDER : M635756-2/-5
적용 TERMINAL : S731177-3, ST731217-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE R/HOLDER : MG635756-2/-5
APPLICABLE TERMINAL : ST731177-3, ST731217-3
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE

APPROVED
2019-11-05
KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK