
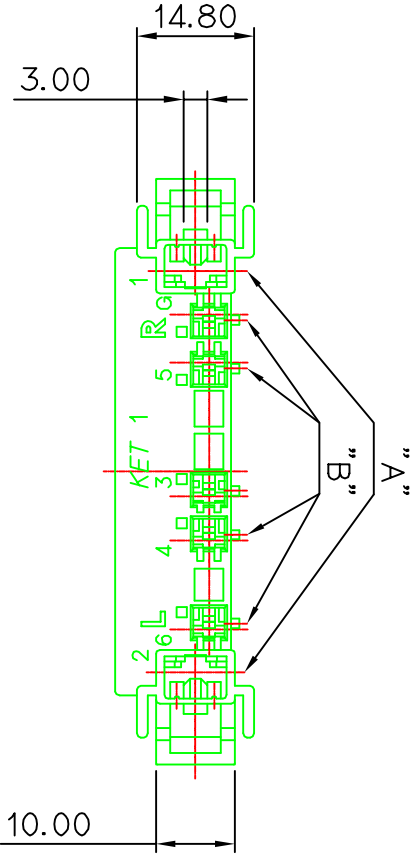
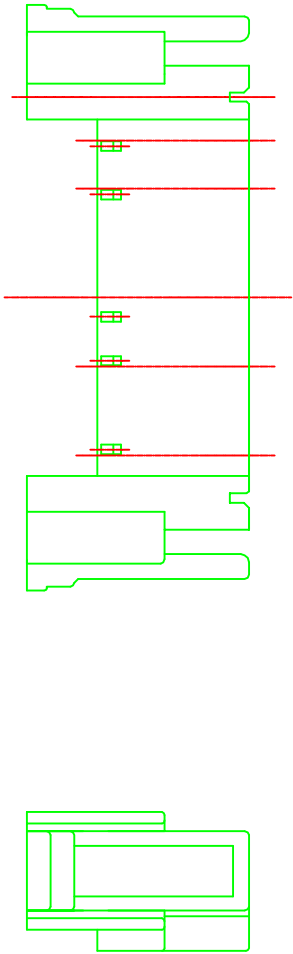
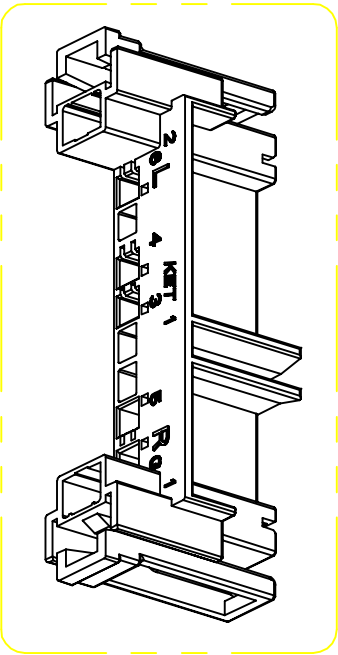


(DIMENSIONS IN MM)

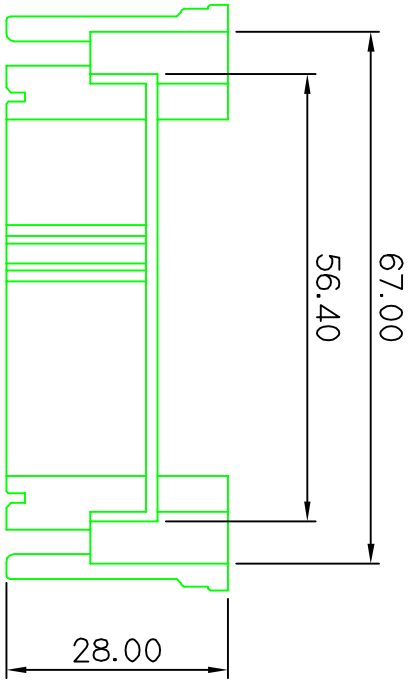

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MATING HOLE "A", "B"
* A(250 P-LOCK) – MG635572-2
* B(125 SERIES) – MG635573-2(3,4,6), MG635574-1(5,G)
- APPLICABLE TERMINAL : MATING HOLE "A", "B"
* A(250 P-LOCK) – ST730570, ST730571, ST730572
* B(125 SERIES) – ST731342

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : 적용 홀 "A", "B"
* A(250 P-LOCK) : MG635572-2
* B(125 SERIES) : MG635573-2(3,4,6), MG635574-1(5,G)
- 적용 TERMINAL : 적용 홀 "A", "B"
* A(250 P-LOCK) : ST730570, ST730571, ST730572
* B(125 SERIES) : ST731342

ISSUE MARK

				MATERIAL		PET+PC(GW1T)	 KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH		NATURAL		
				WIRE RANGE				
				INSULATION			CLASS	
							TYPE	
LTR				REVISION RECORD				
				DR.	CHK.	APP.	DATE	
DR.				PSH.	15.11.03	CHK.	KSH.	
CHK.				APP.	BUC.			
				TOLERANCE AS NOTED		SEE TABLE	SCALE 1/1	PART NO. MG615604
				PART NAME		MOTOR MULTI 7F HOUSING		