
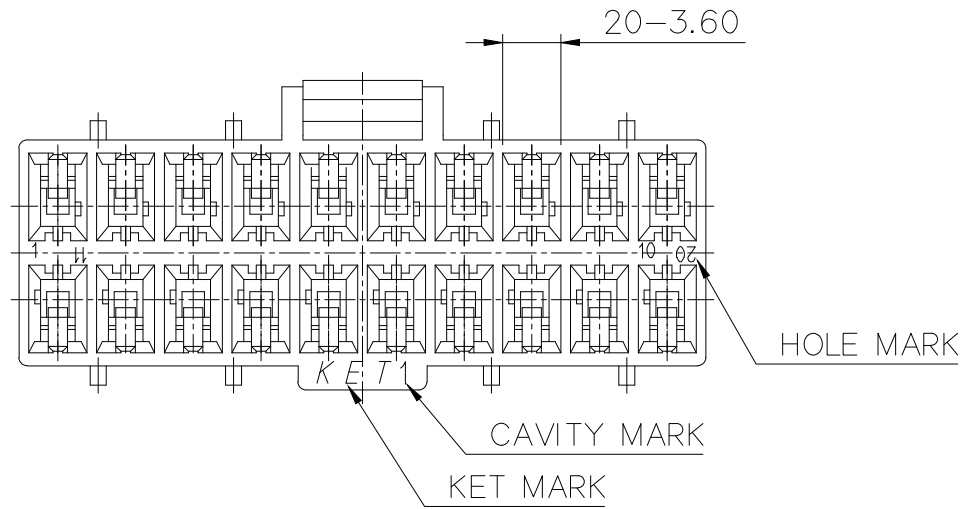
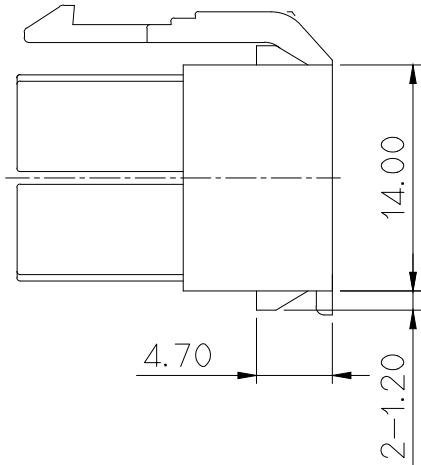


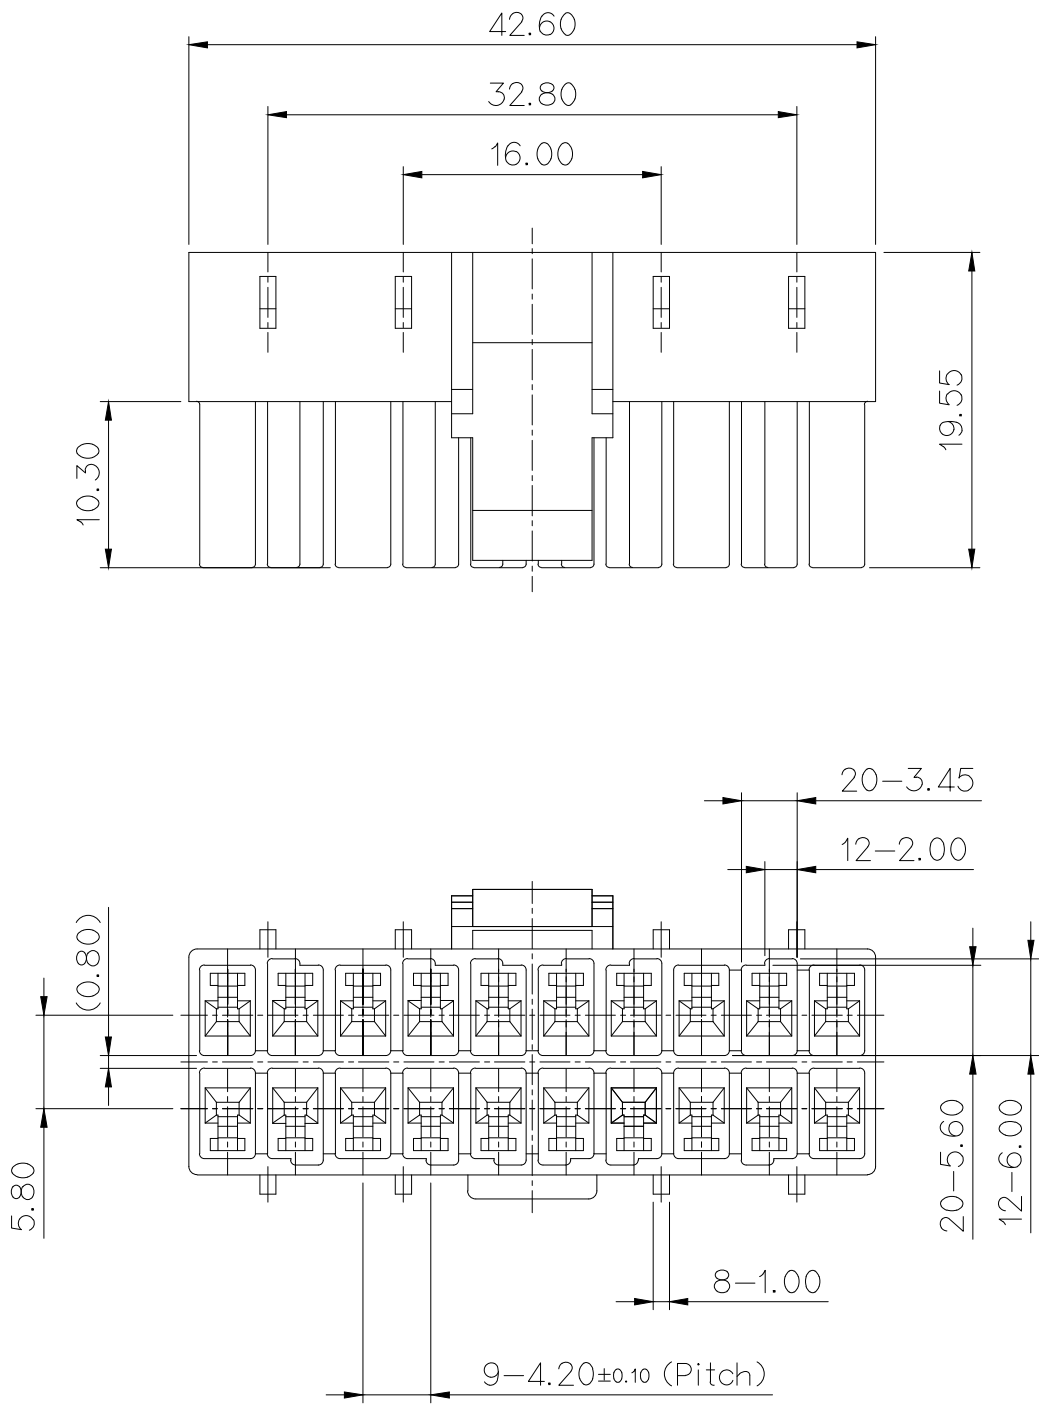

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MG635620
- APPLICABLE TERMINAL : ST731171,1172

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : MG635620
- 적용 TERMINAL: ST731171,1172

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL		PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.				
					FINISH		NATURAL					
					WIRE RANGE		CLASS		NEW 050			
					INSULATION		TYPE					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1	PART NO.	MG615636-120
DR.			PSH. 17.08.21			CHK.			KSH.			
CHK.						APP.			BUC.			
PART NAME												NEW 050 20F HOUSING