
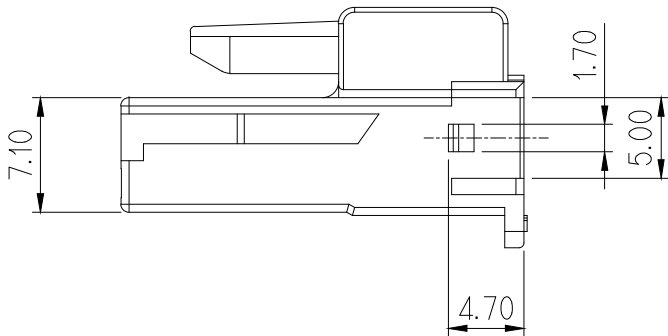
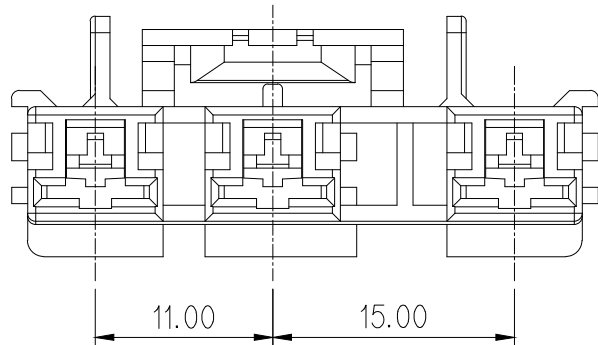


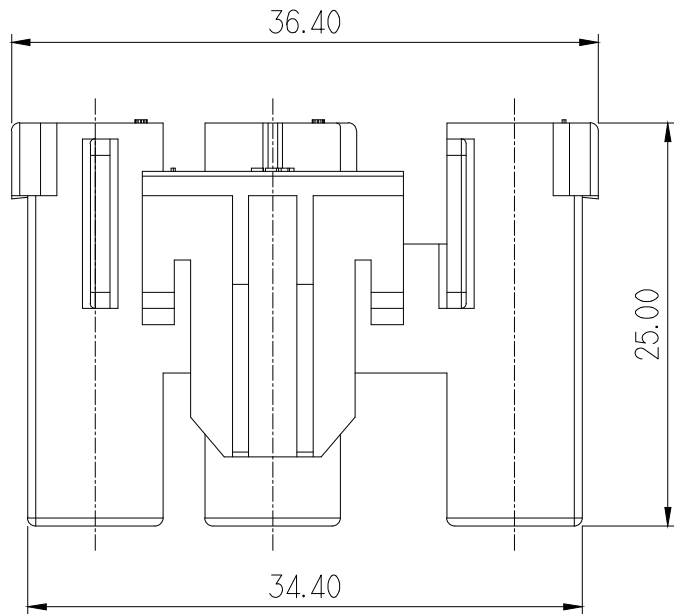



NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731235-3S
APPLICABLE R/H : MG635907-201
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE 없을 것.
- 적용 TERMINAL : ST731235-3S
적용 R/H : MG635907-201
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

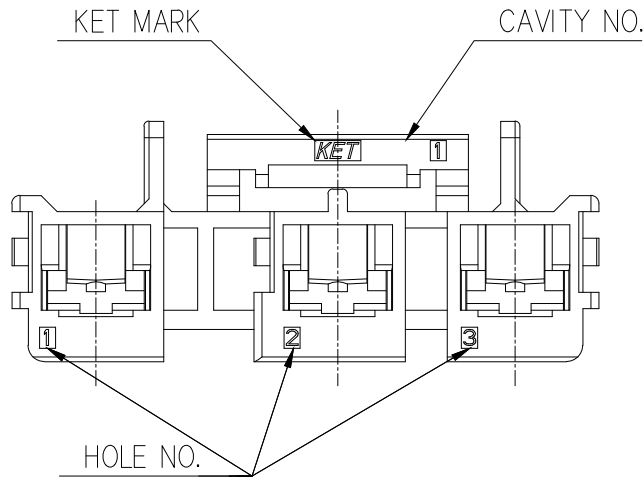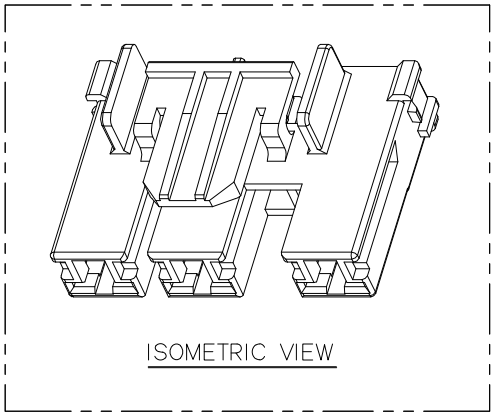

NO.	MATERIAL	COLOR
0	PET+PC (GWIT)	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK

APPROVED

2021-03-31

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

					MATERIAL SEE TABLE		IKIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE				
					INSULATION				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
							SEE TABLE	2/1	MG615650-003
DR.	LYS. '18.10.18		CHK.	PSH. '18.10.18					
CHK.	KSH. '18.10.18		APP.	BUC. '18.10.18		187 3F HOUSING			