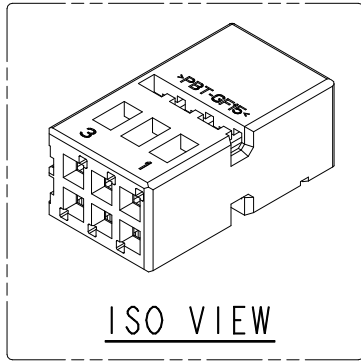


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL(AK 064): 928999-1, 963715-1
3. 적용 COVER: MG635917
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL(AK 064): 928999-1, 963715-1
3. APPLICABLE COVER: MG635917
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT GF15	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

ISSUE MARK

					MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.				
					FINISH	SEE TABLE						
					WIRE RANGE	-						
					INSULATION	-	CLASS	AK 064				
	Drawing Transfer (Overlayment-0Mass Production) ECO-2000-001 Basic Drawing Confiting			KJC	AJH	CMS	20.03.03	TYPE	non-waterproof			
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 3/1	PART NO.	MG615666
DR. YSS 2018.12.11				CHK.				PART-NAME AK 064 6F HOUSING				
CHK. AJH 2018.12.11				APP. CMS 2018.12.11								