



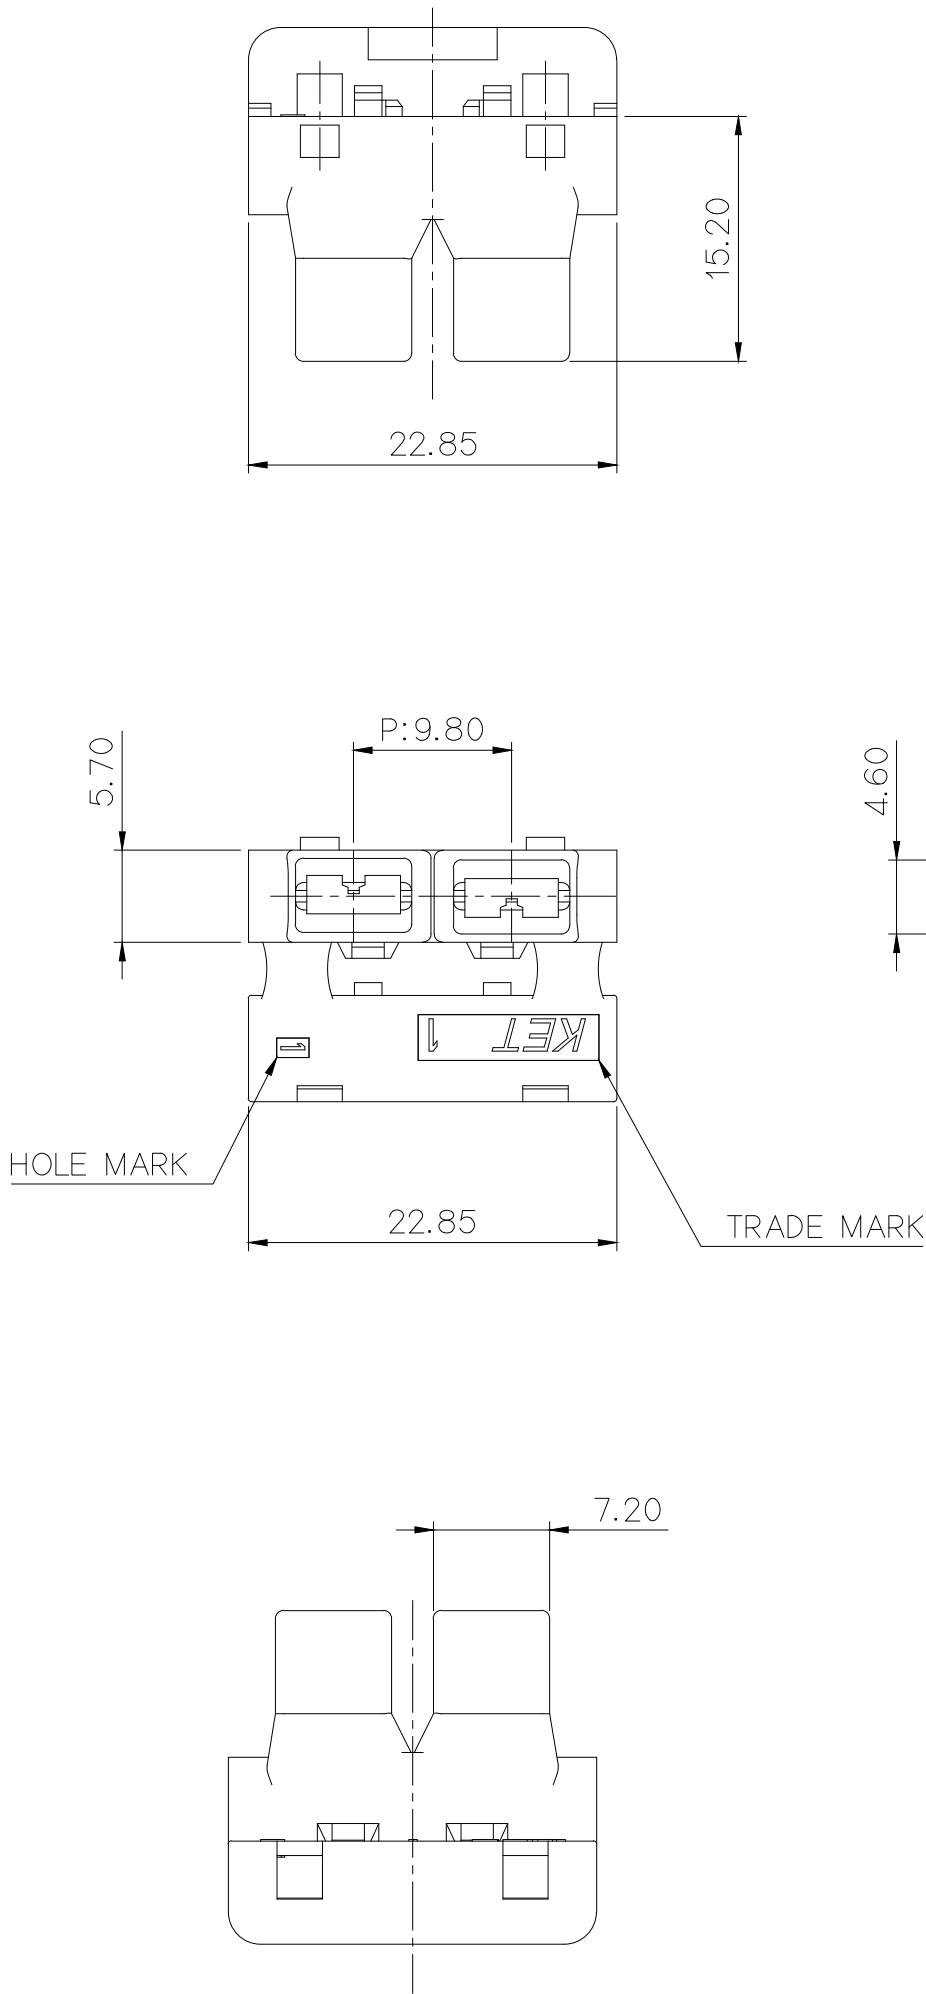

Cover체결 참고치수

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100 VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

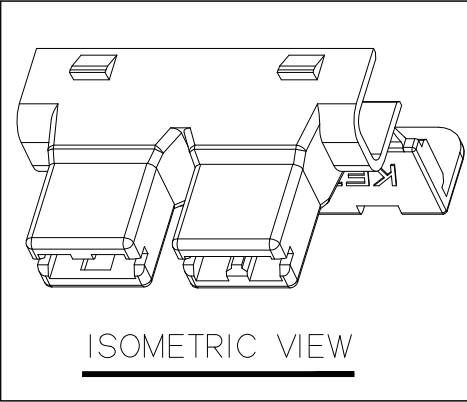

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST731079-3, ST731507-3S
3. 10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM EU ELV DIRECTIVE & RoHS REGULATION & RoHS REGULATION

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 TERMIANL : ST731079-3, ST731507-3S
3. 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과하지 말 것.

- PART NO. * 표시는 색상 표시 임.

NO.	COLOR
* 0	NATURAL
1	RED
* 2	BLUE
3	YELLOW
4	GRAY
* 5	BLACK
* 6	GREEN

APPROVED

2021-03-31

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE			CLASS	
					INSULATION			TYPE 187 P—LOCK	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615687—*02
DR.	SMG '20.04.01		CHK.PSH '20.04.01		PART NAME				
CHK.	KSH '20.04.01		APP.KHG '20.04.01		187 P—LOCK 2F FLAG HOUSING(VA				