
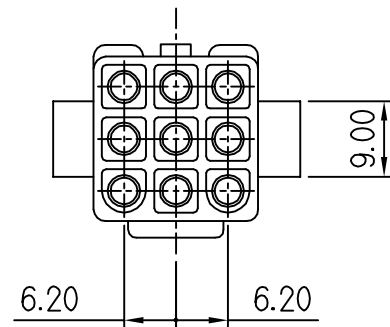
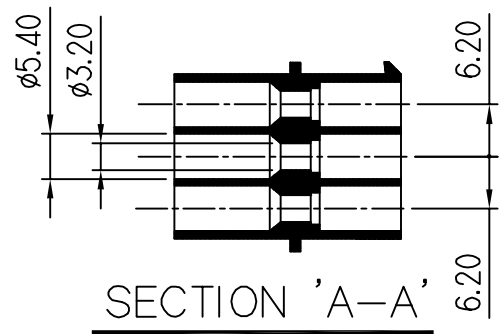


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

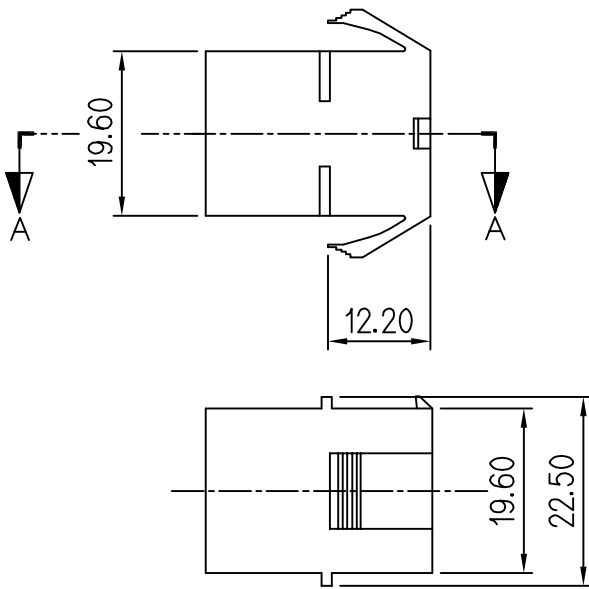



주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST750207-3, 750208-3, 750330-3
3. 적용 HOUSING: MG610018
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST750207-3, 750208-3, 750330-3
3. APPLICABLE HOUSING: MG610018
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL		NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		NATURAL	
③	설계사양변경(S110128)근거 도면 재작성				'11.04.28	WIRE RANGE		CLASS	
②	명칭변경(φ2.0 PIN 9P HSG)				'85.11.29	INSULATION		TYPE	
①	제번 변경 (GP880929)				'85.09.13				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	 85 2/10		CHK.				SEE TABLE	1/1	① MG620017
CHK.			APP.				PART NAME		
						② φ2.0 REC HOUSING 9P			