
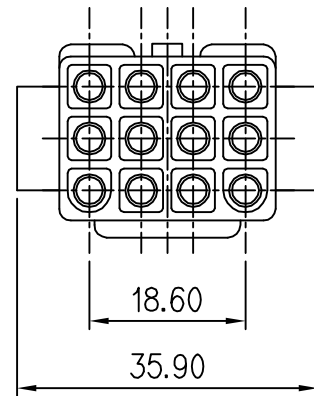
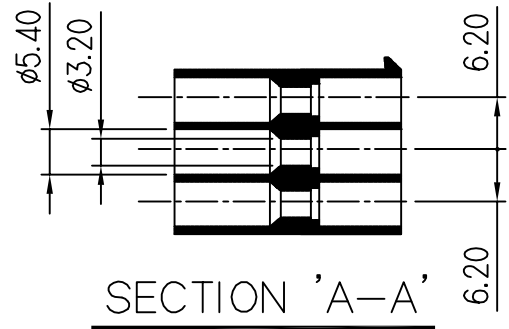


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

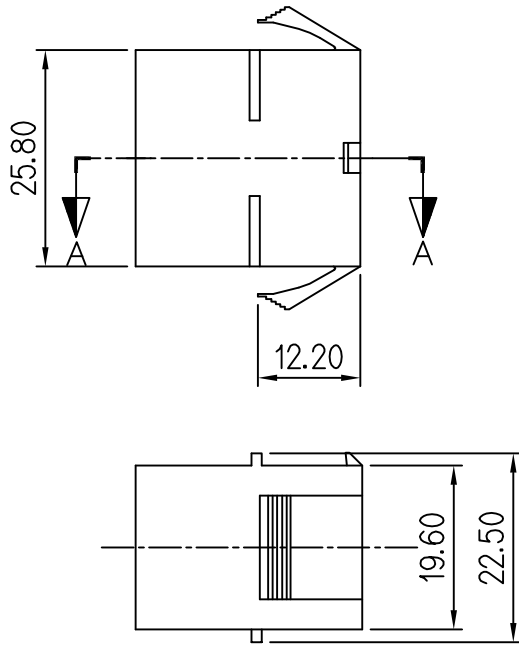

주 기


1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST750207-3, 750208-3, 750330-3
3. 적용 HOUSING: MG610020
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST750207-3, 750208-3, 750330-3
3. APPLICABLE HOUSING: MG610020
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

(DIMENSIONS IN MM)

ISSUE MARK

					MATERIAL		NYLON	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
					FINISH		NATURAL			
③	설계사양변경(S110128)근거 도면 재작성					'11.04.28		WIRE RANGE	CLASS	GP880931
②	명칭변경(전 Ø2.0 PIN 12P HSG)					'85.11.29				
①	제번 변경 (GP880931)					'85.09.13		INSULATION	TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	1/1	PART NO.
DR.  85 2/6		CHK.				① MG620019				
CHK. S. w 		APP. 				PART NAME				
						② Ø2.0 REC HOUSING 12P				