





GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



NO	P/NO	MATERIAL
1	MG620025	NYLON
2	MG620025T	PBT(V0급)

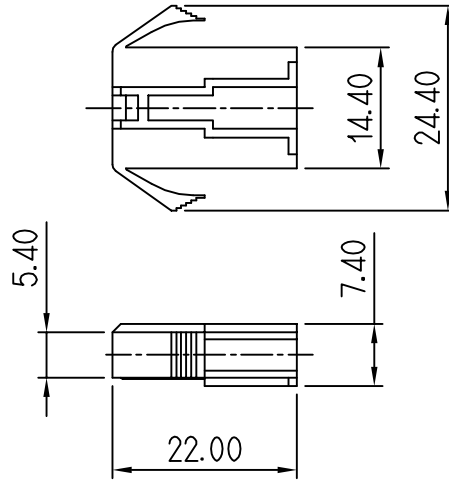

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST750293-3, 750294-3
3. 적용 HOUSING: MG610026, 610026T
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST750293-3, 750294-3
3. APPLICABLE HOUSING : MG610026, 610026T
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL	△ SEE TABLE	IKET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	NATURAL	
△ 3	실개사양변경(S110128)근거 도면 재작성	MIN			'11.04.28	WIRE RANGE		CLASS GP880934
△ 2	시방변경 S090052 근거 변경				'95.07.01	INSULATION		TYPE
△ 1	명칭 변경(전 Ø1.3 PIN 2P HSG)				'85.11.29	TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO. MG620025 MG620025T
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	1/1	
DR.	85 9/15	CHK.				PART NAME		
CHK.	S. W. K.	APP.						

△ Ø1.3 REC. HOUSING 3P