


GENERAL TOLERANCE (HOUSING)





USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

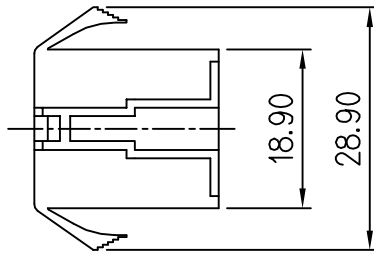

②

NO	P/NO	MATERIAL
1	MG620027	PA66 / V2급
2	MG620027R	PA66 / V0급



주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST750293-3, 750294-3
3. 적용 HOUSING: MG610028, 610028R
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST750293-3, 950294-3
3. APPLICABLE HOUSING : MG610028, 610028R
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL ③ SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH NATURAL	
③	실개사양변경(S110128)근거 도면 재작성			'11.04.28	WIRE RANGE	CLASS
②	시방변경 S090285 근거 변경	PJM		'09.09.28	INSULATION	TYPE
①	명칭 변경 (전 1.3 PIN 4P HSG)	KE		'85.11.29	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO. MG620027 MG620027R
DR.	85 9/11	CHK.			PART NAME	
CHK.	S. W. KE	APP.			① 1.3 REC. HOUSING 4P	