







SERIAL NUMBER  
 MG 620048

USED ON

MG610089



A 부분 확대 5x

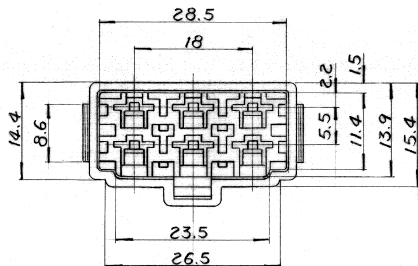

| NO | MAT'L | COLOR       |
|----|-------|-------------|
| 0  |       | NATURAL     |
| 1  |       | RED         |
| 2  |       | BLUE        |
| 3  |       | YELLOW      |
| 4  | NYLON | GRAY        |
| 5  |       | BLACK       |
| 6  |       | WHITE GREEN |
| 7  |       | BROWN       |
| 8  |       | GREEN       |

NOTE

1. 제품 THL은 ST 940253의 용인 SERIES  
 2. THL 고착력은 5.7kg 이상 유지.

△ 8kgf

CUSTOMER DRAWING

|                           |                       |                 |                    |                                     |
|---------------------------|-----------------------|-----------------|--------------------|-------------------------------------|
| RE MATERIAL               |                       | SEE TABLE       | KET<br>ENGINEERING | KOREA ELECTRIC<br>TERMINAL CO. LTD. |
| 표면처리(FINISH)              |                       | SEE TABLE       |                    |                                     |
| 전선단면적(WIRE RANGE)         |                       |                 | 사출 CLASS           |                                     |
| 절연피막(INSULATION DIA)      |                       |                 | 형식(TYPE)           | 7/22-2865                           |
| LTR                       | REV (REVISION RECORD) | DR              | DATE               | NO. (SCALE)                         |
| DR                        | 11.3.89               | CHK             | 11/2               | 2/1                                 |
| CHK                       | 11.3.89               | APP             | 11/2               | MG 620048                           |
| TOLERANCE EXCEPT AS NOTED |                       | ±0.3            |                    |                                     |
| DESIGNER (NAME)           |                       | 250 REC' HSG 6P |                    |                                     |