
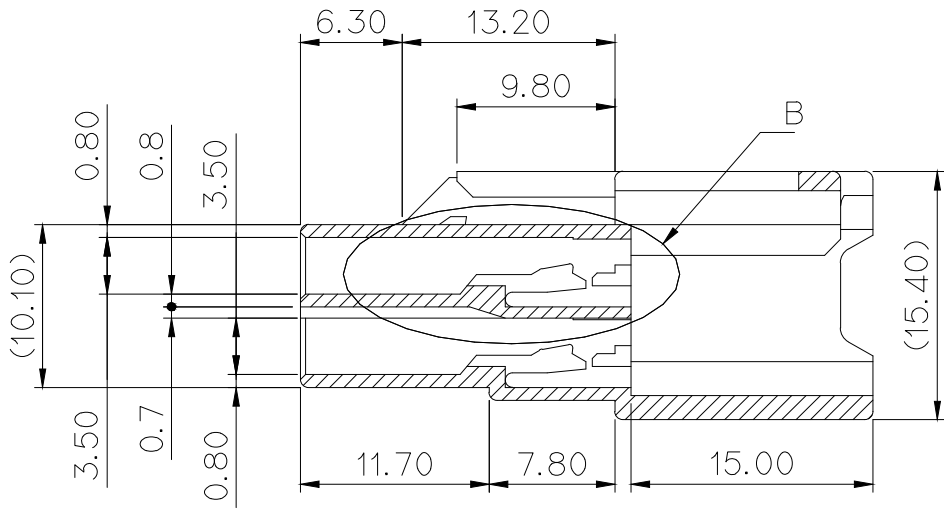


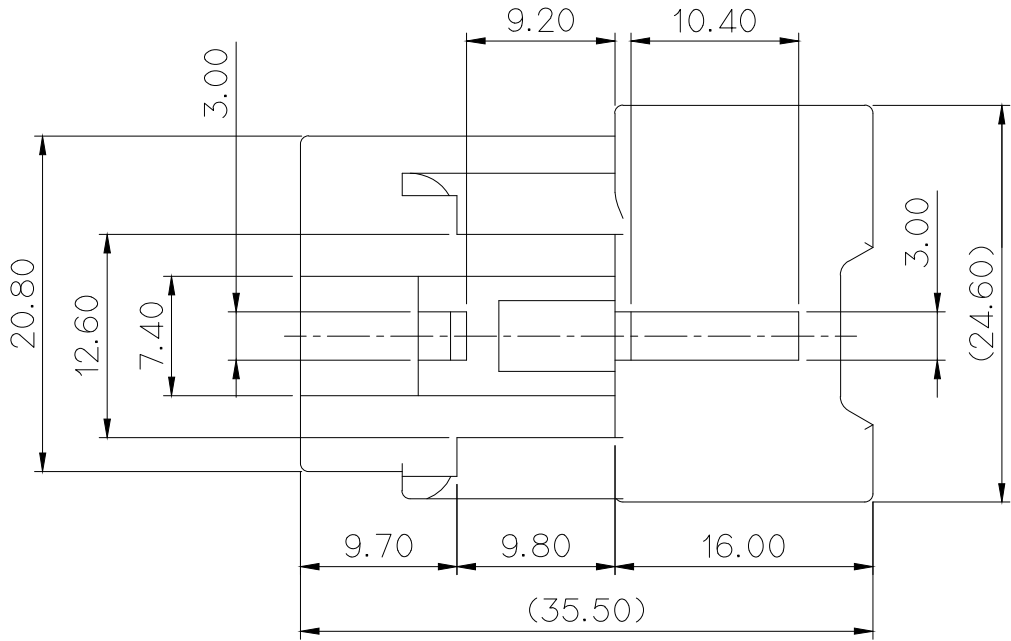


SECTION A-A

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE CONNECTOR: MG610054
- 3. APPLICABLE TERMINAL: ST740367,368
- 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.


GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

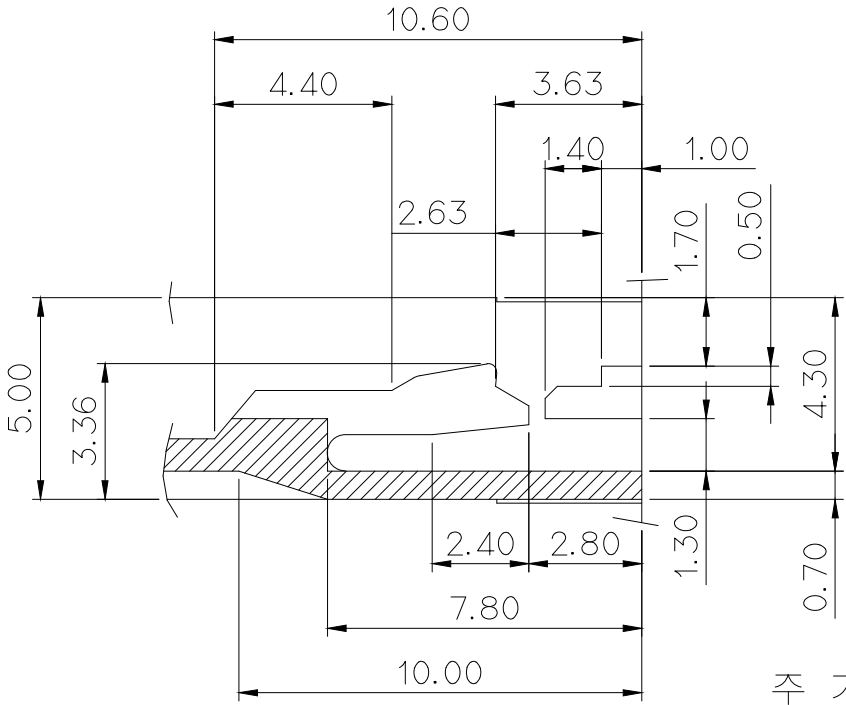

DETAIL B (5/1)

주 기

- 1. 기능상 유해한 BURR 및 변형등이 없을것.
- 2. 적용 HOUSING : MG610054
- 3. 적용 TERMINAL : ST740367,368
- 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

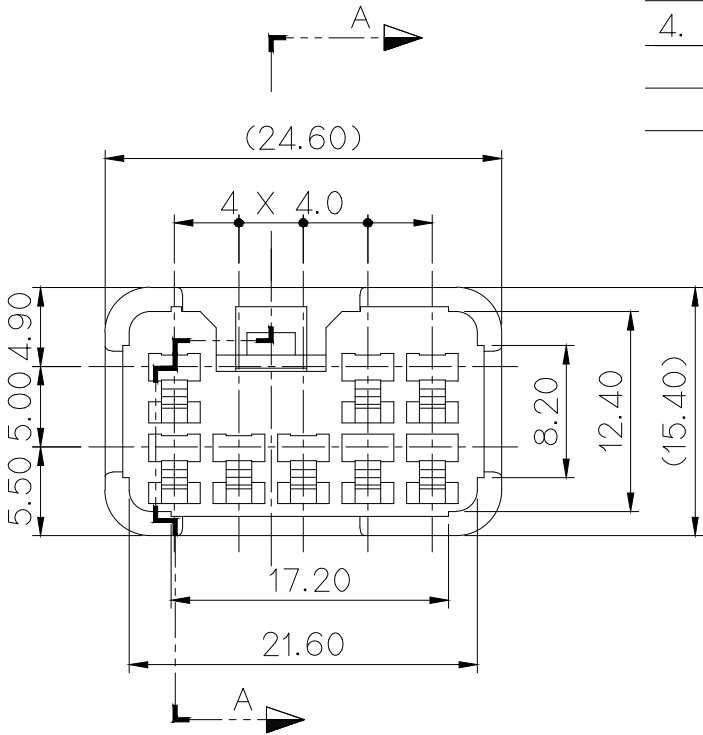

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL		NYLON		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		NATURAL			
					WIRE RANGE		CLASS			
	치수 및 치수선 지정 2곳				INSULATION		TYPE 7122-148U			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.3	SCALE 2/1	PART NO. MG620053
DR.		CHK.			PART NAME					
CHK.		JWK	APP.			Watanabe 2.3mm REC HSG 8P				

△	치수 및 치수선 정정 2곳	DR.	CHK.	APP.	DATE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.		CHK.			
CHK.	JWK	APP.	Watanabe		