

NOTE


1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE CONNECTOR: MG610058

3. APPLICABLE TERMINAL: ST740367,368

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

	NO.	MATERIAL	COLOR
*	0	NYLON66	NATURAL
	1		RED
	2		BLUE
*	3		YELLOW
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

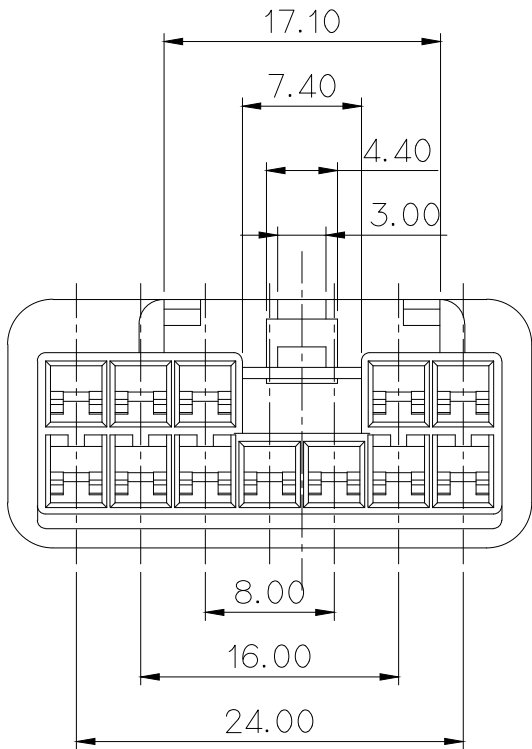


- 주 기
1. 기능상 유해한 BURR및 변형등이 없을것.


2. 적용 HOUSING : MG610058

3. 적용 TERMINAL : ST740367,368

4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

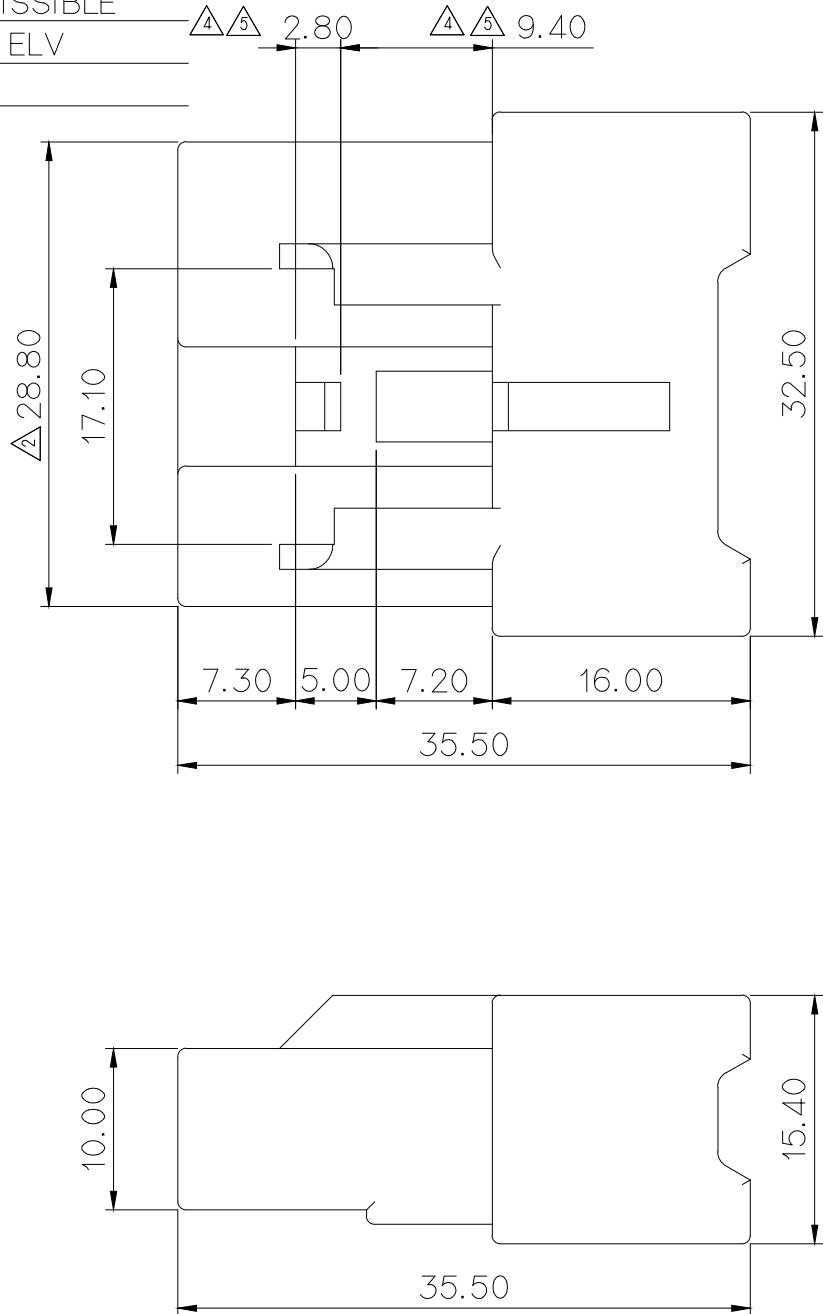


GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

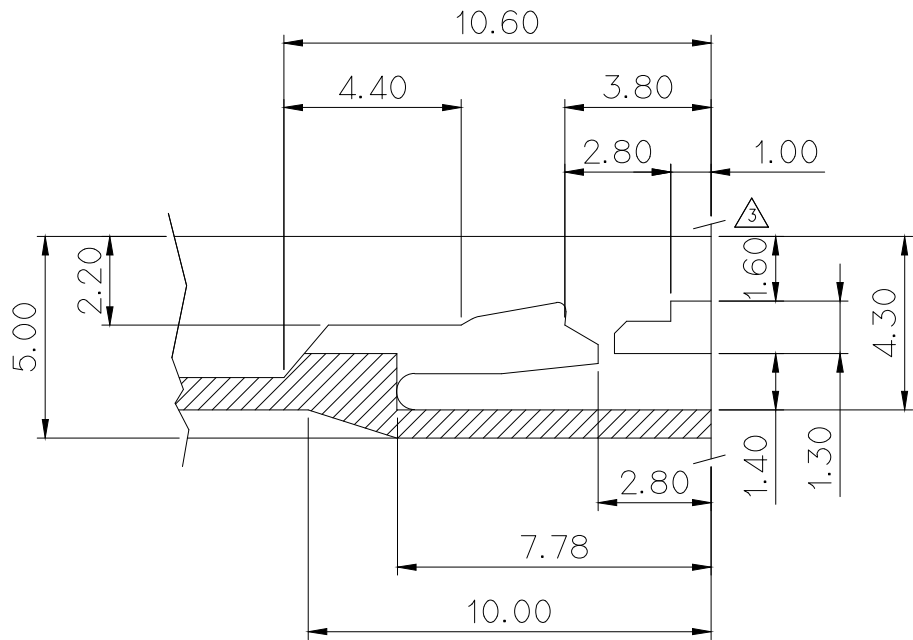

DETAIL B (5/1)

(SECTION A-A)

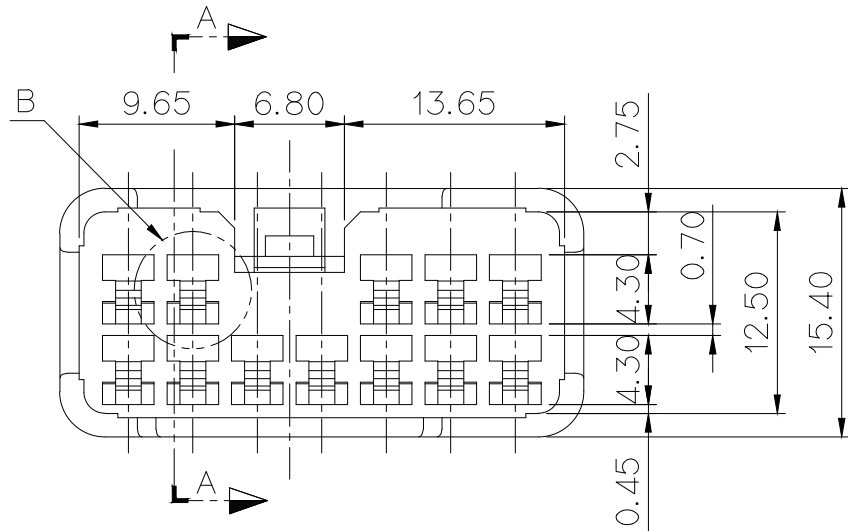

△5	치수변경 (2곳)	KCC	'96.03.27	MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
△4	CU 요구 치수 기입 (2곳)	KCC	'96.03.22	FINISH	SEE TABLE	
△3	GUIDE 부 삭제	KCC	'88.0823	WIRE RANGE		
△2	28.7 28.8 (설계전 변경)	KCC	'86.09.23	INSULATION		CLASS YAZAKI
△1	명칭 변경 (자체 변경)		'86.09.23			TYPE 7283-5667
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO. MG651711
DR.	MOOK, 990302	CHK.				LIF 32P PLUG ASS'Y
CHK.		APP.				

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK