


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

P/NO	MATERIAL
MG620090	NYLON
MG620090R	NYLON (GWIT)

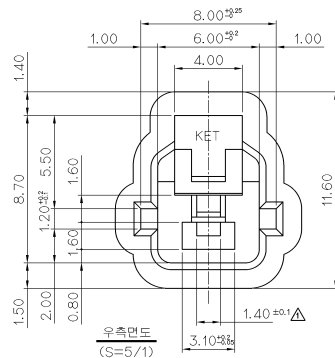

△ 주 기

1. 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을것.
2. 적용 TERMINAL : ST740393, 315, 187, 193
3. 적용 HOUSING : MG610089

△ NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740393, 315, 187, 193
3. APPLICABLE HOUSING : MG610089



					MATERIAL	PA66	KET (ENGINEERED)	KOREA ELECTRIC
					FINISH	NATURAL		TERMINAL CO., LTD.
⚠	도면 견인전에 따른 재작성 (주거만 추가)	ULL	가	가	05.08.05	WIRE RANGE	CLASS	
⚠	S040114 근거 P/NO 추가		가	가	04.08.25	INSULATION	TYPE	7118-3110
⚠	LANCE 치수 변경실입		가	가	92.01.16			
LTR	REVISION RECORD	DR	CHK	APP	DATE	REVISION REASON AS NOTED	SCALE 2/1	PART NO. MG620090
DR.	가 '87.06.17	CHK.			'87.06.25	SEE TABLE		
CHK.	S. W. K.	APP	가			PART NAME	PA 1M HOUSING	