

GENERAL TOLERANCE (HOUSING)

USED ON





10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 적용 TERMINAL: ST740334-3
적용 HOUSING : MG620128
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740334-3
APPLICABLE HOUSING : MG620128
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXA VALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

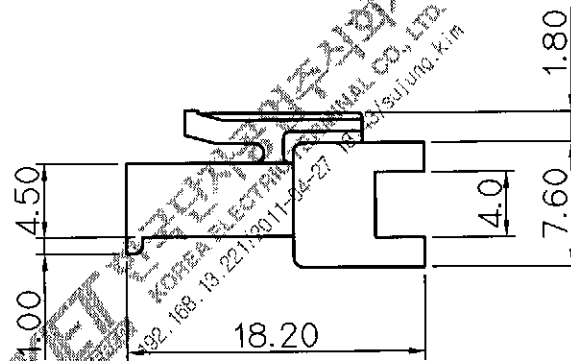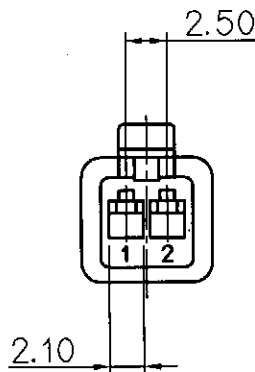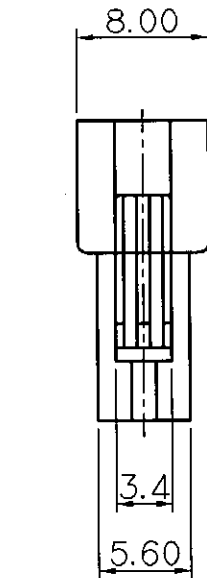

NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

					MATERIAL		NYLON		 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH		SEE TABLE			
					WIRE RANGE		CLASS			
					INSULATION		TYPE			SMR - 02
	설계시양변경 S110128 근거 수정		KSJ	KSJ	35%	'11.04.27		PART NO.		MG620129
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
DR.		 88.03.27	CHK.		 3.03.31	PART NAME				
CHK.		 S. W. Kwon	APP.		 N. J. Kim	1006R - 02				