


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

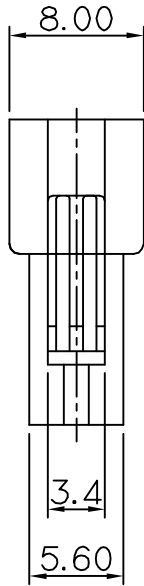


주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 적용 TERMINAL: ST740334-3
적용 HOUSING : MG620128
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740334-3
APPLICABLE HOUSING : MG620128
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

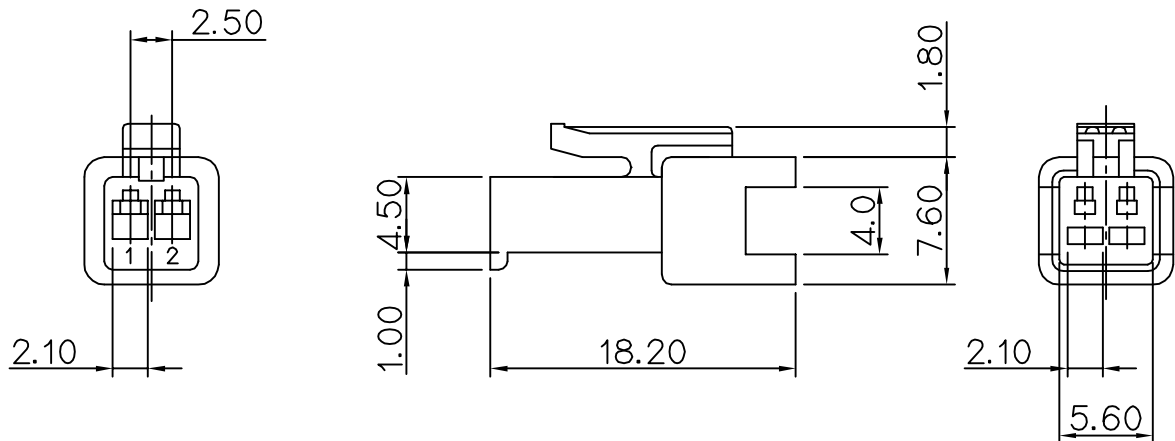

NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

				MATERIAL		NYLON		KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH		SEE TABLE			
				WIRE RANGE		CLASS			
				INSULATION		TYPE			
설계사양변경 S110128 근거 수정				KSJ				'11.04.27	
LTR		REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR.		88.03.27		CHK.		3.03.31		SCALE	
CHK.		S. w k e r		APP.				PART NO.	
								2/1	
								PART NAME	
								1006R - 02	