


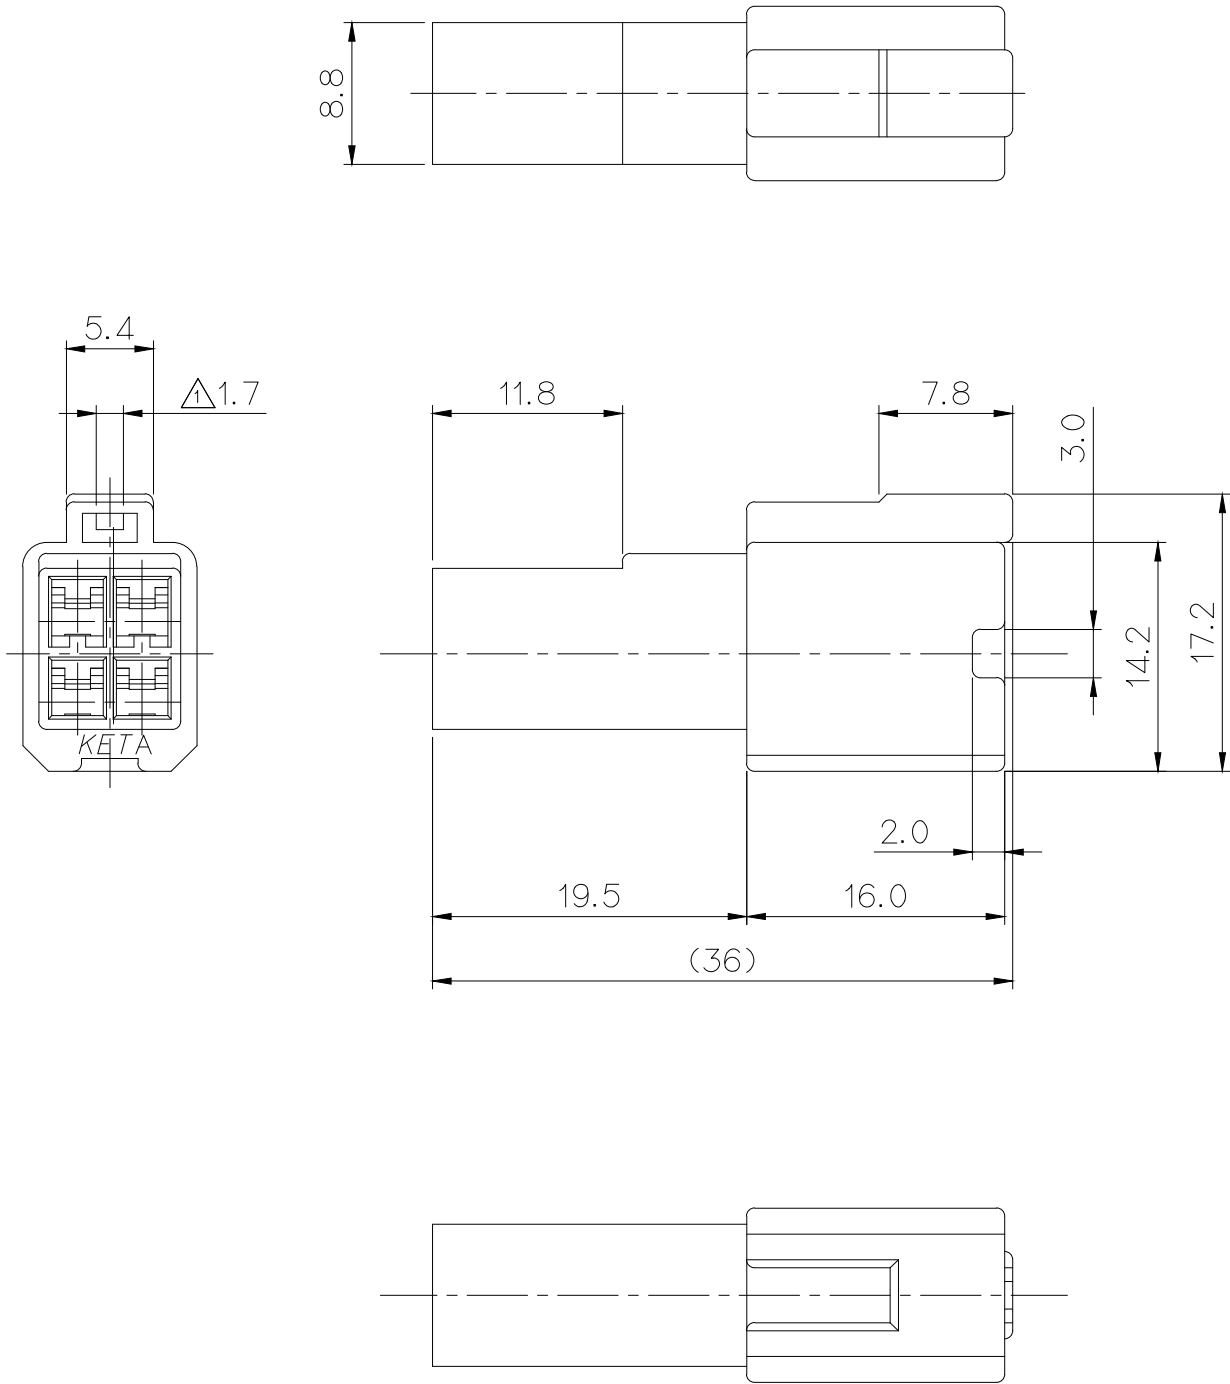

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	MG610185
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 적용 TERMINAL : ST740367-3, ST740368-3
- 적용 HOUSING : MG610159
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- APPLICABLE TERMINAL : ST740367-3, ST740368-3
- APPLICABLE HOUSING : MG610159
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE&RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

DIE NO

ISSUE MARK

					MATERIAL	SEE TABLE	KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS
					INSULATION		TYPE
					LTR	REVISION RECORD	PART NO.
					DR.	DG 88.07.29	MG620160
					CHK.	JWK	
					APP.	WATANABE	
					TOLERANCE EXCEPT AS NOTED		SCALE 2/1
					PART NAME		2.3mm REC. HSG 4P