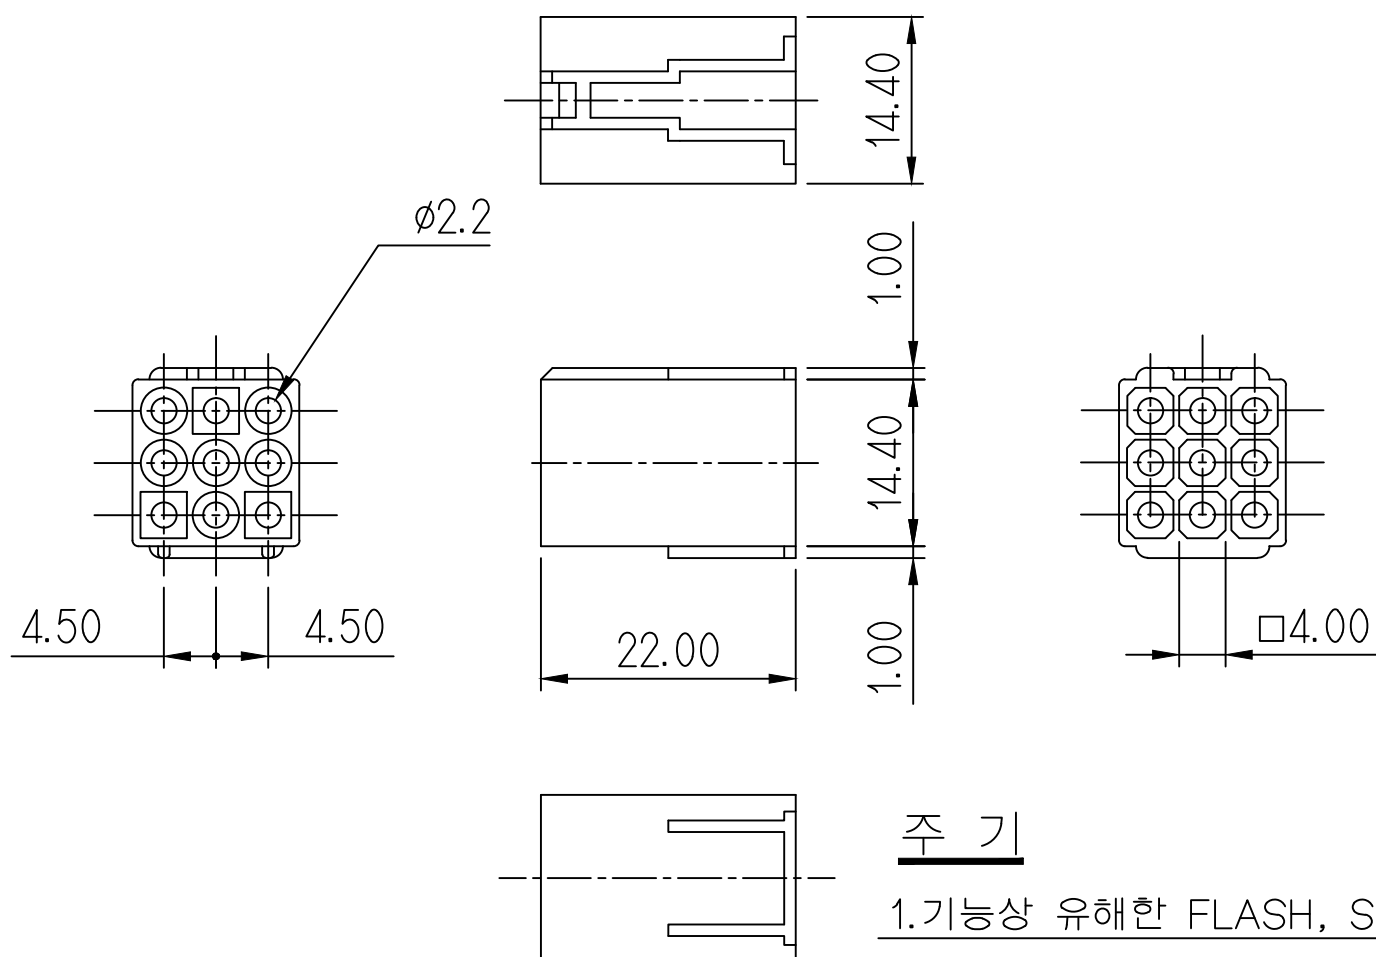


PART NO.
MG620201

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	MG620031
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST750293-3, 750294-3
- 3.적용 HOUSING:MG610032
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST750293-3, 750294-3
3. APPLICABLE HOUSING : MG610032
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL		NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		NATURAL	
					WIRE RANGE		CLASS	
					INSULATION		TYPE	
①	설계사양변경(S110128)근거 도면 재작성		DR.	CHK.	APP.	DATE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.		89.01.20	CHK.			PART NO.		
CHK.		5. w kcu	APP.			PART NAME		
						SEE TABLE		
						MG620201		
						Ø1.3 REC HOUSING 9P		