
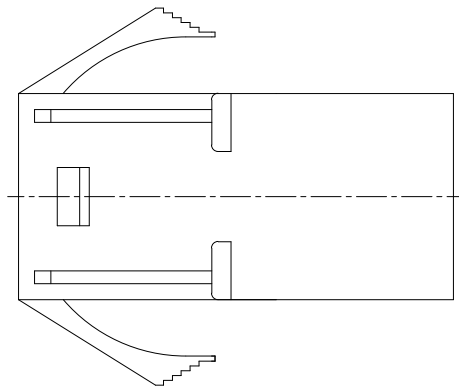
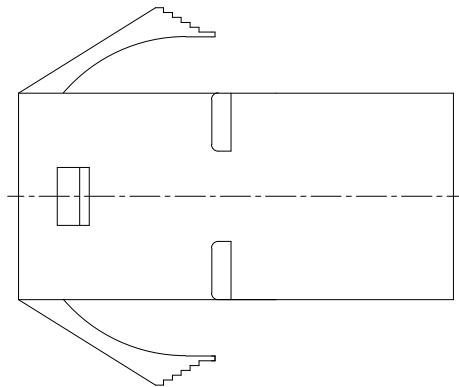
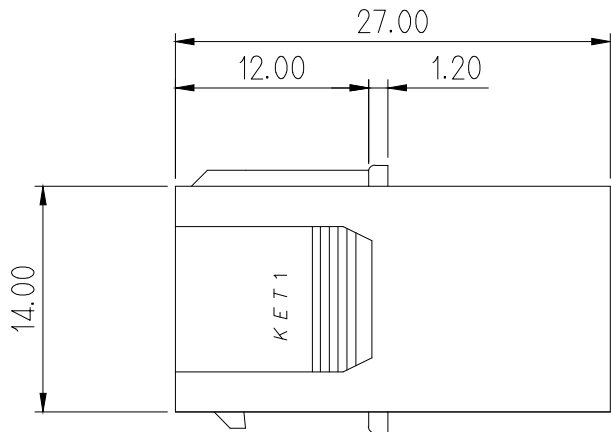


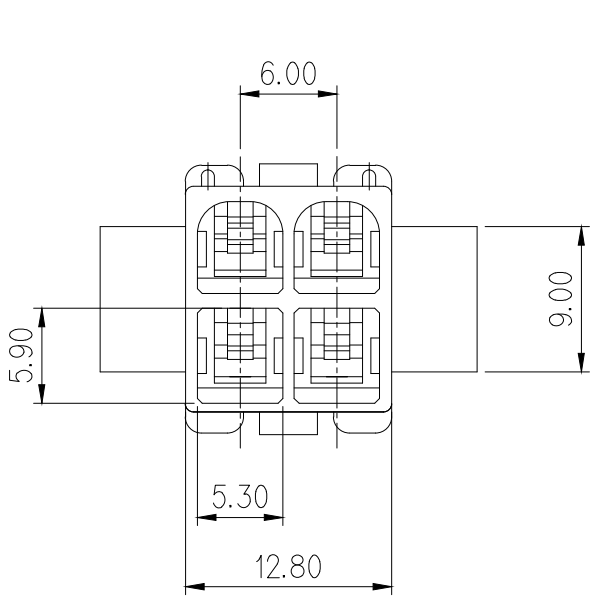

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 3.적용 HOUSING:MG610228,0228G
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△△△

NO	P/NO	MATERIAL
1	MG620229	PBT(V0)
2	MG620229G	PBT+PC(V0)
3	MG620429	PBT(V0)
4	MG620429T	PET+PC(GWIT)

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
3. APPLICABLE HOUSING :MG610228
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

1)날개 없는 TYPE P/NO : MG620429,0429T

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.			
④ ECO-1409-113 근거 도면 재작성		LCM KSH		BUC '14.09.19		FINISH SEE TABLE					
③ 설계사양변경(S110128)근거 도면 재작성		PJM				'11.04.28		WIRE RANGE		CLASS	
② 설계사양변경S070281 근거		PJM				'07.12.17		INSULATION		TYPE	
① 도면번호 오기로 인한 수정		PJM				'07.06.12		TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG620229/0229G ① MG620429/0429T
LTR REVISION RECORD		DR.		CHK.		APP.		DATE			
DR. 根 '90.2.22		CHK.		SH HAN		90.05.31		PART NAME		1806 4M HOUSING(A)	
CHK. J. w k		APP.		W. K. K							

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK