
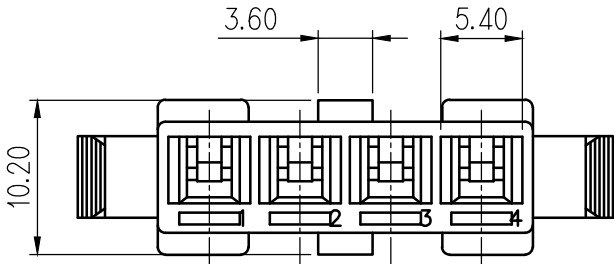


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△

NO	P/NO	MATERIAL
1	MG620231	PBT(V0)
2	MG620231G	PBT(GWIT)

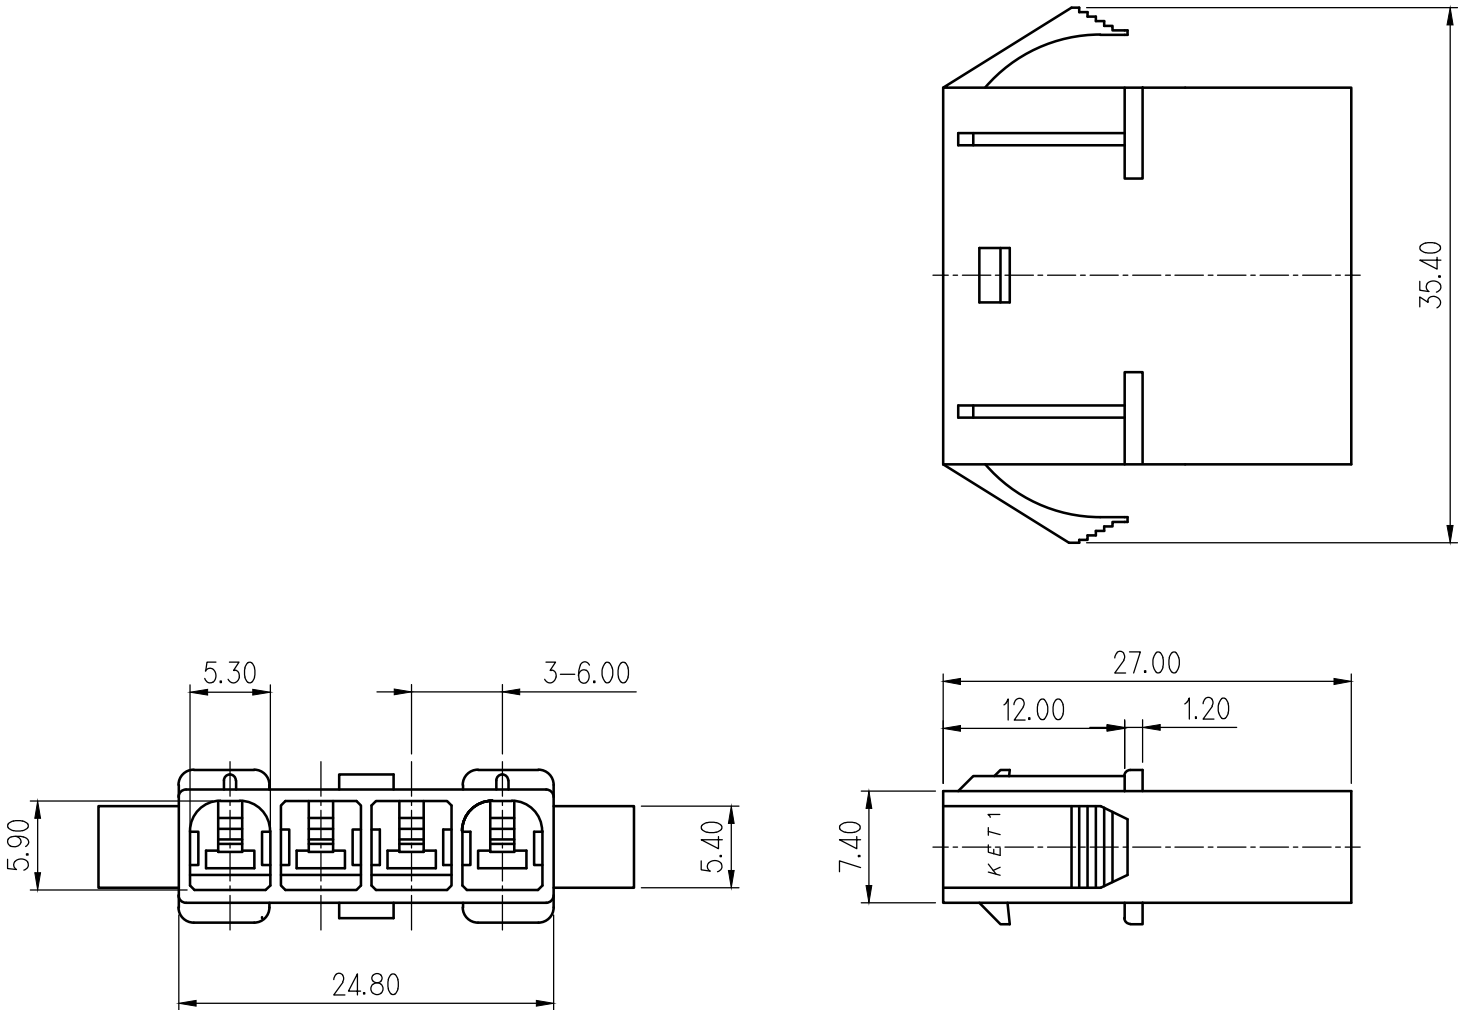

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
- APPLICABLE HOUSING :MG610230
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

1)날개 없는 TYPE P/NO : MG620428

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 적용 HOUSING:MG610230
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH SEE TABLE				
	설계사양변경(S110128)근거 도면 재작성				'11.04.28	WIRE RANGE		CLASS		
	도면번호 오기로 인한 수정	PJM			'07.06.12	INSULATION		TYPE		
	S050241 근거 수정	MIN			'05.10.14					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
DR. 根 '90.2.22		CHK. SH HAN		90.05.31		SEE TABLE		2/1	 MG620231/620231G	
CHK. S. w koo		APP. 		PART NAME						
1806 4M HOUSING(B)										