


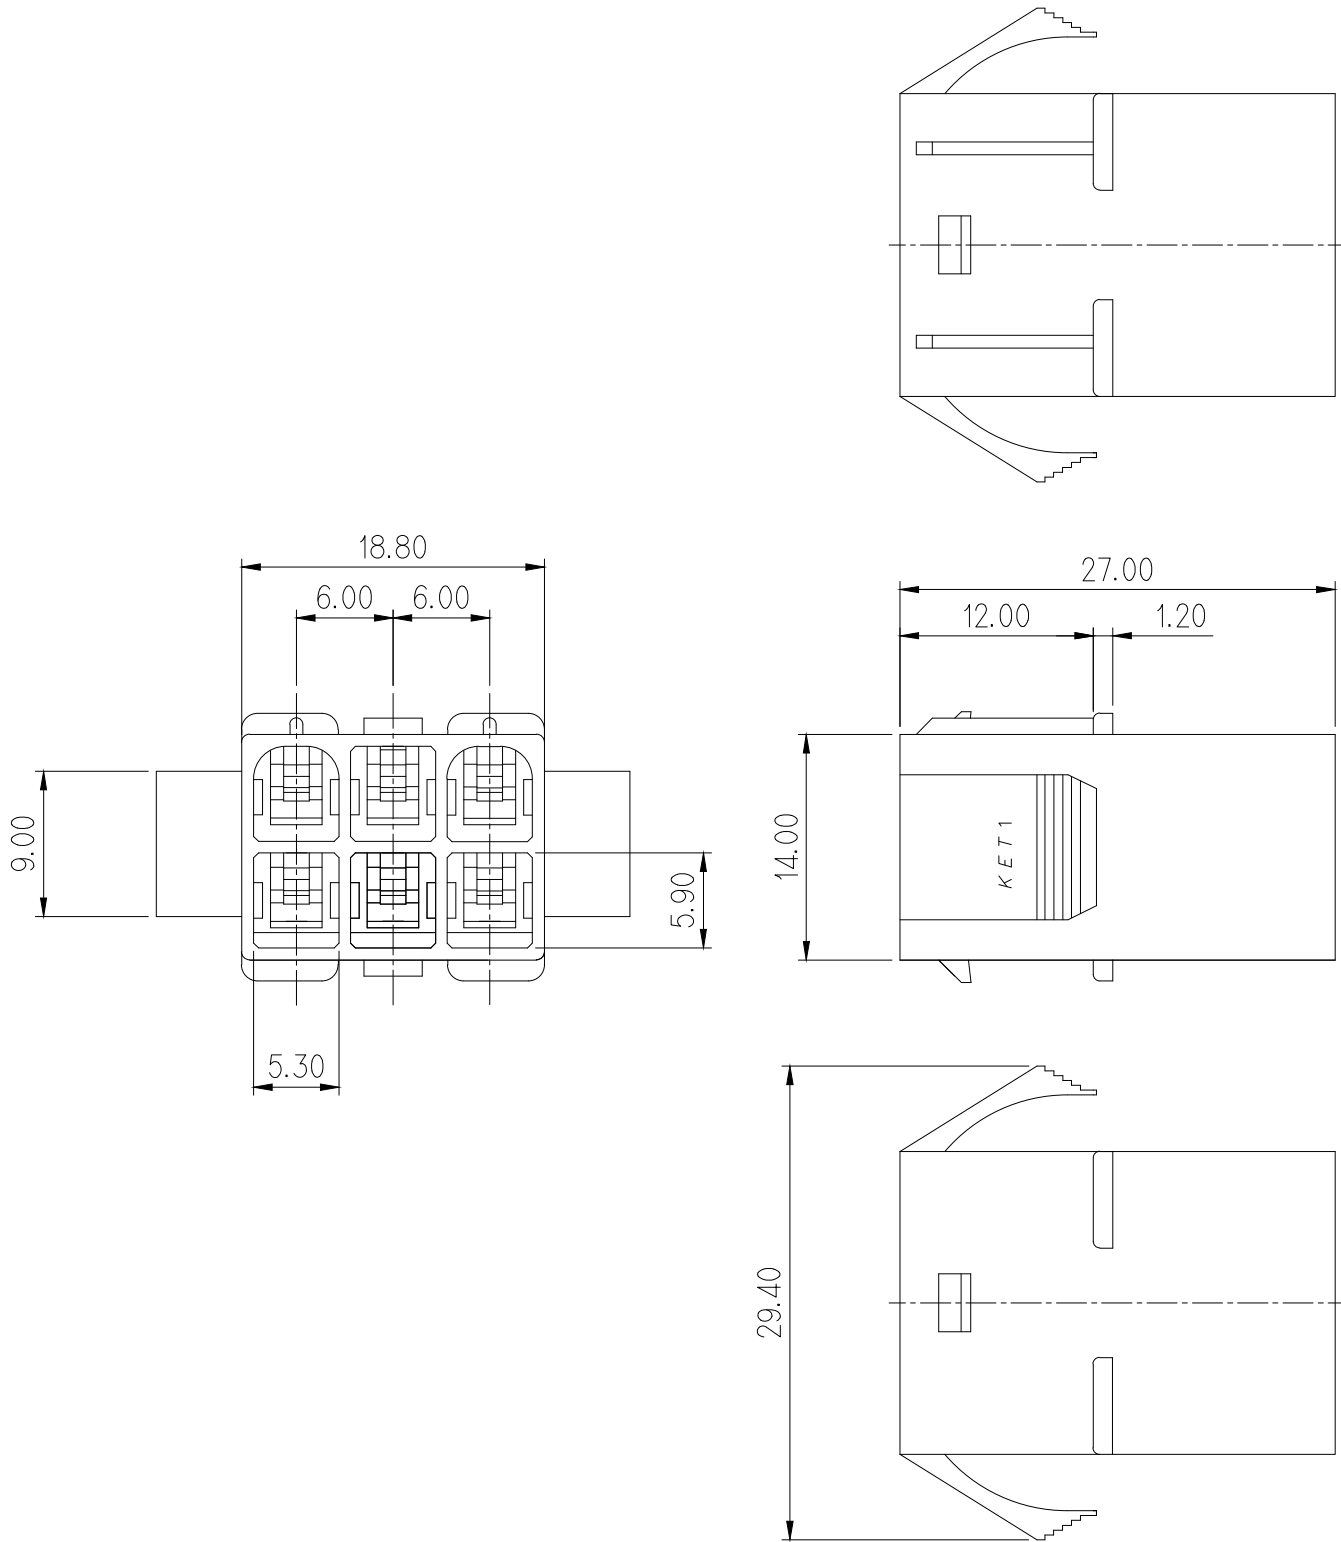

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 3.적용 HOUSING:MG610232,610232G
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△△

NO	P/NO	MATERIAL
1	MG620233	PBT(V0)
2	MG620233G	PBT+PC(V0)
3	MG620233T	PET+PC(GWIT)
4	MG620430	PBT(V0)
5	MG620430T	PET+PC(GWIT)

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

NOTE

- 1. MUST BE FREE OF FLASH, SINK,WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
- 3. APPLICABLE HOUSING :MG610232,610232G
- 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

1)날개 없는 TYPE P/NO : MG620430

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
④	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19	FINISH SEE TABLE		
③	설계사양변경(S110128)근거 도면 재작성	4/20	4/20	4/20	'11.04.28	WIRE RANGE		
②	도면번호 오기로 인한 수정	PJM	PJM		'07.06.12	CLASS		
①	S050241 근거 수정	MIN	MIN		'05.10.14	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. ①
DR.	根 '90.2.22	CHK.	SH HAN	90.05.31	PART NAME			
CHK.	S. w	APP.	W. J		1806 6M HOUSING			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK