
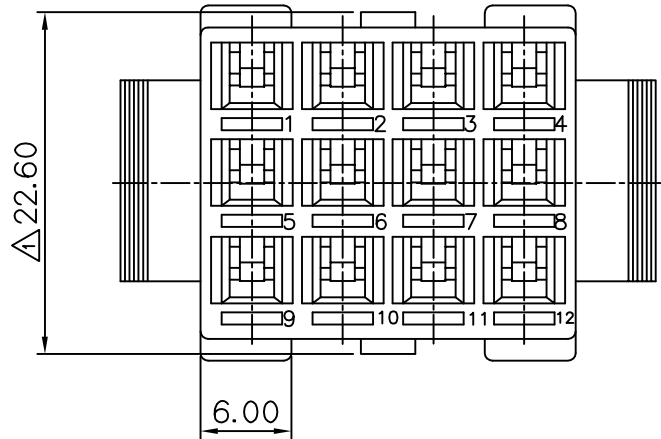
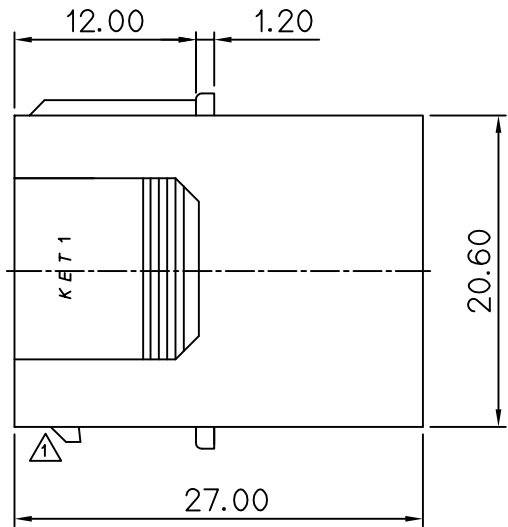
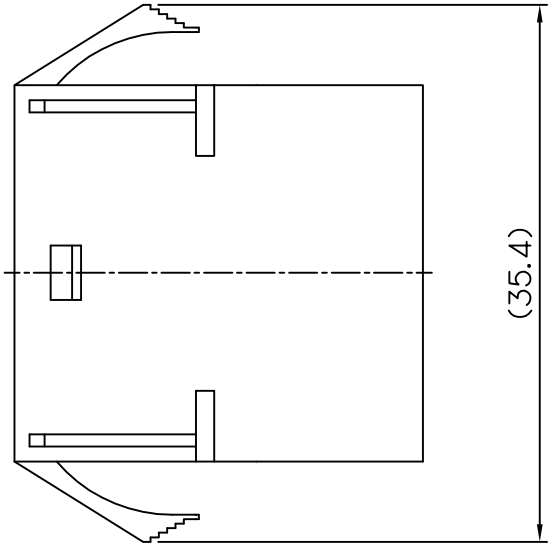


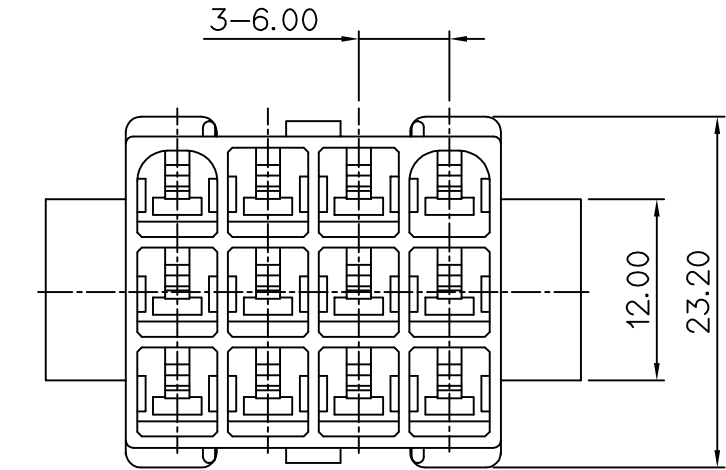

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	LIGHT GREEN

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

- 주 기
- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2.적용 TERMINAL : ST740463,464,465,466-3
 - 3.적용 HOUSING:MG610236
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - 2. APPLICABLE TERMINAL : ST740463,464,465,466-3
 - 3. APPLICABLE HOUSING :MG610236
 - 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL	PBT	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	
2	설계사양변경(S110128)근거 도면 재작성	KSH	5/9	'11.04.28		INSULATION		TYPE	
1	설계사양변경(S060229) 근거 수정	JJY	9/11	90.08.17		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG620237
LTR REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME			
DR.		CHK. SH HAN 90.05.31				1806 PLUG 12P HS'G			
CHK. S. W. K		APP. 9/11							