
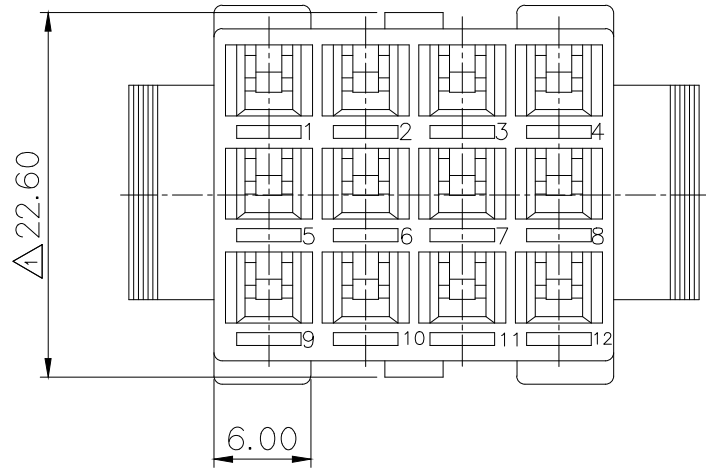
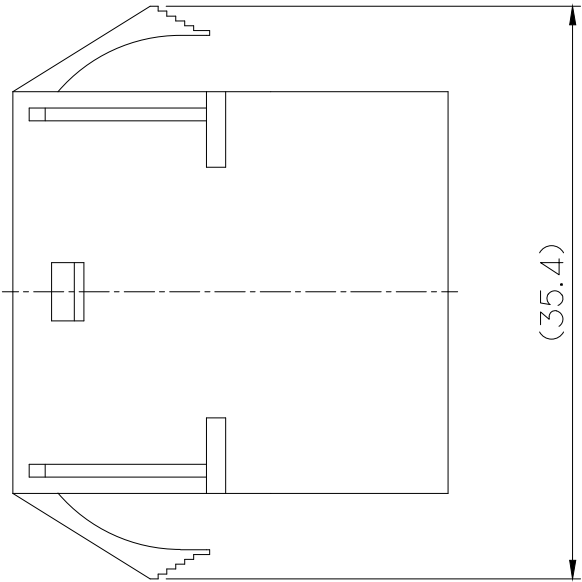
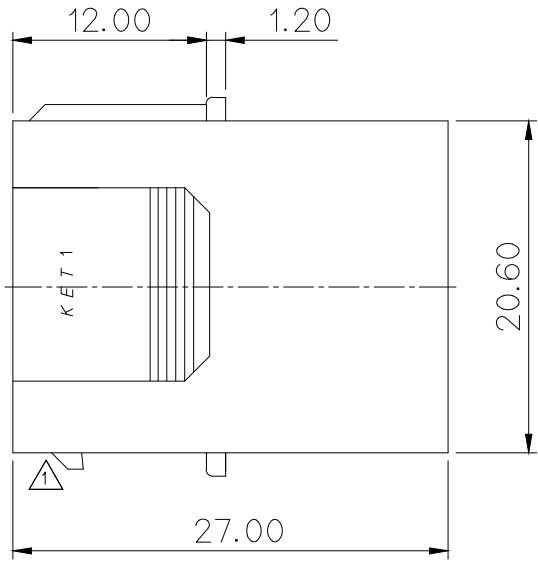


NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	LIGHT GREEN

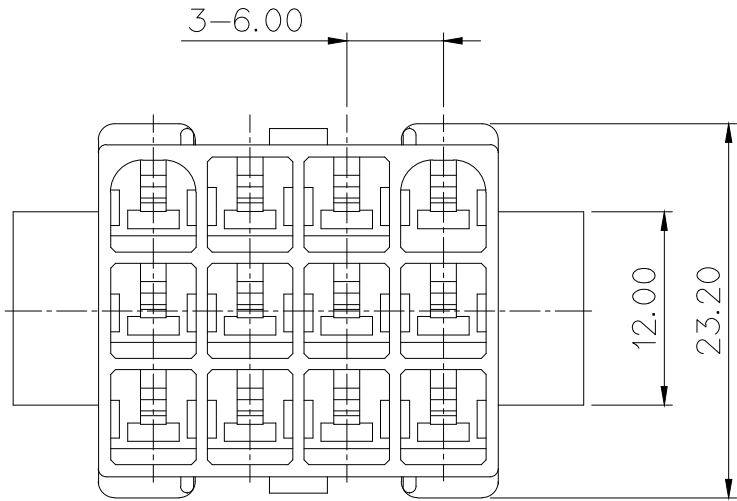

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST740463,464,465,466-3
- 적용 HOUSING:MG610236
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740463,464,465,466-3
- APPLICABLE HOUSING :MG610236
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL PBT		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
2	설계사양변경(S110128)근거 도면 재작성	KSH	——	'11.04.28	WIRE RANGE		CLASS	
1	설계사양변경(S060229) 근거 수정	JJY		90.08.17	INSULATION		TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG620237
DR.		CHK. SH HAN			90.05.31	PART NAME		
CHK. S. W. K		APP. 			1806 PLUG 12P HS'G			