


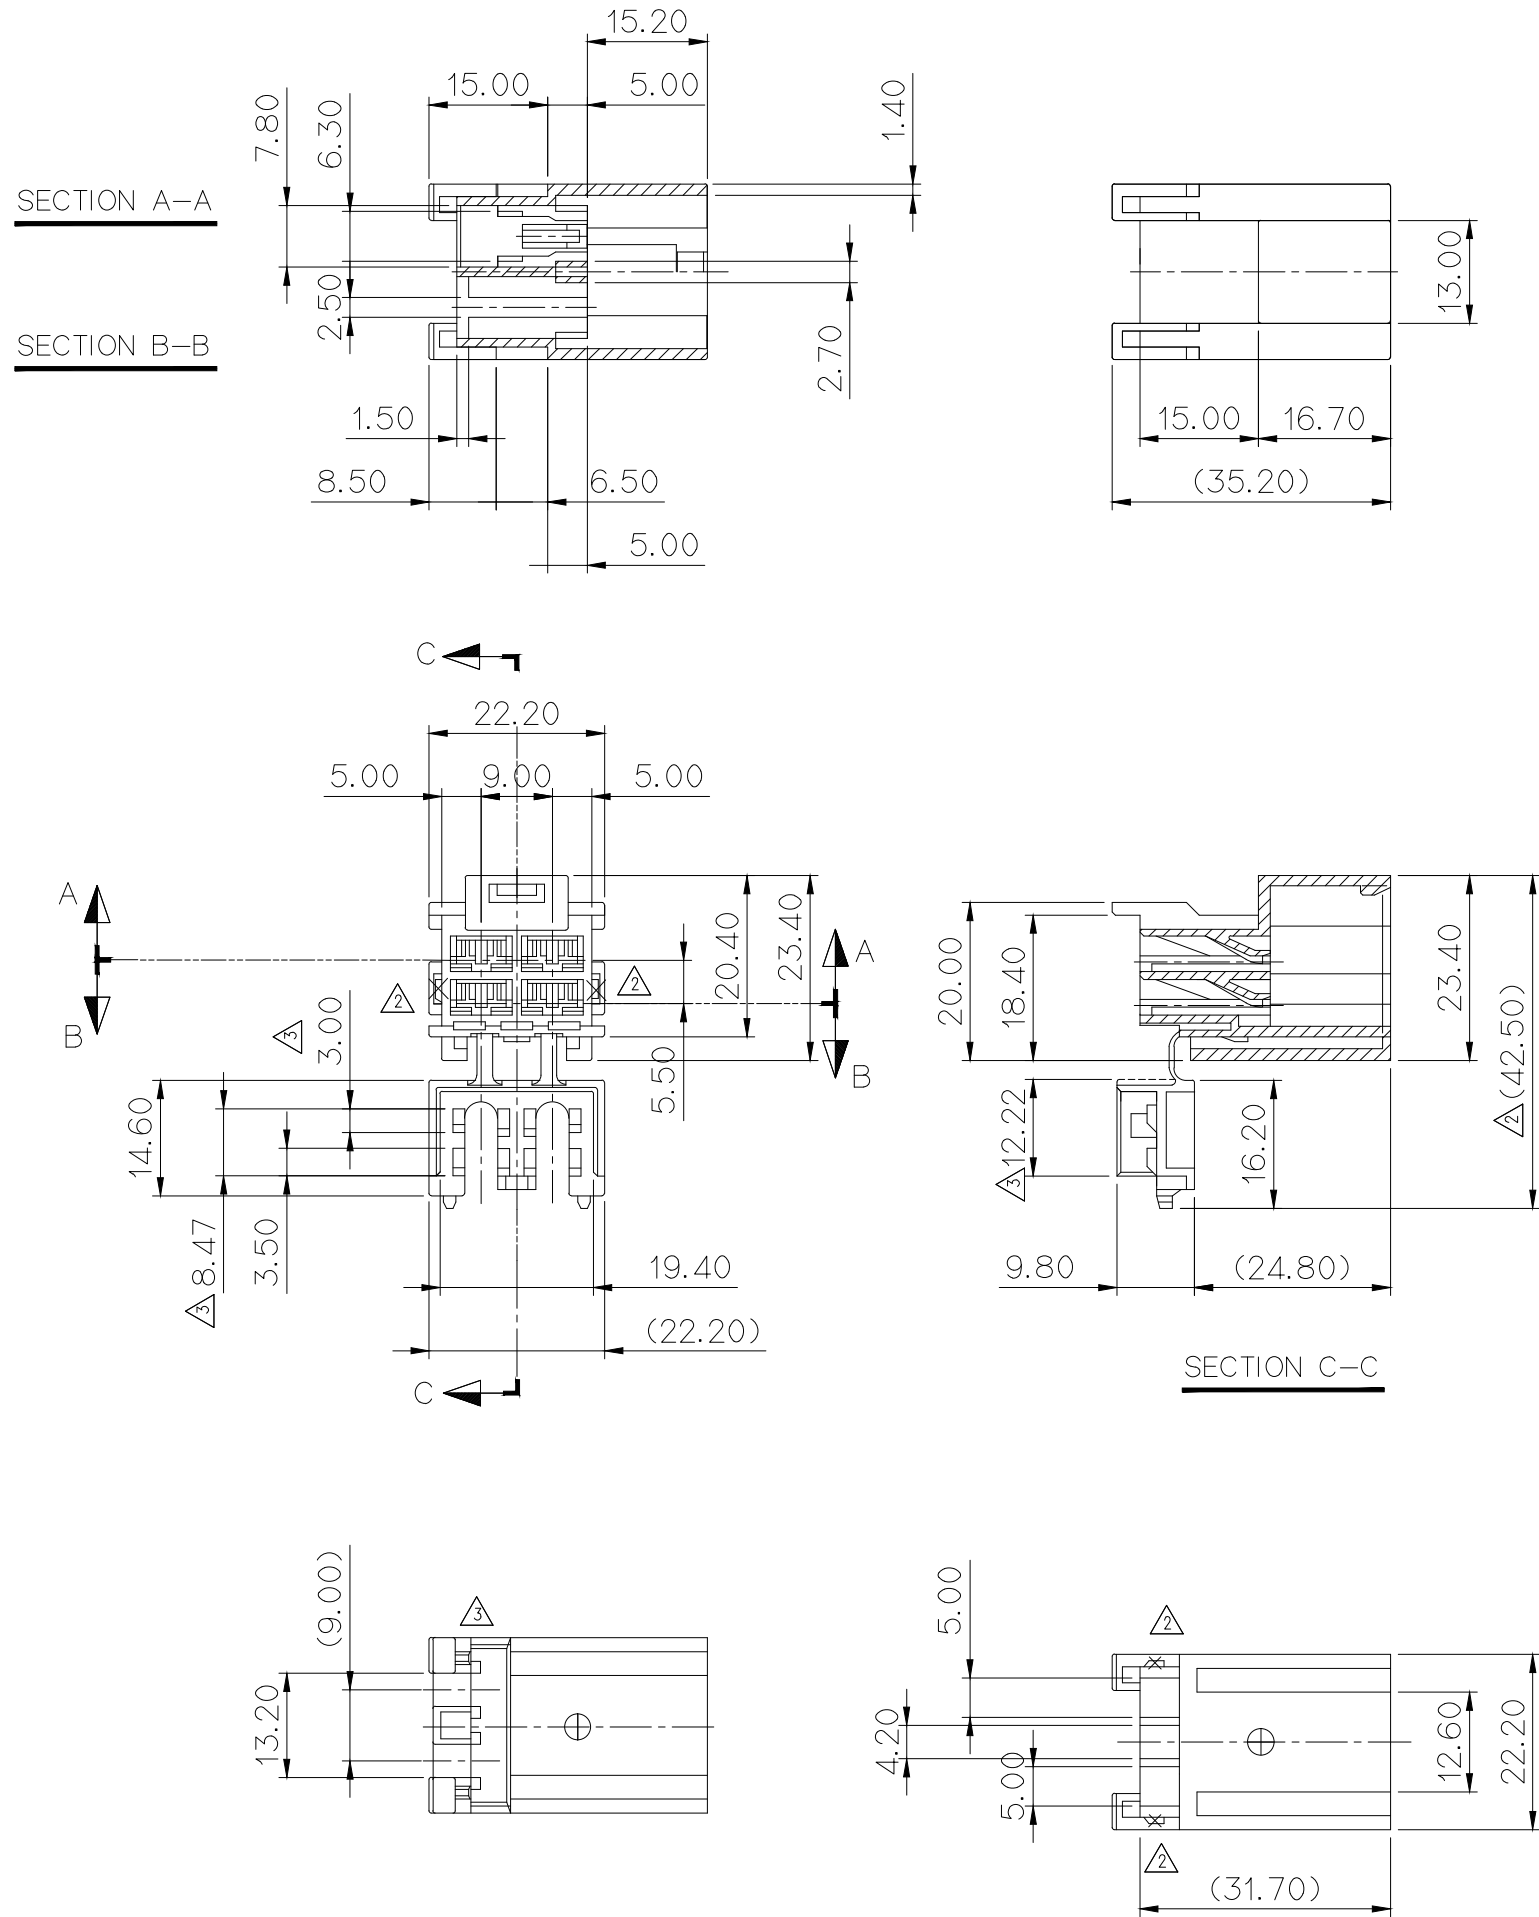

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	ST740470
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

③	NO.	MATERIAL	COLOR
*	0	NYLON	NATURAL
	1		RED
*	2		BLUE
	20		JADE
3	YELLOW		
4	GRAY		
40	DARK GRAY		
41	LIGHT GRAY		
*	5		BLACK
	6		DARK GREEN
	7	BROWN	
	8	LIGHT GREEN	
	9	MAGENTA	
	11	ORANGE	

NOTE

- | |
|---|
| 1.MUST BE FREE OF BURR, WEDLINE |
| AND IMPERFECTION THAT AFFECT FUNCTION |
| 2.APPLICATION TERMINAL : ST740470, 740471, 740472 |
| 3.APPLICATION HOUSING : MG610267 |
| 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, |
| MERCURY, CADMIUM, HEXAVALENT CHROMIUM, |
| PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM |
| PERMISSIBLE CONCENTRATION PRESCRIBED UNDER |
| EU ELV DIRECTIVE & RoHS REGULATION. |

주 기

1. 제품기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST740470, 740471, 740472
- 3.적용 HOUSING : MG610267
- 4.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
	ECO-1604-333 근거도면변경 (도면현실화 및 매칭부 유격축소)	YSS CKY LSY	'16.05.26		WIRE RANGE	CLASS	
	시방NO980174 근거수정	JIN — —	'98.08.19		INSULATION	TYPE	
	형상변경(HINGE,ROUND 추가)	WON — —	'95.09.01				
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.2	SCALE 2/1	PART NO. MG 620266
DR.	— 93.02.17	CHK.			PART NAME .250 DOUBLE LOCK PLUG 4P		
CHK.	Z:\2D Modeling\3DCC\3DCCC-jpg	APP.	Z:\2D Modeling\3DCC-app_and-plug-and-term				