



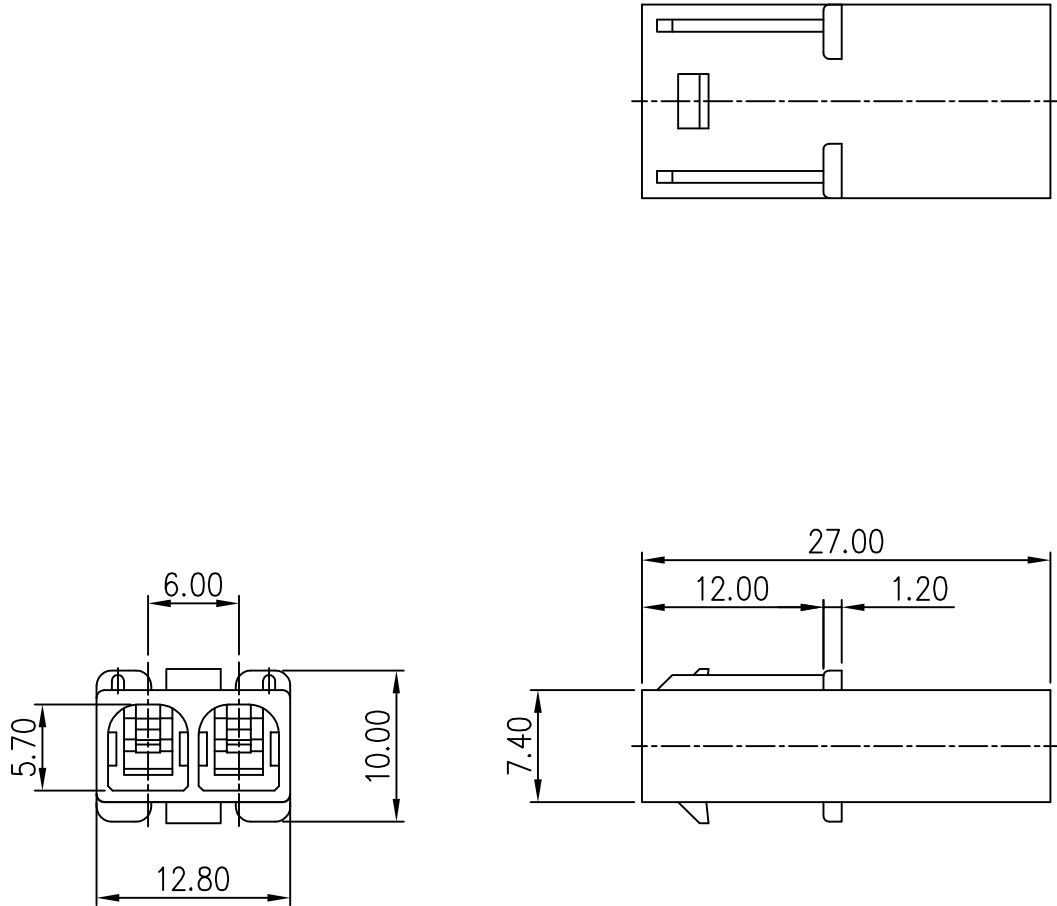

NO.	COLOR
0	NATURIAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

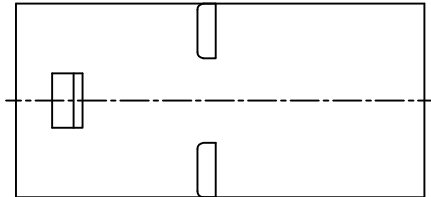

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	MG610224
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 3.적용 HOUSING:MG610224, 610224G
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
3. APPLICABLE HOUSING :MG610224, 610224G
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL	PBT	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
⚠	설계사양변경(S110128)근거 도면 재작성	KSH	5/9/11	'11.04.28		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG620426
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME			
	DR. S. W. K	'91.09.07	CHK. S. W. K	APP. S. W. K		1806 REC' 2P HS'G FOR MALE TERM'			

ISSUE MARK