
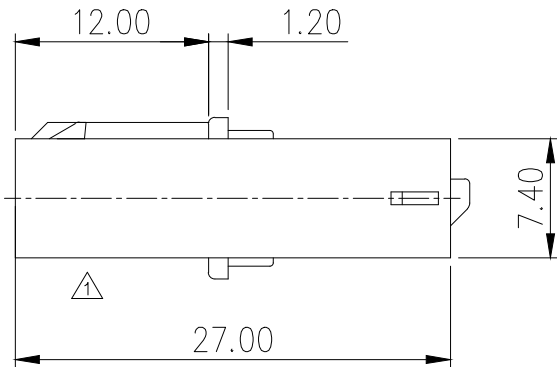
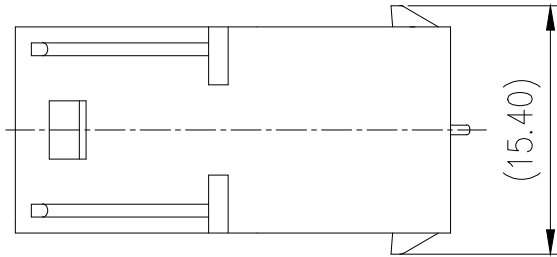
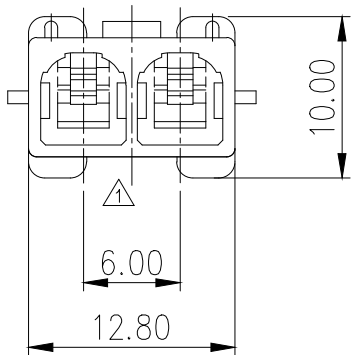


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

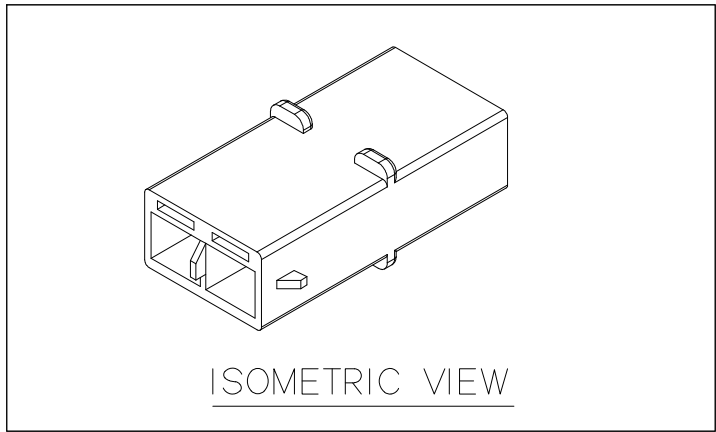

	△2	
NO.	COLOR	
* 0	NATURAL	
* 1	RED	
* 2	BLUE	
* 5	BLACK	

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST741130-3,1266-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 터미널 : ST741130-3,1266-3
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL <u>△4</u> PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
<u>△4</u>	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19	FINISH SEE TABLE			
<u>△3</u>	ECO-1405-073근거 도면 재작성	LCM	KSH	BUC	'14.06.02	WIRE RANGE		CLASS	1806
<u>△2</u>	ECO-1401-161근거 도면 재작성	PJM	근거	근거	14.01.20			TYPE	
<u>△1</u>	ECO-1107-175근거 도면 재작성	PJM	근거	근거	11.07.12	INSULATION		PART NO. MG620426S	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE			
DR. P.J.M '08.10.30		CHK.	근거	10/30		PART NAME		1806 2M HS'G	
CHK.		APP.	근거	10/30					

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK