
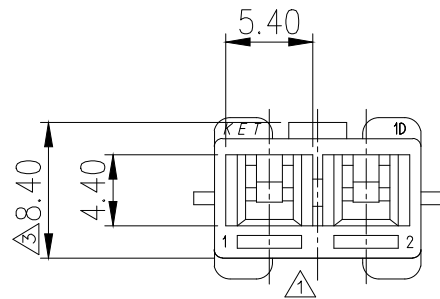
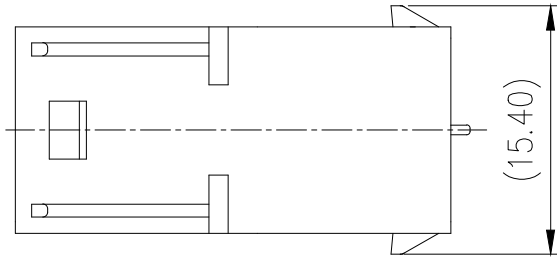
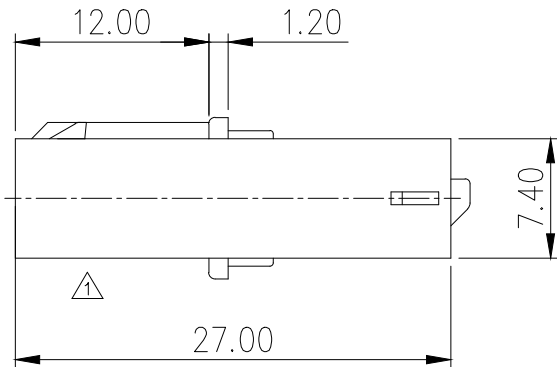



 5/2	NO.	COLOR
*	0	NATURAL
*	1	RED
*	2	BLUE
	3	YELLOW
	4	GRAY
*	5	BLACK
	6	GREEN

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST741130-3,1266-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

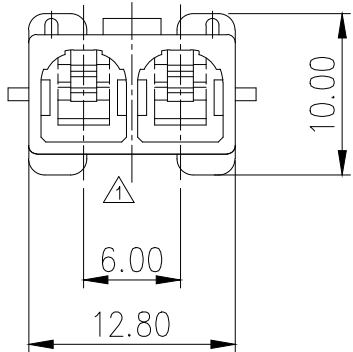

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

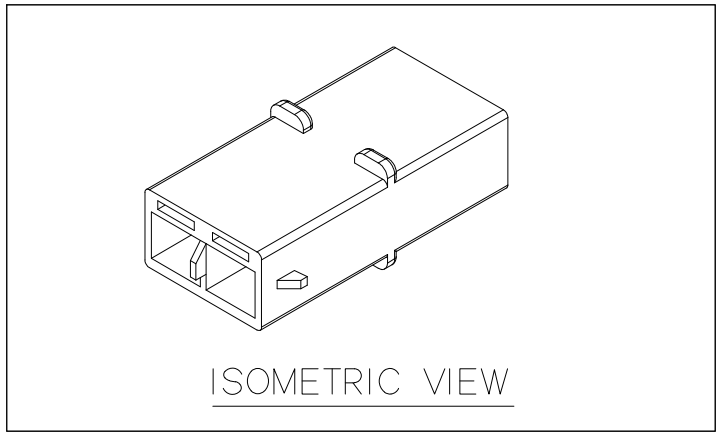

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 터미널 : ST741130-3,1266-3
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

5	ECO-1910-417근거 도면 제작성	YHJ	KSH	KHG	'19.10.31	MATERIAL 4 PET+PC(GWIT)		IKET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
4	ECO-1409-113 근거 도면 제작성	LCM	KSH	BUC	'14.09.19	FINISH SEE TABLE		
3	ECO-1405-073근거 도면 제작성	LCM	KSH	BUC	'14.06.02	WIRE RANGE		CLASS 1806
2	ECO-1401-161근거 도면 제작성	PJM	근거	근거	14.01.20	INSULATION		TYPE
1	ECO-1107-175근거 도면 제작성	PJM	근거	근거	11.07.12	TOLERANCE EXCEPT AS NOTED SEE TABLE		PART NO. MG620426S
LTR REVISION RECORD		DR.	CHK.	APP.	DATE	SCALE 2/1		
DR. P.J.M '08.10.30		CHK.	근거		10/30	PART NAME		
CHK.		APP.	근거		10/30	1806 2M HS'G		

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK