PART NO. MG620426T

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	MG610224
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

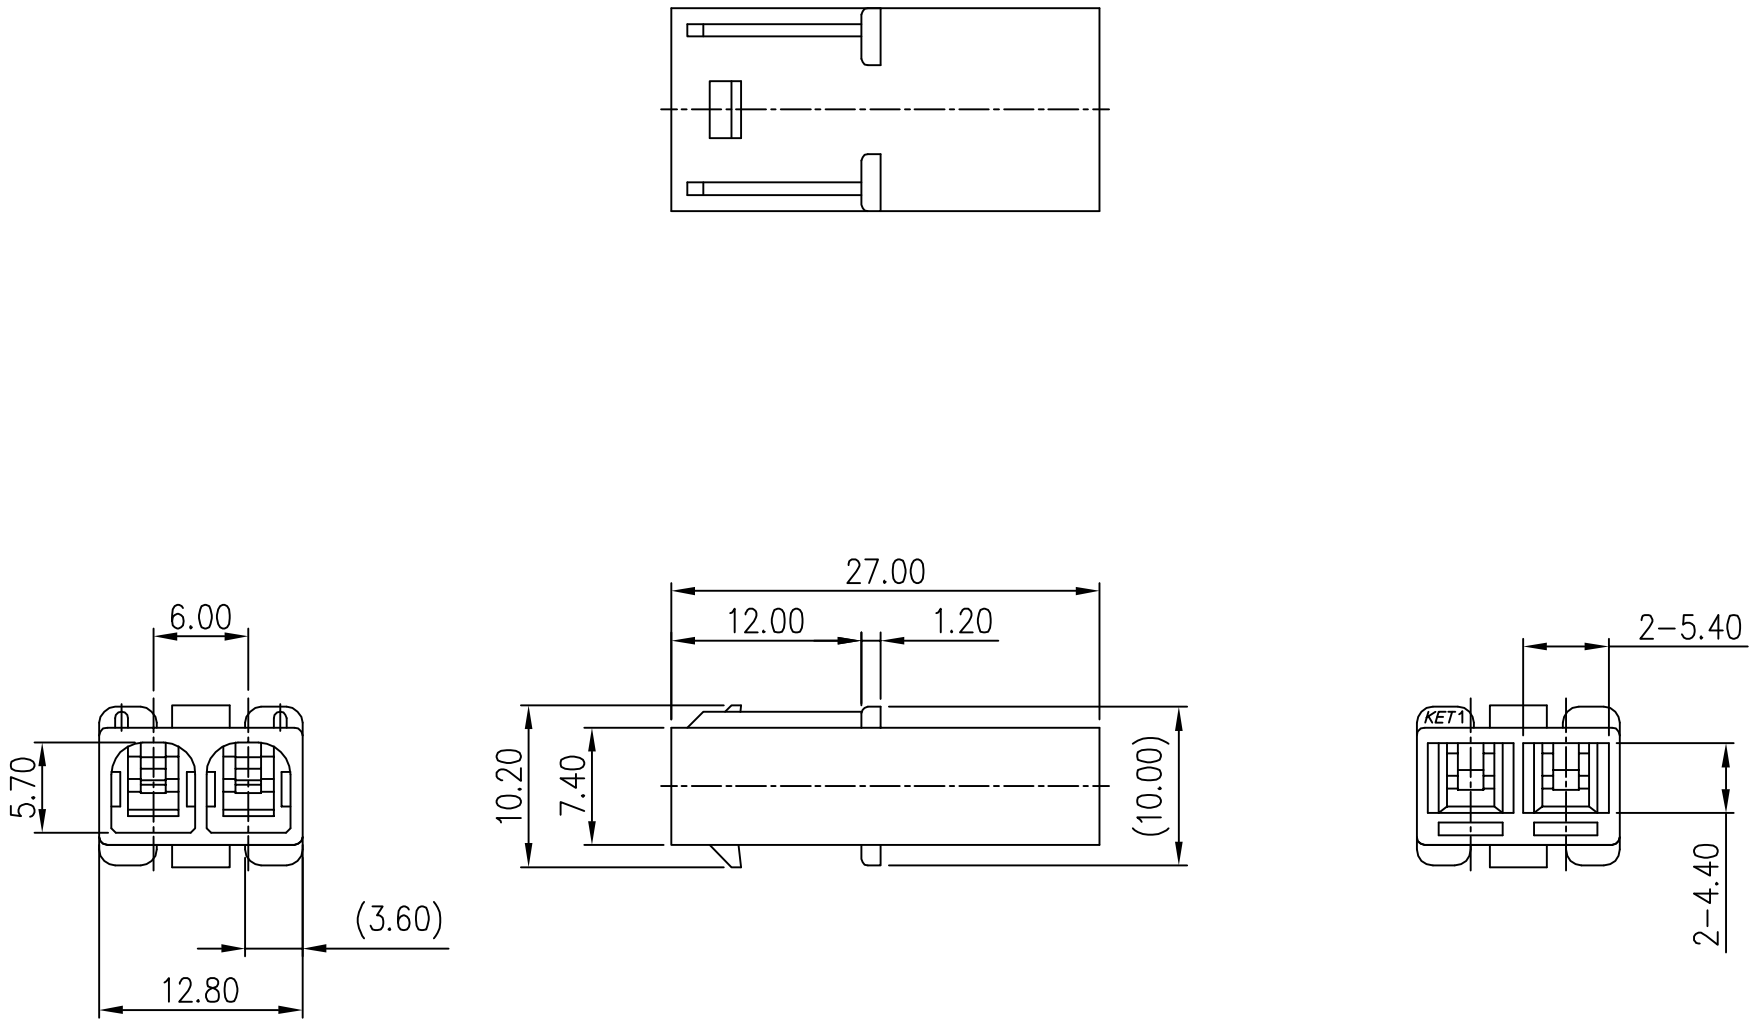

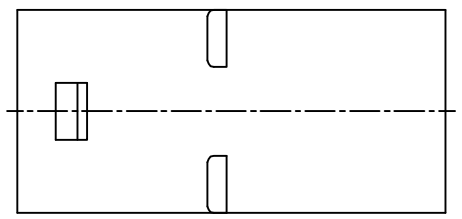

주 기

1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
2.적용 TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
3.적용 HOUSING : MG610224T
4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
3. APPLICABLE HOUSING : MG610224T
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	COLOR
0	NATURIAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE

DR.	SMG '14.06.09	CHK.	PSH '14.06.09
CHK.	KSH '14.06.09	APP.	BUC '14.06.09

MATERIAL	PET+PC (GWIT)	KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH	SEE TABLE		
WIRE RANGE		CLASS	
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG620426T	
PART NAME 1806 REC' 2P HS'G			

(DIMENSIONS IN MM)