

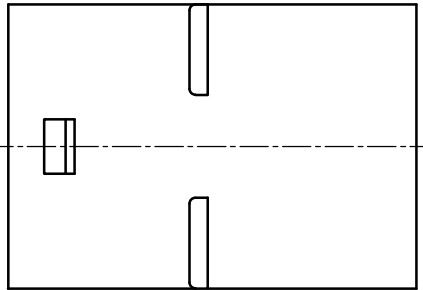
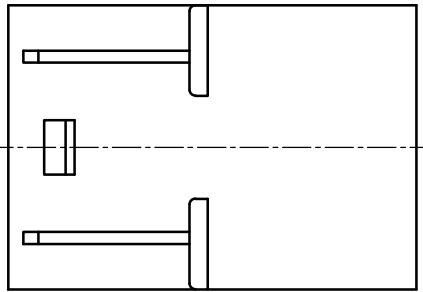



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

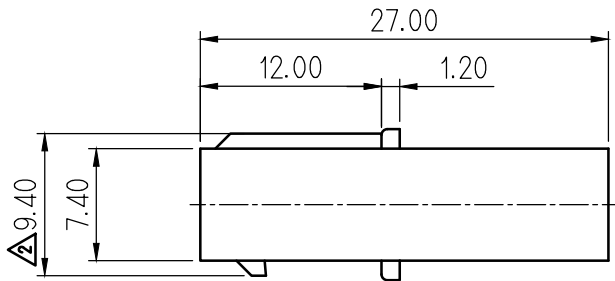

NO	P/NO	MATERIAL
1	MG620427	PBT
2	MG620427G	PBT(GWIT)

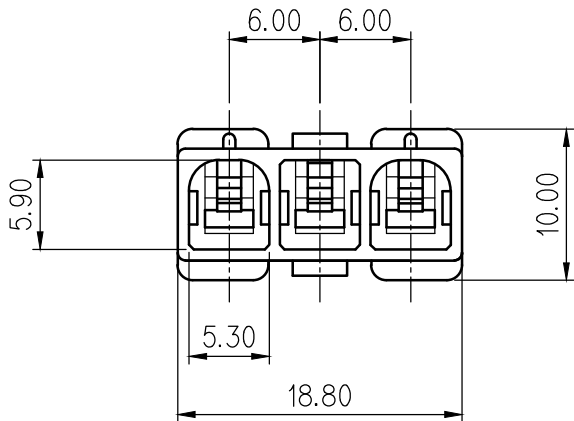

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740463-3, 740464-3
ST740465-3, 740466-3
- APPLICABLE HOUSING :MG610226,MG610226G
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST740463-3, 740464-3
ST740465-3, 740466-3
- 적용 HOUSING:MG610226,MG610226G
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
3	설계사양변경(S110128)근거 도면 재작성				'11.04.28	WIRE RANGE		CLASS
2	S080058근거 도면 수정	CJH 			'09.11.06	INSULATION		TYPE
1	S040114근거 P/NO 추가				'04.08.25	TOLERANCE EXCEPT AS NOTED SEE TABLE		PART NO. MG620427/MG620427G
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 2/1		
DR.	京 '90.2.22	CHK. 				PART NAME		1806 3M HOUSING
CHK.	S. w 	APP. 						